

» User Guide «

CP305

**3U CompactPCI Processor Board based on
the Intel® Atom™ Processor N270 with
the Mobile Intel® 945GSE Express Chipset**

Doc. ID: 1035-7168, Rev. 2.0
February 11, 2011



Revision History

Publication Title:		CP305: 3U CompactPCI Processor Board based on the Intel® Atom™ Processor N270 with the Mobile Intel® 945GSE Express Chipset
Doc. ID:		1035-7168
Rev.	Brief Description of Changes	Date of Issue
1.0	Initial issue	29-Sep-2009
2.0	Added description for the CP305-TR Module	11-Feb-2011

Imprint

Kontron Modular Computers GmbH may be contacted via the following:

MAILING ADDRESS

Kontron Modular Computers GmbH
Sudetenstraße 7
D - 87600 Kaufbeuren Germany

TELEPHONE AND E-MAIL

+49 (0) 800-SALESKONTRON
sales@kontron.com

For further information about other Kontron products, please visit our Internet web site: www.kontron.com.

Disclaimer

Copyright © 2011 Kontron AG. All rights reserved. All data is for information purposes only and not guaranteed for legal purposes. Information has been carefully checked and is believed to be accurate; however, no responsibility is assumed for inaccuracies. Kontron and the Kontron logo and all other trademarks or registered trademarks are the property of their respective owners and are recognized. Specifications are subject to change without notice.



Table of Contents

<i>Revision History</i>	<i>ii</i>
<i>Imprint</i>	<i>ii</i>
<i>Disclaimer</i>	<i>ii</i>
<i>Table of Contents</i>	<i>iii</i>
<i>List of Tables</i>	<i>ix</i>
<i>List of Figures</i>	<i>xiii</i>
<i>Proprietary Note</i>	<i>xv</i>
<i>Trademarks</i>	<i>xv</i>
<i>Environmental Protection Statement</i>	<i>xv</i>
<i>Explanation of Symbols</i>	<i>xvi</i>
<i>For Your Safety</i>	<i>xvii</i>
<i>High Voltage Safety Instructions</i>	<i>xvii</i>
<i>Special Handling and Unpacking Instructions</i>	<i>xvii</i>
<i>General Instructions on Usage</i>	<i>xviii</i>
<i>Two Year Warranty</i>	<i>xix</i>
1. Introduction	1 - 3
1.1 <i>Board Overview</i>	1 - 3
1.2 <i>Board-Specific Information</i>	1 - 4
1.3 <i>Optional Modules</i>	1 - 5
1.3.1 <i>CP305-HDD Module</i>	1 - 5
1.3.2 <i>CP305-TR Module</i>	1 - 5
1.3.3 <i>CP-RIO3-04 Rear I/O Module</i>	1 - 5
1.4 <i>System Relevant Information</i>	1 - 5
1.5 <i>Board Diagrams</i>	1 - 6
1.5.1 <i>Functional Block Diagram</i>	1 - 6
1.5.2 <i>Front Panel</i>	1 - 7
1.5.3 <i>Board Layout</i>	1 - 8
1.6 <i>Technical Specification</i>	1 - 9
1.7 <i>Kontron Software Support</i>	1 - 13
1.8 <i>Standards</i>	1 - 14
1.9 <i>Related Publications</i>	1 - 16



2. Functional Description	2 - 3
2.1 CPU, Memory and Chipset	2 - 3
2.1.1 CPU	2 - 3
2.1.2 Memory	2 - 4
2.1.3 Intel® 945GSE Express Chipset Overview	2 - 4
2.1.4 Mobile Intel® 945GSE Express Graphics Memory Controller Hub ..	2 - 4
2.1.5 I/O Controller Hub ICH7-M	2 - 5
2.2 Peripherals	2 - 5
2.2.1 Timer	2 - 5
2.2.2 Watchdog Timer	2 - 5
2.2.3 Battery	2 - 6
2.2.4 Reset	2 - 6
2.2.5 SMBus Devices	2 - 6
2.2.6 Thermal Management/System Monitoring	2 - 7
2.2.7 Serial EEPROM	2 - 7
2.2.8 FLASH Memory	2 - 7
2.2.8.1 BIOS FLASH (Firmware Hub)	2 - 7
2.2.8.2 CompactFlash Socket	2 - 7
2.3 Board Interfaces	2 - 9
2.3.1 General Purpose LED Output	2 - 9
2.3.2 USB Interfaces	2 - 10
2.3.3 Graphics Controller	2 - 10
2.3.3.1 Graphics Memory Usage	2 - 10
2.3.3.2 Graphics Resolution	2 - 10
2.3.3.3 VGA Analog Interface and Connector J6	2 - 11
2.3.4 Gigabit Ethernet	2 - 11
2.3.5 SATA Interface	2 - 13
2.3.5.1 Serial ATA Connector J4	2 - 13
2.3.6 CompactPCI Bus Interface	2 - 14
2.3.6.1 CompactPCI Connector Keying	2 - 14
2.3.6.2 CompactPCI Connectors J1 and J2 Pinouts	2 - 15
2.3.7 Optional Rear I/O Interface	2 - 17
2.3.7.1 Optional Rear I/O Interface on CompactPCI Connector J2	2 - 18
2.3.7.2 Rear I/O Configuration	2 - 19



3. Installation	3 - 3
3.1 Safety Requirements	3 - 3
3.2 CP305 Initial Installation Procedures	3 - 4
3.3 Standard Removal Procedures	3 - 5
3.4 Hot Swap Procedures	3 - 5
3.5 Installation of CP305 Peripheral Devices	3 - 5
3.5.1 CompactFlash Installation	3 - 5
3.5.2 USB Device Installation	3 - 6
3.5.3 Battery Replacement	3 - 6
3.5.4 Hard Disk Installation	3 - 7
3.6 Software Installation	3 - 7
4. Configuration	4 - 3
4.1 Clearing BIOS CMOS Setup	4 - 3
4.2 I/O Address Map	4 - 3
4.3 CP305-Specific Registers	4 - 4
4.3.1 Watchdog Timer Control Register	4 - 4
4.3.2 Hardware and Logic Revision Index Register	4 - 6
4.3.3 Reset Status Register	4 - 7
4.3.4 I/O Status Register	4 - 8
4.3.5 I/O Configuration Register	4 - 9
4.3.6 Board ID Register	4 - 10
4.3.7 Board Interrupt Configuration Register	4 - 11
4.3.8 BIOS Configuration Register	4 - 12
4.3.9 LED Control Register	4 - 13
4.3.10 Rear I/O GPIO Register	4 - 14
5. Power Considerations	5 - 3
5.1 System Power	5 - 3
5.1.1 CP305 Baseboard	5 - 3
5.1.2 Backplane	5 - 4
5.1.3 Power Supply Units	5 - 4
5.1.3.1 Start-Up Requirement	5 - 4
5.1.3.2 Power-Up Sequence	5 - 5



- 5.1.3.3 Tolerance5 - 5
- 5.1.3.4 Regulation5 - 6
- 5.2 Power Consumption5 - 6
- 5.3 Power Consumption of CP305 Accessories5 - 8
- 5.4 Start-Up Currents of the CP3055 - 8

6. Thermal Considerations 6 - 3

- 6.1 Board Internal Thermal Regulation6 - 3
 - 6.1.1 CPU Internal Thermal Supervision6 - 3
 - 6.1.2 CPU Emergency Thermal Supervision (Thermtrip)6 - 4
 - 6.1.3 Thermal Management Recommendations6 - 4
- 6.2 External Thermal Regulation6 - 4
 - 6.2.1 Convection Cooling6 - 5
 - 6.2.2 Forced Airflow6 - 5
 - 6.2.3 Peripherals6 - 7

A. CP305-HDD Module A - 3

- A.1 Overview A - 3
- A.2 Technical Specifications A - 4
- A.3 CP305-HDD Module Functional Block Diagram A - 5
- A.4 Front Panel of 8HP CP305 for CP305-HDD Module A - 6
- A.5 CP305-HDD Module Layout A - 7
- A.6 Module Interfaces (Front Panel and Onboard) A - 8
 - A.6.1 Keyboard/Mouse Interface A - 8
 - A.6.2 Universal Serial Port A - 9
 - A.6.3 USB Interfaces A - 10
 - A.6.4 DVI-D Interface A - 11
 - A.6.5 IDE Interface (PATA) A - 12
 - A.6.6 CompactFlash Socket A - 13
 - A.6.7 SATA Interface A - 15
 - A.6.8 PLCC Socket A - 16
 - A.6.9 Battery A - 16





B. CP305-TR Module	B - 3
B.1 Overview	B - 3
B.2 Technical Specifications	B - 4
B.3 CP305-TR Module Functional Block Diagram	B - 5
B.4 Front Panel of 8HP CP305 for CP305-TR Module	B - 6
B.5 CP305-TR Module Layout	B - 7
B.6 Module Interfaces (Front Panel and Onboard)	B - 8
B.6.1 USB Interfaces	B - 8
B.6.2 Ethernet Interfaces	B - 9
B.6.3 Serial Ports	B - 10
B.6.4 General Purpose Input/Output Port	B - 11
B.6.5 Serial ATA Interfaces SATA-A and SATA-B	B - 12
B.6.6 CompactFlash Socket	B - 12
B.6.7 CompactPCI Interface	B - 14
B.6.8 Battery	B - 16
B.6.9 Configuration of Jumper JP1	B - 16
C. CP-RIO3-04 Rear I/O Module	C - 3
C.1 Overview	C - 3
C.2 Technical Specifications	C - 4
C.3 Front Panels	C - 5
C.4 Module Layout: 4HP and 8HP Versions	C - 6
C.5 Module Interfaces	C - 7
C.5.1 USB Interfaces	C - 7
C.5.2 VGA Interface	C - 8
C.5.3 Gigabit Ethernet Interface	C - 9
C.5.4 COM Interface	C - 10
C.5.5 Peripheral Control Interface	C - 11
C.5.6 Serial ATA Interfaces SATA-A and SATA-B	C - 12
C.5.7 Rear I/O interface on Compact PCI Connector rJ2	C - 13



This page has been intentionally left blank.





List of Tables

1-1	<i>System Relevant Information</i>	1 - 5
1-2	<i>CP305 4HP Version Main Specifications</i>	1 - 9
1-3	<i>Standards</i>	1 - 14
1-4	<i>Additional Standards for Boards with Ruggedized Service</i>	1 - 15
1-5	<i>Add. Stand. for Boards with Ruggedized Service and Conformal Coating</i>	1 - 15
1-6	<i>Related Publications</i>	1 - 16
2-1	<i>Processors Supported on the CP305</i>	2 - 3
2-2	<i>Supported Memory Configurations</i>	2 - 4
2-3	<i>SMBus Device Addresses</i>	2 - 6
2-4	<i>EEPROM Address Map</i>	2 - 7
2-5	<i>CompactFlash Connector Pinout</i>	2 - 8
2-6	<i>POST Code Indication</i>	2 - 9
2-7	<i>USB Connectors J9 and J10 Pinout</i>	2 - 10
2-8	<i>D-Sub VGA Connector J6 Pinout</i>	2 - 11
2-9	<i>Pinout of the Dual GbE Con. J11A/B</i>	2 - 12
2-10	<i>SATA Port Mapping</i>	2 - 13
2-11	<i>SATA Connector J4 Pinout</i>	2 - 13
2-12	<i>CompactPCI Bus Connector J1 Pinout</i>	2 - 15
2-13	<i>64-bit CompactPCI Bus Connector J2 Pinout (CP305 Front I/O Vers.)...</i>	2 - 16
2-14	<i>Rear I/O CompactPCI Bus Connector J2 Pinout (CP305 Rear I/O Vers.)</i>	2 - 18
2-15	<i>GPIO Signal Description</i>	2 - 19
4-1	<i>Clearing BIOS CMOS Setup</i>	4 - 3
4-2	<i>I/O Address Map</i>	4 - 3
4-3	<i>Watchdog Timer Control Register</i>	4 - 5
4-4	<i>Hardware and Logic Revision Index Register</i>	4 - 6
4-5	<i>Reset Status Register</i>	4 - 7
4-6	<i>I/O Status Register</i>	4 - 8
4-7	<i>I/O Configuration Register</i>	4 - 9
4-8	<i>Board ID Register</i>	4 - 10
4-9	<i>Board Interrupt Configuration Register</i>	4 - 11
4-10	<i>BIOS Configuration Register</i>	4 - 12
4-11	<i>LED Control Register</i>	4 - 13



4-12	<i>Rear I/O GPIO Register</i>	4 - 14
5-1	<i>Maximum Input Power Voltage Limits</i>	5 - 3
5-2	<i>DC Operational Input Voltage Ranges</i>	5 - 3
5-3	<i>Input Voltage Characteristics</i>	5 - 5
5-4	<i>Power Consumption: CP305 with DOS</i>	5 - 7
5-5	<i>Power Consumption: CP305 with Linux / Win.® XP in IDLE Mode</i>	5 - 7
5-6	<i>Power Consumption: CP305 TDP at 75%</i>	5 - 7
5-7	<i>Power Consumption: CP305 TDP at 100%</i>	5 - 7
5-8	<i>Power Consumption: CP305 Graphics Benchmarks</i>	5 - 7
5-9	<i>Power Consumption of CP305 Accessories</i>	5 - 8
5-10	<i>Start-Up Currents of the CP305</i>	5 - 8
A-1	<i>CP305-HDD Module Main Specifications</i>	A - 4
A-2	<i>Serial Port Connector J9 Pinout</i>	A - 9
A-3	<i>USB Connectors J4 and J6 Pinout</i>	A - 10
A-4	<i>DVI-D Connector J2 Pinout</i>	A - 11
A-5	<i>Pinout of IDE Connector J3</i>	A - 12
A-6	<i>CompactFlash Connector J13 Pinout</i>	A - 14
A-7	<i>SATA Connector J5 Pinout</i>	A - 15
B-1	<i>CP305-TR Module Main Specifications</i>	B - 4
B-2	<i>USB Connectors J6 and J7 Pinout</i>	B - 8
B-3	<i>Fast Ethernet Connectors J11 and J12 Pinout</i>	B - 9
B-4	<i>Serial Port Connectors J4 (COM1) and J1 (COM2) Pinout</i>	B - 10
B-5	<i>GPIO Connector J5 Pinout</i>	B - 11
B-6	<i>SATA Connectors J8 and J10 Pinout</i>	B - 12
B-7	<i>CompactFlash Connector J9 Pinout</i>	B - 13
B-8	<i>CompactPCI Connector J2 Pinout</i>	B - 15
B-9	<i>Configuration of Jumper JP1</i>	B - 16
C-1	<i>CP-RIO3-04 Rear I/O Module Main Specifications</i>	C - 4
C-2	<i>USB Connectors J11 and J12 Pinout</i>	C - 7
C-3	<i>D-Sub VGA Connector J7 Pinout</i>	C - 8
C-4	<i>Pinout of the Dual GbE Con. J10A/B</i>	C - 9
C-5	<i>COM Connectors J2a (COM1) and J3a (COM2) Pinout</i>	C - 10
C-6	<i>Serial Port Connectors J2 (COM1) and J3 (COM2) Pinout</i>	C - 10
C-7	<i>Peripheral Connector J13 Pinout</i>	C - 11





C-8	<i>SATA Connectors J5 and J6 Pinout</i>	C - 12
C-9	<i>Rear I/O CompactPCI Connector rJ2 Pinout</i>	C - 14



This page has been intentionally left blank.





List of Figures

1-1	<i>CP305 Functional Block Diagram</i>	1 - 6
1-2	<i>CP305 4HP Front Panel</i>	1 - 7
1-3	<i>4 HP CP305 Board Layout (Top View)</i>	1 - 8
1-4	<i>4 HP CP305 Board Layout (Bottom View)</i>	1 - 8
2-1	<i>CompactFlash Socket</i>	2 - 8
2-2	<i>USB Connectors J9 and J10</i>	2 - 10
2-3	<i>D-Sub VGA Con. J6</i>	2 - 11
2-4	<i>Dual Gigabit Ethernet Connector J11A/B</i>	2 - 12
2-5	<i>SATA Connector J4</i>	2 - 13
2-6	<i>CPCI Connectors J1/J2</i>	2 - 14
6-1	<i>Operational Limits for the CP305 Operated in Extended Temp. Range ...</i>	6 - 6
A-1	<i>CP305-HDD Module Functional Block Diagram</i>	A - 5
A-2	<i>Front Panel of 8HP CP305 with CP305-HDD Module</i>	A - 6
A-3	<i>CP305-HDD Module Layout (Top View)</i>	A - 7
A-4	<i>CP305-HDD Module Layout (Bottom View)</i>	A - 7
A-5	<i>Keyboard/Mouse Connector</i>	A - 8
A-6	<i>Adapter for Connecting Mouse/Keyboard via PS/2</i>	A - 8
A-7	<i>Keyboard Connector J7 Pinout</i>	A - 9
A-8	<i>Serial Port Connector J9</i>	A - 9
A-9	<i>USB Connectors J4 and J6</i>	A - 10
A-10	<i>DVI-D Connector J2</i>	A - 11
A-11	<i>SATA Connector J5</i>	A - 15
B-1	<i>CP305-TR Module Functional Block Diagram</i>	B - 5
B-2	<i>Front Panel of 8HP CP305 with CP305-TR Module</i>	B - 6
B-3	<i>CP305-TR Module Layout (Top View)</i>	B - 7
B-4	<i>USB Connectors J6 and J7</i>	B - 8
B-5	<i>Fast Ethernet Connectors J11 and J12</i>	B - 9
B-6	<i>Serial Port Connectors J4 (COM1) and J1 (COM2)</i>	B - 10
B-7	<i>GPIO Connector J5</i>	B - 11
B-8	<i>SATA Connectors J8 and J10</i>	B - 12
B-9	<i>CompactPCI Connector J2</i>	B - 14
C-1	<i>CP-RIO3-04 Front Panels, 4HP and 8HP Versions</i>	C - 5
C-2	<i>CP-RIO3-04 Module Layout, 4HP Version</i>	C - 6



C-3	<i>CP-RIO3-04 Module Layout, 8HP Version</i>	C - 6
C-4	<i>USB Connectors J11/J12</i>	C - 7
C-5	<i>D-Sub VGA Connector J7</i>	C - 8
C-6	<i>Dual Gigabit Ethernet Connector J10A/B</i>	C - 9
C-7	<i>COM Connectors J2a (COM1) and J3a (COM2)</i>	C - 10
C-8	<i>Serial Port Connectors J2 (COM1) and J3 (COM2)</i>	C - 10
C-9	<i>Peripheral Connector J13</i>	C - 11
C-10	<i>SATA Connectors J5 and J6</i>	C - 12
C-11	<i>Rear I/O CompactPCI Connector rJ2</i>	C - 13



Proprietary Note

This document contains information proprietary to Kontron. It may not be copied or transmitted by any means, disclosed to others, or stored in any retrieval system or media without the prior written consent of Kontron or one of its authorized agents.

The information contained in this document is, to the best of our knowledge, entirely correct. However, Kontron cannot accept liability for any inaccuracies or the consequences thereof, or for any liability arising from the use or application of any circuit, product, or example shown in this document.

Kontron reserves the right to change, modify, or improve this document or the product described herein, as seen fit by Kontron without further notice.

Trademarks

This document may include names, company logos and trademarks, which are registered trademarks and, therefore, proprietary to their respective owners.

Environmental Protection Statement

This product has been manufactured to satisfy environmental protection requirements where possible. Many of the components used (structural parts, printed circuit boards, connectors, batteries, etc.) are capable of being recycled.

Final disposition of this product after its service life must be accomplished in accordance with applicable country, state, or local laws or regulations.



Explanation of Symbols



Caution, Electric Shock!

This symbol and title warn of hazards due to electrical shocks (> 60V) when touching products or parts of them. Failure to observe the precautions indicated and/or prescribed by the law may endanger your life/health and/or result in damage to your material.

Please refer also to the section “High Voltage Safety Instructions” on the following page.



Warning, ESD Sensitive Device!

This symbol and title inform that electronic boards and their components are sensitive to static electricity. Therefore, care must be taken during all handling operations and inspections of this product, in order to ensure product integrity at all times.

Please read also the section “Special Handling and Unpacking Instructions” on the following page.



Warning!

This symbol and title emphasize points which, if not fully understood and taken into consideration by the reader, may endanger your health and/or result in damage to your material.



Note ...

This symbol and title emphasize aspects the reader should read through carefully for his or her own advantage.



For Your Safety

Your new Kontron product was developed and tested carefully to provide all features necessary to ensure its compliance with electrical safety requirements. It was also designed for a long fault-free life. However, the life expectancy of your product can be drastically reduced by improper treatment during unpacking and installation. Therefore, in the interest of your own safety and of the correct operation of your new Kontron product, you are requested to conform with the following guidelines.

High Voltage Safety Instructions



Warning!

All operations on this device must be carried out by sufficiently skilled personnel only.



Caution, Electric Shock!

Before installing a not hot-swappable Kontron product into a system always ensure that your mains power is switched off. This applies also to the installation of piggybacks.

Serious electrical shock hazards can exist during all installation, repair and maintenance operations with this product. Therefore, always unplug the power cable and any other cables which provide external voltages before performing work.

Special Handling and Unpacking Instructions



ESD Sensitive Device!

Electronic boards and their components are sensitive to static electricity. Therefore, care must be taken during all handling operations and inspections of this product, in order to ensure product integrity at all times.

Do not handle this product out of its protective enclosure while it is not used for operational purposes unless it is otherwise protected.

Whenever possible, unpack or pack this product only at EOS/ESD safe work stations. Where a safe work station is not guaranteed, it is important for the user to be electrically discharged before touching the product with his/her hands or tools. This is most easily done by touching a metal part of your system housing.

It is particularly important to observe standard anti-static precautions when changing piggybacks, ROM devices, jumper settings etc. If the product contains batteries for RTC or memory backup, ensure that the board is not placed on conductive surfaces, including anti-static plastics or sponges. They can cause short circuits and damage the batteries or conductive circuits on the board.



General Instructions on Usage

In order to maintain Kontron's product warranty, this product must not be altered or modified in any way. Changes or modifications to the device, which are not explicitly approved by Kontron and described in this manual or received from Kontron's Technical Support as a special handling instruction, will void your warranty.

This device should only be installed in or connected to systems that fulfill all necessary technical and specific environmental requirements. This applies also to the operational temperature range of the specific board version, which must not be exceeded. If batteries are present, their temperature restrictions must be taken into account.

In performing all necessary installation and application operations, please follow only the instructions supplied by the present manual.

Keep all the original packaging material for future storage or warranty shipments. If it is necessary to store or ship the board, please re-pack it as nearly as possible in the manner in which it was delivered.

Special care is necessary when handling or unpacking the product. Please consult the special handling and unpacking instruction on the previous page of this manual.



Two Year Warranty

Kontron grants the original purchaser of Kontron's products a ***TWO YEAR LIMITED HARDWARE WARRANTY*** as described in the following. However, no other warranties that may be granted or implied by anyone on behalf of Kontron are valid unless the consumer has the express written consent of Kontron.

Kontron warrants their own products, excluding software, to be free from manufacturing and material defects for a period of 24 consecutive months from the date of purchase. This warranty is not transferable nor extendible to cover any other users or long-term storage of the product. It does not cover products which have been modified, altered or repaired by any other party than Kontron or their authorized agents. Furthermore, any product which has been, or is suspected of being damaged as a result of negligence, improper use, incorrect handling, servicing or maintenance, or which has been damaged as a result of excessive current/voltage or temperature, or which has had its serial number(s), any other markings or parts thereof altered, defaced or removed will also be excluded from this warranty.

If the customer's eligibility for warranty has not been voided, in the event of any claim, he may return the product at the earliest possible convenience to the original place of purchase, together with a copy of the original document of purchase, a full description of the application the product is used on and a description of the defect. Pack the product in such a way as to ensure safe transportation (see our safety instructions).

Kontron provides for repair or replacement of any part, assembly or sub-assembly at their own discretion, or to refund the original cost of purchase, if appropriate. In the event of repair, refunding or replacement of any part, the ownership of the removed or replaced parts reverts to Kontron, and the remaining part of the original guarantee, or any new guarantee to cover the repaired or replaced items, will be transferred to cover the new or repaired items. Any extensions to the original guarantee are considered gestures of goodwill, and will be defined in the "Repair Report" issued by Kontron with the repaired or replaced item.

Kontron will not accept liability for any further claims resulting directly or indirectly from any warranty claim, other than the above specified repair, replacement or refunding. In particular, all claims for damage to any system or process in which the product was employed, or any loss incurred as a result of the product not functioning at any given time, are excluded. The extent of Kontron liability to the customer shall not exceed the original purchase price of the item for which the claim exists.

Kontron issues no warranty or representation, either explicit or implicit, with respect to its products' reliability, fitness, quality, marketability or ability to fulfil any particular application or purpose. As a result, the products are sold "as is," and the responsibility to ensure their suitability for any given task remains that of the purchaser. In no event will Kontron be liable for direct, indirect or consequential damages resulting from the use of our hardware or software products, or documentation, even if Kontron were advised of the possibility of such claims prior to the purchase of the product or during any period since the date of its purchase.

Please remember that no Kontron employee, dealer or agent is authorized to make any modification or addition to the above specified terms, either verbally or in any other form, written or electronically transmitted, without the company's consent.



This page has been intentionally left blank.





Chapter

1

Introduction



This page has been intentionally left blank.





1. Introduction

1.1 Board Overview

The CP305 is a highly integrated, 3U, 4 HP or 8 HP, lead-free CompactPCI system controller board. It has been designed to support the Intel® Atom™ Processor N270 with 1.6 GHz frequency and 533 MHz Front Side Bus (FSB) in 437 µFCBGA8 packaging.

The CP305 utilizes the Mobile Intel® 945GSE Express Graphics Memory Controller Hub (945GSE Express GMCH) and the ICH7-M I/O Controller Hub.

The board includes up to 2 GB of soldered Double Data Rate 2 (DDR2) memory operating at 533 MHz.

The 4HP CP305 comes with an onboard SATA port, two Gigabit Ethernet ports (Intel® 82574L), two USB 2.0 ports on the front panel, and a built-in Intel 3D Graphics accelerator for enhanced graphics performance with a VGA analog display interface. A CompactFlash socket for type I and type II CompactFlash cards is provided via the CP305-CF piggy-back module of the CP305. Several onboard connectors provide flexible 8HP expandability.

The board supports one 32-bit/33 MHz CompactPCI interface acting as system master CPU only.

The optional CP305-HDD module has been designed to make various legacy PC I/O ports available as well as DVI and USB interfacing. It includes one COM port, a PS/2 keyboard and mouse port, a 2.5" onboard hard disk SATA interface, a PATA IDE connector (i.e. for a CD/DVD drive), two USB 2.0 ports, and a DVI-D interface.

Designed for stability and packaged in a rugged format, the board fits into all applications situated in industrial environments, including I/O intensive applications where only one slot is available for the CPU, making it a perfect core technology for long-life applications. Components which have high temperature tolerance have been selected from embedded technology programs, and therefore offer long-term availability.

There are various operating systems available for the CP305. For detailed information, please contact Kontron.



1.2 Board-Specific Information

The CP305 is a CompactPCI single-board computer based on Intel's Atom™ Processor technology and is specifically designed for use in highly integrated platforms with solid mechanical interfacing for a wide range of industrial environment applications.

Some of the CP305's outstanding features are:

- Intel® Atom™ Processor N270:
 - 1.6 GHz core frequency
 - 533 MHz FSB
 - 437-pin µFCBGA8 package
 - 56 kB L1 and 512 kB L2 cache on-die, running at CPU speed
- 945GSE and 82801GM (ICH7-M) chipset
- Up to 2 GB DDR2 SDRAM memory running at 533 MHz
- Integrated 3D high-performance VGA controller
- Analog display support of up to 2048 x 1536 pixels at 75 Hz
- DVI-D option (with 8HP version)
- Two Gigabit Ethernet interfaces (82574L)
- Two Serial ATA (SATA) interfaces switchable to rear I/O
- One IDE Ultra ATA/100 interface
- Onboard Compact Flash socket for type I and type II CompactFlash cards (True IDE with DMA) on CP305-CF module for 4HP version and CP305-HDD module for 8HP version
- Six USB ports
 - Two Front USB 2.0
 - Two further Front USB 2.0 on the 8HP version
 - Two Rear I/O USB 2.0
- Compatible with CompactPCI Specification PICMG 2.0. Rev. 3.0
- 1 MB onboard FWH for BIOS
- Hardware Monitor (Super I/O SCH3112)
- Watchdog timer
- Real-time clock
- Two COM ports on Rear I/O (with an optional single port on the front I/O on 8HP version)
- I/O extension connectors (SATA, SDVO, USB, PS/2, LPC, IDE, COM, as well as Monitor and Control signals)
- 4HP or 8HP, 3U CompactPCI
- Reset push button switch (with 8HP version)
- Several Rear I/O configurations
- Jumperless board configuration
- Power-up sequencing and in-rush current optimized design
- Passive heat sink solution
- AMI BIOS



1.3 Optional Modules

1.3.1 CP305-HDD Module

The CP305-HDD module for the 8 HP CP305 version provides legacy PC I/O ports. It includes one digital DVI port, two USB 2.0 ports, one COM port, a PS/2 keyboard and mouse port, one IDE connector, and one CompactFlash socket. A SATA hard disk interface is also available for mounting a 2.5" hard disk drive.

For further information concerning the CP305-HDD module, refer to Appendix A.

1.3.2 CP305-TR Module

The Kontron CP305-TR module for the 8 HP CP305 version has been designed for use in mobile- and transportation-oriented applications where robust, mechanically secured connections are required. It includes two Fast Ethernet ports via M12, D-coded connectors, two USB 2.0 service ports via M8, A-coded connectors and three GPO LEDs on the front panel as well as two onboard COM ports, one onboard GPIO port, one CompactFlash socket, two onboard SATA ports for connection to external SATA devices and one CompactPCI connector for connecting the CP305-TR to the backplane.

For further information concerning the CP305-TR module, refer to Appendix B

1.3.3 CP-RIO3-04 Rear I/O Module

The CP-RIO3-04 rear I/O module has been designed for use with the CP305 board from Kontron and provides comprehensive rear I/O functionality.

For further information concerning the CP-RIO3-04 rear I/O module, refer to Appendix C.

1.4 System Relevant Information

The following system relevant information is general in nature but should still be considered when developing applications using the CP305.

Table 1-1: System Relevant Information


SUBJECT	INFORMATION
System Configuration	The CP305 system controller board can support up to 7 peripheral boards with 32-bit and 33 MHz.
Master/Slave Functionality	The CP305 can operate only as a master board.
Board Location in the System	The CP305 board must be installed in a system slot of a CompactPCI backplane.
Hot Swap Compatibility	The CP305 supports the addition or removal of other boards whilst in a powered-up state. Individual clocks for each slot and ENUM signal handling are in compliance with the PICMG 2.1 Hot Swap specification.
Hardware Requirements	The CP305 can be installed in any CompactPCI 3U rack.
Operating Systems	There are various operating systems available for the CP305. For detailed information, please contact Kontron.

1.5 Board Diagrams

The following diagrams provide additional information concerning board functionality and component layout.

1.5.1 Functional Block Diagram


Figure 1-1: CP305 Functional Block Diagram

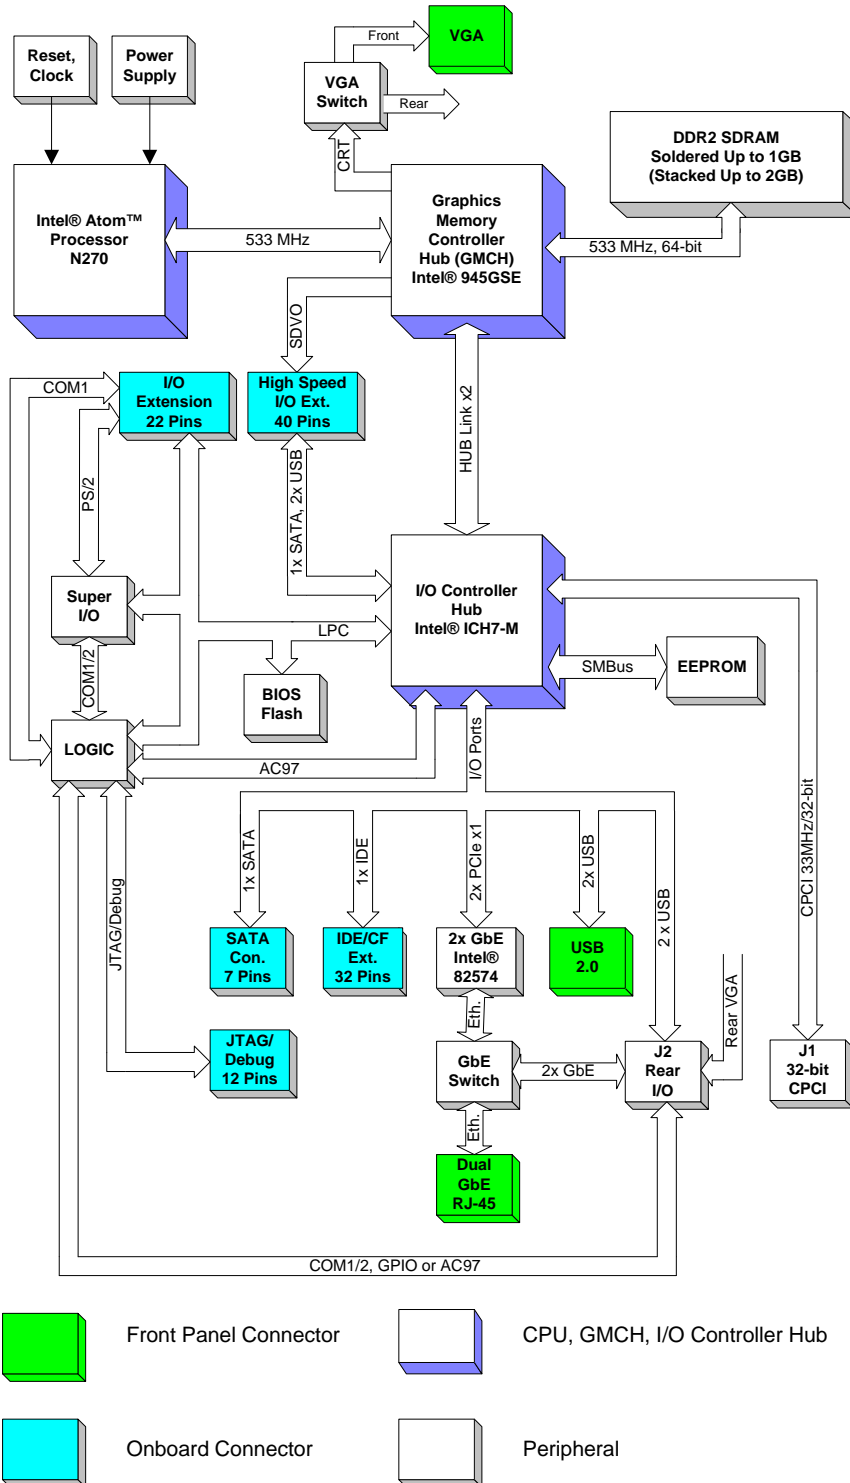



1.5.2 Front Panel

Figure 1-2: CP305 4HP Front Panel

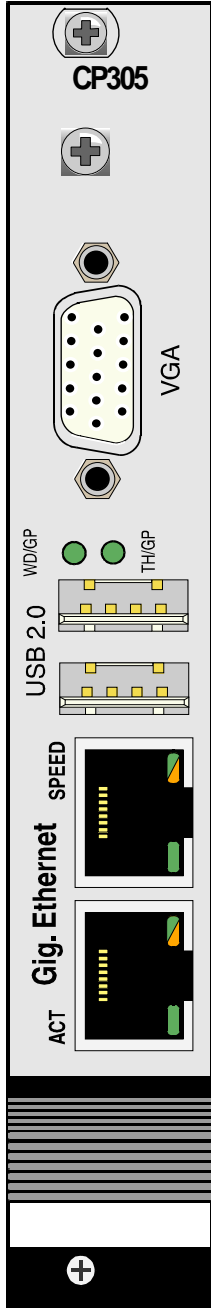

LEGEND:

CP305: 4HP version

General Purpose LEDs:

WD/GP (green): Watchdog or General Purpose; when lit during power-on, it indicates a PCI reset is active.

TH/GP (green): Overtemperature Status or General Purpose; when lit during power-on, it indicates a power failure.



Note ...

If the WD/GP LED and the TH/GP LED keep flashing during BIOS initialization, a POST code is indicated.

For further information on the blinking intervals of the WD/GP LED and the TH/GP LED refer to section 2.3.1 General Purpose LED Output.

Integral Ethernet LEDs

ACT (green): Ethernet Link/Activity

SPEED (green/orange): Ethernet Speed

SPEED ON (orange): 1000 Mbit

SPEED ON (green): 100 Mbit

SPEED OFF: 10 Mbit



Note ...

For detailed information on the 8HP CP305 version, refer to Appendix A, CP305-HDD module.



1.5.3 Board Layout

Figure 1-3: 4 HP CP305 Board Layout (Top View)


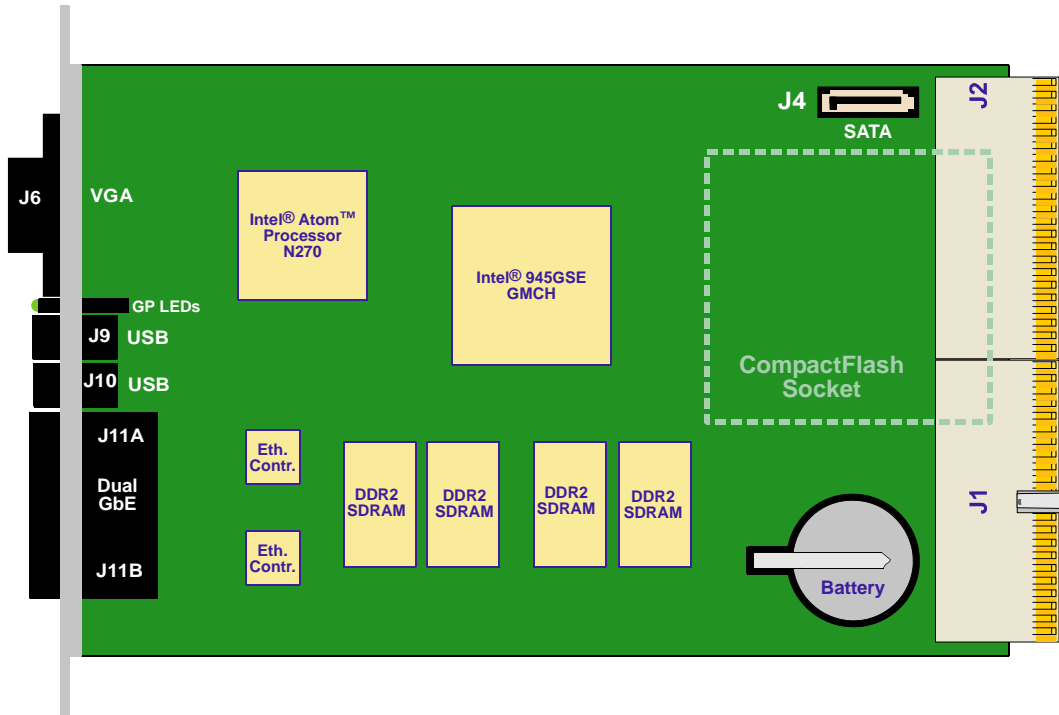


Figure 1-4: 4 HP CP305 Board Layout (Bottom View)

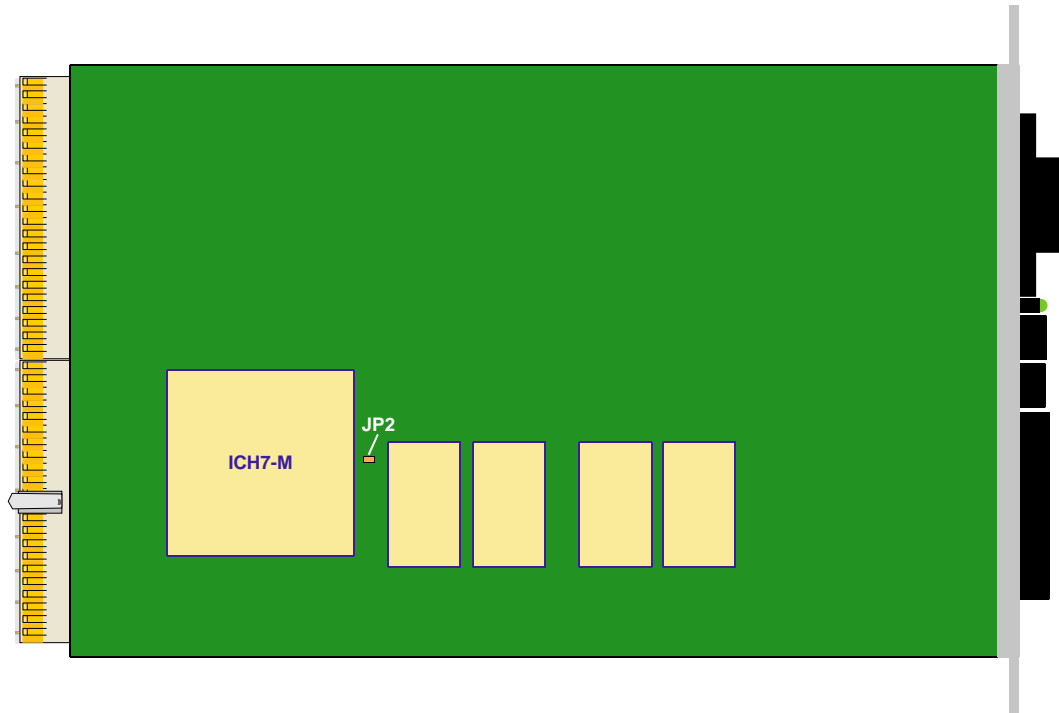

1.6 Technical Specification

Table 1-2: CP305 4HP Version Main Specifications

CP305		SPECIFICATIONS
Processor and Memory	CPU	<p>The CP305 supports the following microprocessor:</p> <ul style="list-style-type: none"> Intel® Atom™ Processor N270: <ul style="list-style-type: none"> 1.6 GHz core frequency 533 MHz FSB 437-pin µFCBGA8 package 56 kB L1 and 512 kB L2 cache on-die, running at CPU speed
	Memory	<p>Main Memory:</p> <ul style="list-style-type: none"> Up to 2 GB Single-Channel soldered DDR2 SDRAM memory 533 MHz memory bus Error Checking and Correction (ECC) not provided <p>Cache structure:</p> <ul style="list-style-type: none"> 56 kB L1 on-die full speed processor cache <ul style="list-style-type: none"> 32 kB for instruction cache 24 kB for data cache 512 kB L2 on-die full speed processor cache <p>FLASH Memory:</p> <ul style="list-style-type: none"> 1 MB FLASH for BIOS <p>Memory Extension:</p> <ul style="list-style-type: none"> CompactFlash socket for type I and type II CompactFlash cards (true IDE mode) <p>Serial EEPROM:</p> <ul style="list-style-type: none"> 24LC64 (64 kbit)
Chipset	Intel® 945GSE Express GMCH	<p>Mobile Intel® 945GSE Express Graphics Memory Controller Hub (945GSE Express GMCH):</p> <ul style="list-style-type: none"> Support for a single Intel® Atom™ Processor N270 64-bit AGTL/AGTL+ based System Bus interface with 533 MHz System Memory interface with optimized support for single-channel DDR2 SDRAM memory at 533 MHz without ECC Integrated 2D and 3D Graphics Engines Integrated 400 MHz RAMDAC
	Intel® ICH7-M	<p>82801GM I/O Controller Hub (ICH7-M)</p> <ul style="list-style-type: none"> PCI Rev. 2.3 compliant with support for 32-bit/33 MHz PCI operations Power management logic support Enhanced DMA controller, interrupt controller, and timer functions Integrated IDE controller Ultra ATA/100/66/33 and PIO mode USB 2.0 host interface with up to six USB ports available on the CP305 SATA Host Controller with two ports, 1.5 Gbit/s transfer rate Two of the four x1 PCI Express ports are used for Gigabit Ethernet System Management Bus (SMBus) compatible with most I²C™ devices Low Pin Count (LPC) interface Firmware Hub (FWH) interface support

Table 1-2: CP305 4HP Version Main Specifications (Continued)

CP305	SPECIFICATIONS
CompactPCI	Compliant with CompactPCI Specification PICMG® 2.0 R 3.0 <ul style="list-style-type: none"> • System master operation • 32-bit / 33 MHz master interface • 3.3 V or 5 V (universal PCI interface)
Rear I/O	The following interfaces are routed to the Rear I/O connector J2: <ul style="list-style-type: none"> • COM1 and COM2 (3.3V TTL signaling) • 2 x USB 2.0 • VGA (analog) • 2x Gigabit Ethernet • 2x SATA • System Management signals • General Purpose signals
Hot Swap	The CP305 is not hot-swappable but supports the addition and removal of other boards whilst in a powered-up state. Individual clocks for each slot and Enum signal handling are in compliance with the PICMG 2.1 Hot Swap Specification.
VGA	Built-in Intel 3D Graphics accelerator for enhanced graphics performance. <ul style="list-style-type: none"> • Supports resolutions of up to 2048 x 1536 at a 75 Hz refresh rate • Hardware motion compensation for software MPEG2 decoding • Dynamic Video Memory Technology (DVMT3.0)
Gigabit Ethernet	Two 10 Base-T/100 Base-TX/1000 Base-T Gigabit Ethernet interfaces based on the Intel® 82574L Ethernet PCI Express bus controller individually switchable to front or rear I/O <ul style="list-style-type: none"> • Dual RJ-45 connector on the front panel • Automatic mode recognition (Auto-Negotiation) • Automatic cabling configuration recognition (Auto MDI, MDI-X) Cabling requirement: Category 5, UTP, four-pair cabling
USB	Six USB ports supporting UHCI and EHCI: <ul style="list-style-type: none"> • Two USB 2.0 connectors on the front panel • Two USB 2.0 connectors on the front panel of the 8 HP version • Two USB 2.0 connectors on the rear I/O interface
Serial	Two UARTs, 16C550 compatible. <ul style="list-style-type: none"> • COM1 available either on the front panel of the 8 HP version or on the Rear I/O • COM2 available on Rear I/O only
Keyboard and Mouse	Keyboard and Mouse are supported <ul style="list-style-type: none"> • USB keyboard support on 4HP and 8HP • PS/2 only with CP305-HDD module (8HP)



Table 1-2: CP305 4HP Version Main Specifications (Continued)

CP305		SPECIFICATIONS
Interfaces	Mass Storage	<p>SATA: Integrated Serial ATA Host Controllers</p> <ul style="list-style-type: none"> Two switchable SATA ports, either: <ul style="list-style-type: none"> One onboard SATA port and one SATA port on the CP305-HDD module (8HP) for 2.5" HDD, or Two SATA ports available on Rear I/O Data transfer rate up to 1.5 Gbit/s <p>IDE Ultra ATA/100/66/33 and PIO</p> <ul style="list-style-type: none"> CompactFlash (either on 4 HP or on 8HP) 40-pin, 2.54 mm, male pinrow connector available on CP305-HDD module (8HP) <p>CompactFlash:</p> <ul style="list-style-type: none"> CompactFlash socket for type I and type II CompactFlash cards (DMA capable true IDE mode) The CompactFlash is always configured as IDE master Supports type I and II CompactFlash cards <p>40-pin Standard Connector (only with CP305-HDD module):</p> <ul style="list-style-type: none"> If a CompactFlash card is inserted, the drive must be configured as slave (CF is always IDE master).
	I/O extension interfaces	<p>I/O extension interfaces:</p> <ul style="list-style-type: none"> SATA 2x USB2.0 SDVO LPC devices PS/2 COM1 Monitor and Control signals
Sockets	Front Panel Connectors	<ul style="list-style-type: none"> VGA: 15-pin D-Sub connector USB: two 4-pin connectors Ethernet: two RJ-45 connectors
	Onboard Connectors	<ul style="list-style-type: none"> One 7-pin, L-form standard SATA connector I/O extension connectors CompactPCI Connector J1 and J2 CompactFlash socket for type I, II (on the CP305-CF module)

Table 1-2: CP305 4HP Version Main Specifications (Continued)

CP305		SPECIFICATIONS
HW Monitoring	LEDs	<p>System status:</p> <ul style="list-style-type: none"> • WD/GP: green: Watchdog or General Purpose; when remains lit during power-on, it indicates PCI reset is active. • TH/GP: green: Overtemperature Status or General Purpose; when remains lit during power-on, it indicates a power failure. <p>Gigabit Ethernet status:</p> <ul style="list-style-type: none"> • ACT: green: Network/Link Activity • SPEED: green/orange: Network Speed
	Watchdog	<p>Software-configurable Watchdog operating in the following modes:</p> <ul style="list-style-type: none"> • Timer-only mode • Reset mode • IRQ mode • Dual-stage mode
	Thermal Management	<p>CPU overtemperature protection is provided by:</p> <ul style="list-style-type: none"> • Internal processor temperature control unit • CPU shut down via thermal monitor • Specially designed heat sink
	System Monitor	<p>Hardware monitor integrated in the SCH3112 for the supervision of:</p> <ul style="list-style-type: none"> • Several system power voltages • One fan speed input • One fan PWM output • Board temperature
Software	Software BIOS	<p>AMI BIOS with 1 MB Flash memory with the following features:</p> <ul style="list-style-type: none"> • QuickBoot • QuietBoot • BootBlock • LAN boot capability for diskless systems (standard PXE) • Boot from USB floppy disk drive • BIOS legacy support for USB keyboards • Plug and Play capability • BIOS parameters are saved in the EEPROM • Board serial number is saved within the EEPROM • PC Health Monitoring
	Operating Systems	<p>There are various operating systems available for the CP305. For detailed information, please contact Kontron.</p>

Table 1-2: CP305 4HP Version Main Specifications (Continued)

CP305		SPECIFICATIONS
General	Mechanical	3U, 4HP, CompactPCI compliant form factor
	Power Consumption	typ. 10 W For further information, refer to Chapter 5.
	Temperature Range	Operational: 0°C to +60°C Standard -40°C to +80°C Extended (without hard disk and in the appropriate system environment) Storage: -55°C to +85°C Without hard disk and without battery -40°C to +65°C With hard disk and without battery  Note ... When a battery is installed, refer to the operational specifications of the battery as this determines the storage temperature of the CP305 (See "Battery" below).  Note ... When additional components are installed, refer to their operational specifications as this will influence the board's operational and storage temperature.
	Climatic Humidity	93% RH at 40°C, non-condensing (acc. to IEC 60068-2-78)
	Dimensions	100 mm x 160 mm
	Board Weight	320 grams (4HP variants with heat sink, with front panel but without mezzanine boards)
	Battery	3.0V lithium battery for RTC with battery socket. Recommended type: CR2025 Temperature ranges: Operational (load): -20°C to +70°C typical (refer to the battery manufacturer's specifications for exact range) Storage (no load): -55°C to +70°C typical (no discharge)



Note ...

For a description of the additional 8HP version interfaces, refer to the Technical Specifications table in Appendix A, CP305-HDD module.

1.7 Kontron Software Support

Kontron is one of the few CompactPCI and VME vendors providing inhouse support for most of the industry-proven real-time operating systems that are currently available. Due to its close relationship with the software manufacturers, Kontron is able to produce and support BSPs and drivers for the latest operating system revisions thereby taking advantage of the changes in technology.

1.8 Standards

This Kontron product complies with the requirements of the following standards.

Table 1-3: Standards

TYPE	ASPECT	STANDARD
CE	Emission	EN55022 EN61000-6-3
	Immission	EN55024 EN61000-6-2
	Electrical Safety	EN60950-1
Mechanical	Mechanical Dimensions	IEEE 1101.10
Environmental	Climatic Humidity	IEC60068-2-78 (see note below)
	WEEE	Directive 2002/96/EC Waste electrical and electronic equipment
	RoHS	Directive 2002/95/EC Restriction of the use of certain hazardous substances in electrical and electronic equipment



Note ...

Kontron performs comprehensive environmental testing of its products in accordance with applicable standards.

Users desiring to perform further environmental testing of Kontron products must contact Kontron for assistance prior to performing any such testing. This is necessary, as it is possible that environmental testing can be destructive when not performed in accordance with the applicable specifications.

In particular, for example, boards **without conformal coating** must not be exposed to a change of temperature exceeding 1K/minute, averaged over a period of not more than five minutes. Otherwise, condensation may cause permanent damage, especially when the board is powered up again.

Kontron does not accept any responsibility for damage to products resulting from destructive environmental testing.

In addition, boards providing ruggedized service comply with the following standards as well.

Table 1-4: Additional Standards for Boards with Ruggedized Service

TYPE	ASPECT	STANDARD	REMARKS
Environmental	Vibration (Sinusoidal)	IEC60068-2-6	Ruggedized version test parameters: <ul style="list-style-type: none"> • 10-300 (Hz) frequency range • 5 (g) acceleration • 1 (oct/min) sweep rate • 10 cycles/axis • 3 axis
	Single Shock	IEC60068-2-27	Ruggedized version test parameters: <ul style="list-style-type: none"> • 30 (g) acceleration • 9 (ms) shock duration half sine • 3 number of shocks per direction (total: 18) • 6 directions • 5 (s) recovery time
	Permanent Shock	IEC60068-2-29	Ruggedized version test parameters: <ul style="list-style-type: none"> • 15 (g) acceleration • 11 (ms) shock duration half sine • 500 number of shocks per direction • 6 directions • 5 (s) recovery time

Furthermore, boards providing ruggedized service and conformal coating comply with the following standards as well.

Table 1-5: Add. Standards for Boards with Ruggedized Service and Conformal Coating

TYPE	ASPECT	STANDARD	REMARKS
Railway	Electromagnetic Compatibility (EMC)	EN50155	--
		EN50121-3-2	--
	Temperature	EN50155	Class T2
	Shock and Vibration	EN50155	--
		EN60373	Class 1B
	Climatic Humidity	EN50155	--



1.9 Related Publications

The following publications contain information relating to this product.

Table 1-6: Related Publications

PRODUCT	PUBLICATION
CompactPCI Systems and Boards	CompactPCI Specification PICMG 2.0, Rev. 3.0 CompactPCI Hot Swap Specification PICMG 2.1 Rev. 2.0
	Kontron's CompactPCI System Manual, ID 19954
CompactFlash Cards	CF+ and CompactFlash Specification Revision 2.0
Serial ATA	Serial ATA 1.0a Specification




Chapter **2**

Functional Description



This page has been intentionally left blank.





2. Functional Description

2.1 CPU, Memory and Chipset

2.1.1 CPU

The CP305 supports the Intel® Atom™ Processor N270 with 1.6 GHz frequency and 533 MHz Front Side Bus (FSB) in 437 µFCBGA8 packaging.

The Intel® Atom™ Processor N270 has one core support for two parallel threads (Hyper-Threading) and provides 512 kB L2 cache. This processor delivers high performance with low power consumption and minimal cooling requirements.

The Intel® Atom™ Processor N270 supports the Intel® SpeedStep® technology which enables real-time dynamic switching of the voltage and frequency between several modes. This is achieved by switching the bus ratios, core operating voltage, and core processor speeds without resetting the system. The frequency for the processor may also be selected in the BIOS or via the operating system.

The following list sets out some of the key features of the Intel® Atom™ Processor N270:

- 1.6 GHz processor speed
- Two execution threads in one single core
- Optimized power-efficient computing
- 56 kB L1 cache (32 kB instruction cache and 24 kB write-back data cache)
- 512 kB L2 cache
- Streaming SIMD Extensions 3 (SSE3) and Supplemental Streaming SIMD Extensions 3 (SSSE3)
- 533 MHz, Source-Synchronous Front Side Bus (FSB)
- Advanced Power Management features including Enhanced Intel® SpeedStep® technology
- Execute Disable Bit support for enhanced security

The following tables provide information about the Intel® Atom™ Processor N270:

Table 2-1: Processors Supported on the CP305

SPEED	INTEL® ATOM™ PROCESSOR N270
PACKAGE	µFCBGA8
L2 CACHE	512 kB
FSB	533 MHz
HFM ¹⁾	1.6 GHz
LFM ²⁾	0.8 GHz

¹⁾HFM: Highest Frequency Mode

²⁾LFM: Lowest Frequency Mode



2.1.2 Memory

The CP305 supports a single-channel DDR2 memory without Error Checking and Correcting (ECC) running at 533 MHz. The maximum memory size is 2 GB. The available memory configuration can be either 1 GB or 2 GB. However, due to internal memory allocations, the amount of memory available to applications is less than the total physical memory in the system. For example, the chipset’s Dynamic Video Memory Technology (DVMT 3.0) dynamically allocates the proper amount of system memory required by the operating system and the application.

Table 2-2: Supported Memory Configurations

MEMORY	TOTAL PHYSICAL MEMORY	TOTAL MEMORY AVAILABLE TO APPLICATIONS
1 GB	1 GB	1 GB minus the allocated memory for DVMT
2 GB	2 GB	2 GB minus the allocated memory for DVMT

2.1.3 Intel® 945GSE Express Chipset Overview

The Intel® 945GSE Express Chipset consists of the following devices:

- Mobile Intel® 945GSE Express Graphics Memory Controller Hub (945GSE Express GMCH)
- I/O Controller Hub 7 (ICH7-M)

The 945GSE Express GMCH provides the processor interface for the Intel® Atom™ Processor N270 and the DDR2 interface, and includes a high performance graphics accelerator. The ICH7-M is a centralized controller for the boards’ I/O peripherals, such as the PCI, PCI Express, USB 2.0, SATA, IDE and LPC ports.

2.1.4 Mobile Intel® 945GSE Express Graphics Memory Controller Hub

The Mobile Intel® 945GSE Express Graphics Memory Controller Hub (945GSE Express GMCH) is a highly integrated hub that provides the CPU interface (optimized for the Intel® Atom™ Processor N270), and the DDR2 SDRAM system memory interface operating at 533 MHz, a hub link interface to the ICH7-M and high performance internal graphics.

Graphics and Memory Controller Hub Feature Set

Host Interface

The 945GSE Express GMCH is optimized for the Intel® Atom™ Processor N270. The chipset supports a Front Side Bus (FSB) frequency of 533 MHz using 1.05 V AGTL signaling. The AGTL bus supports 32-bit host addressing for decoding up to 4 GB memory address space.

System Memory Interface

The 945GSE Express GMCH integrates a DDR2 SDRAM controller with 64-bit wide interfaces without ECC bits. The chipset supports DDR2-533 for system memory.

945GSE Express GMCH

The 945GSE Express GMCH includes a highly integrated graphics accelerator delivering high performance 3D and 2D graphic capabilities. The internal graphics controller provides an interface for a standard VGA analog display.





2.1.5 I/O Controller Hub ICH7-M

The ICH7-M (82801GM) is a highly integrated multifunctional I/O Controller Hub that provides the interface to the PCI Bus and integrates many of the functions needed in today's PC platforms, for example, PCI Express, Ultra DMA 100/66/33 IDE controller, SATA controller, USB host controller supporting USB 2.0, LPC interface, and a FWH Flash BIOS interface controller. The ICH7-M communicates with the host controller over a dedicated hub interface.

I/O Controller Hub Feature set comprises:

- PCI 2.3 interface with eight PCI IRQ inputs
- Bus master IDE controller UltraDMA 100/66/33 or PIO mode
- Five USB controllers with up to eight USB 1.1 or USB 2.0 ports (max. of 6 ports available)
- Hub interface for the 945GSE Express Chipset
- SATA controller
- FWH interface
- LPC interface
- RTC controller

2.2 Peripherals

The following standard peripherals are available on the CP305 board:

2.2.1 Timer

The CP305 is equipped with the following timers:

- Real-Time Clock
The ICH7-M contains a MC146818A-compatible real-time clock with 256 bytes of battery-backed RAM.
The real-time clock performs timekeeping functions and includes 256 bytes of general purpose battery-backed CMOS RAM. Features include an alarm function, programmable periodic interrupt and a 100-year calendar. All battery-backed CMOS RAM data remains stored in an additional EEPROM. This prevents data loss in case the CP305 is operated without battery.
- Counter/Timer
Three 8254-style counter/timers are included on the CP305 as defined for the PC/AT.
- In addition to the three 8254-style counters, the ICH7-M includes three individual multi-media event timers that may be used by the operating system. They are implemented as a single counter each with its own comparator and value register.

2.2.2 Watchdog Timer

A user-configurable Watchdog Timer with four different modes of operation is available on the CP305. For further information, refer to Chapter 4.3.1, Watchdog Timer Control Register.



2.2.3 Battery

The CP305 is provided with a 3.0 V “coin cell” lithium battery for the RTC. For further information concerning the battery and its replacement, refer to Chapter 3.5.3, Battery Replacement.



Note ...

If a CP305-HDD module is used on the CP305, either the CP305 or the CP305-HDD module may be equipped with a battery.

Using one battery on the CP305 and one on the CP305-HDD module simultaneously may result in premature discharge of the batteries.



Note ...

The user must be aware that the battery’s operational temperature range is less than the CP305’s storage temperature range (see Table 1-2).

For exact range information, refer to the battery manufacturer’s specifications.

2.2.4 Reset

The CP305 is automatically reset by a precision voltage monitoring circuit that detects a drop in voltage below the acceptable operating limit of 4.45 V for the 5 V line and below 2.8 V for the 3.3 V line. Other reset sources include the watchdog timer and the local push-button switch (only on 8HP). The CP305 responds to any of these sources by initializing local peripherals.

A reset will be generated by the following conditions:

- +5 V supply falls below 4.45 V (typ.)
- +3.3 V supply falls below 2.8 V (typ.)
- Pushbutton "RESET" pressed (only on 8HP)
- Watchdog overflow
- CompactPCI backplane PRST# input (CompactPCI connector J2, pin C17)



Note ...

The ICH7-M provides an enhanced reset control logic. The reset pulse width is typical 5 ms (min. 1 ms) regardless of how long the RESET pushbutton is being pressed or the PRST signal remains active.

2.2.5 SMBus Devices

The CP305 provides a System Management Bus (SMBus) for access to several system monitoring and configuration functions. The SMBus consists of a two-wire I²C bus interface. The following table describes the function and address of every onboard SMBus device.

Table 2-3: SMBus Device Addresses

DEVICE	SMBUS ADDRESS
EEPROM 24LC64	1010111xb
Clock	1101001xb
SPD (soldered DDR2)	1010000xb





2.2.6 Thermal Management/System Monitoring

The Super I/O SCH3112 can be used to monitor several critical hardware parameters of the system, including power supply voltages, fan speeds and temperatures, all of which are very important for the proper operation and stability of a high-end computer system. The SCH3112 provides an LPC bus interface.

The voltages +12 V, +5 V, +3.3 V, +2.5 V, and Vcore are supervised. One fan tachometer output can be measured using the SCH3112's FAN1 input. One pulse width modulation (PWM1) output can be used for FAN speed control.

The temperature sensors on the SCH3112 monitor the CPU temperature and the ambient temperature around the SCH3112 to ensure that the system is operating at a safe temperature level.

2.2.7 Serial EEPROM

This EEPROM is connected to the SMBus/I²C bus provided by the ICH7-M.

Table 2-4: EEPROM Address Map

ADDRESS	FUNCTION
0x000 - 0x0FF	CMOS backup
0x100 - 0x1FF	Production data
0x200 - 0x3FF	OS Bootparameter
0x400 - 0x1FFF	User

2.2.8 FLASH Memory

There are two flash device interfaces available as described below, one for the BIOS and one for the CompactFlash socket.

2.2.8.1 BIOS FLASH (Firmware Hub)

For simple BIOS updating a standard onboard 1 MB Firmware Hub device is used.

The FWH stores both the system BIOS and graphics BIOS. It can be updated as new versions of the BIOS become available.

2.2.8.2 CompactFlash Socket

A CompactFlash piggy-back module CP305-CF is installed on the CP305 4HP versions to provide CompactFlash interfacing.

CompactFlash is a very small removable mass storage device. It provides true IDE functionality compatible with the 16-bit ATA/ATAPI-4 interface.

The CompactFlash socket is connected to the IDE port of the ICH7-M and is set to master configuration.

The CP305 supports DMA and both CF type I and CF type II.



Figure 2-1: CompactFlash Socket



The following table provides the pinout for the CompactFlash connector on the CP305-CF module.

Table 2-5: CompactFlash Connector Pinout

I/O	FUNCTION	SIGNAL	PIN	PIN	SIGNAL	FUNCTION	I/O
--	Ground Signal	GND	1	2	D03	Data 3	I/O
I/O	Data 4	D04	3	4	D05	Data 5	I/O
I/O	Data 6	D06	5	6	D07	Data 7	I/O
O	Chip Select 0	IDE_CS0	7	8	GND (A10)	--	--
--	--	GND (ATASEL)	9	10	GND (A09)	--	--
--	--	GND (A08)	11	12	GND (A07)	--	--
--	Power 3.3 V	VCC	13	14	GND (A06)	--	--
--	--	GND (A05)	15	16	GND (A04)	--	--
--	--	GND (A03)	17	18	A02	Address 2	O
O	Address 1	A01	19	20	A00	Address 0	O
I/O	Data 0	D00	21	22	D01	Data 1	I/O
I/O	Data 2	D02	23	24	NC (IOCS16)	--	--
--	--	NC (CD2)	25	26	NC (CD1)	--	--
I/O	Data 11	D11	27	28	D12	Data 12	I/O
I/O	Data 13	D13	29	30	D14	Data 14	I/O
I/O	Data 15	D15	31	32	IDE_CS1	Chip Select 1	O
--	--	NC (VS1)	33	34	IORD	I/O Read	O
O	I/O Write	IOWR	35	36	VCC (WE)	Power 3.3 V	--
I	Interrupt Request	INTRQ	37	38	VCC	Power 3.3 V	--
O	Master/Slave	CSEL (GND/pull-up)	39	40	NC (VS2)	--	--
O	Reset	Reset	41	42	IORDY	I/O Ready	I
I	DMA Request	DMARQ	43	44	DMACK	DMA Acknowledge	O
--	--	NC (DASP)	45	46	PDIAG#/ CBLID#*	Detect ATA100	I
I/O	Data 08	D08	47	48	D09	Data 09	I/O
I/O	Data 10	D10	49	50	GND	Ground Signal	--

* Signal terminated with 10 kΩ pull-down resistor



2.3 Board Interfaces

2.3.1 General Purpose LED Output

The CP305 provides two software programmable GP LEDs. After reset the default configuration for the two front LEDs is Overtemperature and Watchdog status. Additionally, if the WD LED remains on during power-on, it indicates a PCI reset is active, and if the TH LED remains on during power-on, it indicates a power failure. In this case, please check the power supply. If the power supply appears to be functional and the LED remains on, please contact Kontron.

If the WD/GP LED and the TH/GP LED keep flashing during BIOS initialization, a POST code is indicated. For information on the POST Codes, refer to the CP305 BIOS Guide, Chapter 10, POST Codes.

The following table defines the blinking intervals of the WD/GP LED and the TH/GP LED.

Table 2-6: POST Code Indication

LED	NUMBER OF BLINKS
WD/GP LED	high-order nibble (bits 4-7) of POST code
TH/GP LED	low-order nibble (bits 0-3) of POST code

For example, if the WD/GP LED blinks 13 times and the TH/GP LED blinks 5 times, the POST code is 0xD5.

Furthermore, the WD/GP LED and the TH/GP LED can be configured via two onboard registers. For further information refer to Chapter 4 Configuration.

The LED control logic remains in the same state until the next system reset.



Note ...

If the TH/GP LED (overtemperature LED) flashes at regular intervals, it indicates that the processor or the 945GSE Express GMCH junction temperature has reached a level beyond which permanent silicon damage may occur. Upon assertion of Thermtrip, the devices will shut off their internal clocks (thus halting program execution) in an attempt to reduce the junction temperature.

Once activated, Thermtrip remains latched until a cold restart of the CP305 is undertaken (all power off and then on again).



2.3.2 USB Interfaces

The CP305 supports six USB 2.0 ports (two front I/O, two front I/O on the 8HP version, and two on the Rear I/O module). On the USB 2.0 Rear I/O ports, it is strongly recommended to use a cable below 3 meters in length for USB 2.0 devices. The USB 2.0 ports are high-speed, full-speed, and low-speed capable. Hi-speed USB 2.0 allows data transfers of up to 480 Mb/s.

One USB peripheral may be connected to each port.

To connect more USB devices than there are available ports, an external hub is required.

Figure 2-2: USB Connectors J9 and J10




Table 2-7: USB Connectors J9 and J10 Pinout

PIN	SIGNAL	FUNCTION	I/O
1	VCC	VCC	--
2	UV0-	Differential USB-	I/O
3	UV0+	Differential USB+	I/O
4	GND	GND	--



Note ...

The CP305 host interfaces can be used with maximum 500 mA continuous load current as specified in the Universal Serial Bus Specification, Revision 2.0. Short-circuit protection is provided. All the signal lines are EMI-filtered.

2.3.3 Graphics Controller

The 945GSE Express GMCH includes a highly integrated graphics accelerator delivering high performance 3D, 2D graphics capabilities. The internal graphics controller has two independent display pipes allowing for support of two independent display screens.

Integrated 2D/3D Graphics:

- Intel® Gen3.5 integrated graphics engine
- Smart 2D display technology (S2DDT)
- Dynamic video memory technology
- Integrated 400 MHz RAMDAC
- Resolution up to 2048 x 1536 pixels @ 75 Hz (QXGA)
- Integrated H/W Motion Compensation for MPEG2 decode

2.3.3.1 Graphics Memory Usage

The 945GSE Express GMCH supports the Dynamic Video Memory Technology (DVMT 3.0). This technology ensures the most efficient use of all available memory for maximum 3D graphics performance. DVMT dynamically responds to application requirements allocating display and texturing memory resources as required.

The graphics controller is fed with data from the 945GSE memory controller. The graphics performance is directly related to the amount of memory bandwidth available.


2.3.3.2 Graphics Resolution

The 945GSE Express GMCH has an integrated 400 MHz RAMDAC that can directly drive a progressive scan analog monitor up to a resolution of 2048 x 1536 pixels @ 75 Hz.

2.3.3.3 VGA Analog Interface and Connector J6

The 15-pin female connector J6 is used to connect a VGA analog monitor to the CP305 board.

Figure 2-3: D-Sub VGA Con. J6 **Table 2-8: D-Sub VGA Connector J6 Pinout**

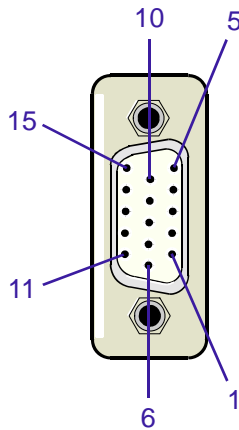

PIN	SIGNAL	FUNCTION	I/O
1	Red	Red video signal output	O
2	Green	Green video signal output	O
3	Blue	Blue video signal output	O
10*	VGA_DETECT	Monitor detection signal	I
13	Hsync	Horizontal sync.	TTL Out
14	Vsync	Vertical sync.	TTL Out
12	Sdata	I ² C data	I/O
15	Sclk	I ² C clock	I/O
9	VCC	Power +5V, 1.5 A fuse protection	O
5,6,7,8	GND	Ground signal	--
4,11	NC	--	--

* Pin 10 is normally defined as Ground but is used on the CP305 as detection signal of a connected monitor if the BIOS setting for the CP305 is "AUTO" (the BIOS default setting is "FRONT").



Note ...

If the automatic VGA detection mechanism on the CP305 is used, the user must ensure that the VGA cable and the connected monitor have a GND signal on pin 10. Otherwise the interface is not operable.

2.3.4 Gigabit Ethernet

The CP305 board includes two 10Base-T/100Base-TX/1000Base-T Ethernet ports based on two Intel® 82574L Gigabit Ethernet controllers, which are connected to the x1 PCI Express interfaces of the ICH7-M.

The Intel® 82574L Gigabit Ethernet Controller's architecture is optimized to deliver high performance with the lowest power consumption. The controller's architecture includes independent transmit and receive queues and a PCI Express interface that maximizes the use of bursts for efficient bus usage.

The Boot from LAN feature is supported.



Note ...

The Ethernet transmission can operate effectively using a CAT5 cable with a maximum length of 100 m.



The Ethernet connectors are realized as RJ-45 connectors. The interfaces provide automatic detection and switching between 10Base-T, 100Base-TX and 1000Base-T data transmission (Auto-Negotiation). Auto-wire switching for crossed cables is also supported (Auto MDI, MDI-X).

RJ-45 Connector J11A/B Pinouts

The J11A/B connector supplies the 10Base-T, 100Base-TX and 1000Base-T interfaces to the Ethernet controller.

Figure 2-4: Dual Gigabit Ethernet Connector J11A/B




Table 2-9: Pinout of the Dual GbE Con. J11A/B

PIN	MDI / STANDARD ETHERNET CABLE					
	10BASE-T		100BASE-TX		1000BASE-T	
	SIGNAL	I/O	SIGNAL	I/O	SIGNAL	I/O
1	TX+	O	TX+	O	BI_DA+	I/O
2	TX-	O	TX-	O	BI_DA-	I/O
3	RX+	I	RX+	I	BI_DB+	I/O
4	-	-	-	-	BI_DC+	I/O
5	-	-	-	-	BI_DC-	I/O
6	RX-	I	RX-	I	BI_DB-	I/O
7	-	-	-	-	BI_DD+	I/O
8	-	-	-	-	BI_DD-	I/O

Ethernet LED Status

ACT (green): This LED monitors network connection and activity. The LED lights up when a valid link (cable connection) has been established. The LED goes temporarily off if network packets are being sent or received through the RJ-45 port. When this LED remains off, a valid link has not been established due to a missing or a faulty cable connection.

SPEED (green/orange): This LED lights up to indicate a successful 100Base-TX or 1000BASE-T connection. When lit green, it indicates a 100Base-TX connection and when lit orange it indicates a 1000Base-T connection. When not lit and the ACT-LED is active, the connection is operating at 10Base-T.





2.3.5 SATA Interface

The ICH7-M on the CP305 supports two onboard SATA interfaces that can be switched to rear I/O. The SATA interfaces are running at 1.5 Gbit/s.

Table 2-10: SATA Port Mapping

SATA PORT	ONBOARD CONNECTOR	REAR I/O CONNECTOR
SATA-A	J4	J2 (pins E5, E6, E8 and E9)
SATA-B	onboard SATA connector on the extension module (8HP)	J2 (pins A5, A6, A8 and A9)



Note ...

Either the onboard SATA ports or the rear I/O SATA ports can be used simultaneously. Refer to BIOS Guide for information regarding the default setting of the SATA port configuration.

2.3.5.1 Serial ATA Connector J4

The CP305 is equipped with a SATA connector, J4, which is used to connect standard HDDs and other SATA devices to the CP305.

Figure 2-5: SATA Connector J4 **Table 2-11: SATA Connector J4 Pinout**



PIN	SIGNAL	FUNCTION	I/O
1	GND	Ground signal	--
2	SATA_TX0+	Differential Transmit +	O
3	SATA_TX0-	Differential Transmit -	O
4	GND	Ground signal	--
5	SATA_RX0-	Differential Receive -	I
6	SATA_RX0+	Differential Receive +	I
7	GND	Ground signal	--



Note ...

To ensure secure connectivity, the SATA connector supports the use of SATA II cables (SATA cables with locking latch).



2.3.6 CompactPCI Bus Interface

The complete CompactPCI connector configuration comprises two connectors named J1 and J2.

Their function is as follows:

- J1: 32-bit CompactPCI interface with PCI bus signals, arbitration, clock and power
- J2: arbitration, clock and optionally either Rear I/O interface functionality or 64-bit termination

The board is capable of driving up to seven CompactPCI slots, with individual arbitration and clock signals. The CP305 is not hot-swappable but supports the addition or removal of other boards whilst in a powered-up state.


The CompactPCI standard is electrically identical to the PCI local bus. However, these systems are enhanced to operate in rugged industrial environments and to support multiple slots.

2.3.6.1 CompactPCI Connector Keying

CompactPCI backplane connectors support guide lugs to ensure a correct polarized mating (3.3 V or 5 V V(I/O) coding).

The CP305 supports universal (3.3 V and 5 V) PCI V(I/O) signaling voltages with one common termination resistor configuration. Therefore, the CP305 can be inserted in both, 3.3V and 5 V CompactPCI systems and provides itself no guide lug.

Figure 2-6: CPCI Connectors J1/J2

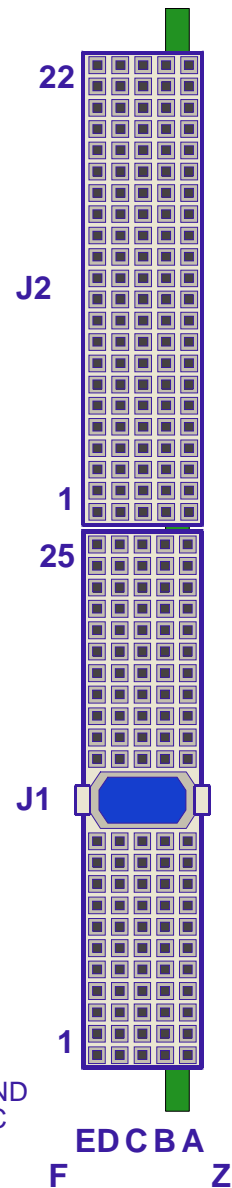

Note:
Pinrow F: GND
Pinrow Z: NC



2.3.6.2 CompactPCI Connectors J1 and J2 Pinouts

The CP305 is provided with two 2 mm x 2 mm pitch female CompactPCI bus connectors, J1 and J2.

Table 2-12: CompactPCI Bus Connector J1 Pinout

PIN	ROW Z	ROW A	ROW B	ROW C	ROW D	ROW E	ROW F
25	NC	5V	REQ64#	ENUM#	3.3V	5V	GND
24	NC	AD[1]	5V	V(I/O)	AD[0]	ACK64#	GND
23	NC	3.3V	AD[4]	AD[3]	5V	AD[2]	GND
22	NC	AD[7]	GND	3.3V	AD[6]	AD[5]	GND
21	NC	3.3V	AD[9]	AD[8]	M66EN#	C/BE[0]#	GND
20	NC	AD[12]	GND	V(I/O)	AD[11]	AD[10]	GND
19	NC	3.3V	AD[15]	AD[14]	GND	AD[13]	GND
18	NC	SERR#	GND	3.3V	PAR	C/BE[1]#	GND
17	NC	3.3V	NC	NC	GND	PERR#	GND
16	NC	DEVSEL#	GND	V(I/O)	STOP#	LOCK#	GND
15	NC	3.3V	FRAME#	IRDY#	GND	TRDY#	GND
12-14	Key Area						
11	NC	AD[18]	AD[17]	AD[16]	GND	C/BE[2]#	GND
10	NC	AD[21]	GND	3.3V	AD[20]	AD[19]	GND
9	NC	C/BE[3]#	NC	AD[23]	GND	AD[22]	GND
8	NC	AD[26]	GND	V(I/O)	AD[25]	AD[24]	GND
7	NC	AD[30]	AD[29]	AD[28]	GND	AD[27]	GND
6	NC	REQ0#	GND	3.3V	CLK0	AD[31]	GND
5	NC	NC	NC	RST#	GND	GNT0#	GND
4	NC	NC	NC	V(I/O)	INTP*	INTS*	GND
3	NC	INTA#	INTB#	INTC#	5V	INTD#	GND
2	NC	TCK	5V	TMS	NC	TDI	GND
1	NC	5V	NC	TRST#	+12V	5V	GND

* The INTP and INTS signals are terminated to V(I/O) and not implemented on the CP305.



Table 2-13: 64-bit CompactPCI Bus Connector J2 Pinout (CP305 Front I/O Vers.)

PIN	ROW Z	ROW A	ROW B	ROW C	ROW D	ROW E	ROW F
22	NC	NC	NC	NC	NC	NC	GND
21	NC	CLK6	GND	RSV	RSV	RSV	GND
20	NC	CLK5	GND	RSV	RSV	RSV	GND
19	NC	GND	GND	RSV	RSV	RSV	GND
18	NC	RSV	RSV	RSV	RSV	RSV	GND
17	NC	RSV	RSV	PRST#	REQ6#	GNT6#	GND
16	NC	RSV	RSV	DEG#	RSV	RSV	GND
15	NC	RSV	RSV	FAL#	REQ5#	GNT5#	GND
14	NC	AD[35]	AD[34]	AD[33]	RSV	AD[32]	GND
13	NC	AD[38]	RSV	RSV	AD[37]	AD[36]	GND
12	NC	AD[42]	AD[41]	AD[40]	RSV	AD[39]	GND
11	NC	AD[45]	RSV	RSV	AD[44]	AD[43]	GND
10	NC	AD[49]	AD[48]	AD[47]	RSV	AD[46]	GND
9	NC	AD[52]	GND	RSV	AD[51]	AD[50]	GND
8	NC	AD[56]	AD[55]	AD[54]	GND	AD[53]	GND
7	NC	AD[59]	RSV	RSV	AD[58]	AD[57]	GND
6	NC	AD[63]	AD[62]	AD[61]	GND	AD[60]	GND
5	NC	C/BE[5]#	GND	RSV	C/BE[4]#	PAR64	GND
4	NC	V(I/O)	RSV	C/BE[7]#	RSV	C/BE[6]#	GND
3	NC	CLK4	GND	GNT3#	REQ4#	GNT4#	GND
2	NC	CLK2	CLK3	SYSEN#	GNT2#	REQ3#	GND
1	NC	CLK1	GND	REQ1#	GNT1#	REQ2#	GND



Note ...

The 64-bit CompactPCI signals are not used on the board, but they are terminated to V(I/O).





2.3.7 Optional Rear I/O Interface

The CP305 board provides optional Rear I/O connectivity for special compact systems. Some standard PC interfaces are implemented and assigned to the front panel and to the rear connector J2.

When the Rear I/O module is used, the signals of some of the main board/front panel connectors are routed to the Rear I/O module interface. Thus, the Rear I/O module makes it much easier to remove the CPU in the rack as there is practically no cabling on the CPU board.

For the system Rear I/O feature a special backplane is necessary. The CP305 with Rear I/O is compatible with all standard CompactPCI passive backplanes with Rear I/O support on the system slot.

The CP305 Rear I/O provides the following interfaces (all signals are available on J2 only if the board is ordered with Rear I/O functionality):

- 32-bit/33 MHz CompactPCI (J1) and Rear I/O (J2)
- Two USB 2.0 ports
- Two Gigabit Ethernet ports without LED signals
- Two SATA ports
- Two COM ports (3.3 V TTL level)
- VGA analog port
- One fan control input
- One PWM output
- Management and control signals
- Input for +5V standby power

Note ...



The pinout of the rear I/O CompactPCI connector on the CP305 is not compatible with that of the CP302, CP303, CP304, CP306, etc., but is compatible with the pinout of CP307's and CP308's rear I/O CompactPCI connector. For this reason, only rear I/O modules specially designed for the CP305, the CP308 or the CP307 can be used with the board.



2.3.7.1 Optional Rear I/O Interface on CompactPCI Connector J2



Warning!

To support the Rear I/O feature a special backplane is necessary. Do not plug a Rear I/O configured board in a non-system slot Rear I/O backplane. Failure to comply with the above will result in damage to your board.

Table 2-14: Rear I/O CompactPCI Bus Connector J2 Pinout (CP305 Rear I/O Vers.)

PIN	ROW Z	ROW A	ROW B	ROW C	ROW D	ROW E	ROW F
22	NC	NC	NC	NC	NC	NC	GND
21	NC	CLK6	GND	USB1P / bi	USB3P / bi	USB1_5V / out	GND
20	NC	CLK5	GND	USB1N / bi	USB3N / bi	USB3_5V / out	GND
19	NC	GND	GND	PWR_BTN# / in	PWR_SLPS3# / out	RIO_3.3V / out	GND
18	NC	1RXD / in	1DCD / in	1DTR / out	GPI1/2CTS / in	1CTS / in	GND
17	NC	1TXD / out	GPI0/2RXD / in	PRST#	REQ6#	GNT6#	GND
16	NC	1DSR / in	1RTS / out	DEG#	RSV	1RI / in	GND
15	NC	PWR_5VSTDBY / in	FAN_SENSE / in	FAL#	REQ5#	GNT5#	GND
14	NC	IPA_DA+ / bi	IPA_DA- / bi	GPO1/2RTS / out	IPA_DC+ / bi	IPA_DC- / bi	GND
13	NC	IPA_DB+ / bi	IPA_DB- / bi	GPI4/2RI / in	IPA_DD+ / bi	IPA_DD- / bi	GND
12	NC	IPB_DA+ / bi	IPB_DA- / bi	RIO_2V5 / out	IPB_DC+ / bi	IPB_DC- / bi	GND
11	NC	IPB_DB+ / bi	IPB_DB- / bi	GPI3/2DCD / in	IPB_DD+ / bi	IPB_DD- / bi	GND
10	NC	NC	GPO0/2TXD / out	VGA_RED / out	GPO2/2DTR / out	NC	GND
9	NC	SATA-B-TXP / out	GND	VGA_HSYNC / out	NC	SATA-A-TXP / out	GND
8	NC	SATA-B-TXN / out	NC	VGA_BLUE / out	GND	SATA-A-TXN / out	GND
7	NC	NC	GPI2/2DSR / in	VGA_I2C_DAT / bi	PWM_OUT / out OD*	NC	GND
6	NC	SATA-B-RXP / in	NC	VGA_GREEN / out	GND	SATA-A-RXP / in	GND
5	NC	SATA-B-RXN / in	GND	VGA_VSYNC / out	NC	SATA-A-RXN / in	GND
4	NC	VI/O	RIO_5V / out	VGA_I2C_CLK / out	GPI0_CFG0 / in	NC	GND
3	NC	CLK4	GND	GNT3#	REQ4#	GNT4#	GND
2	NC	CLK2	CLK3	SYSEN#	GNT2#	REQ3#	GND
1	NC	CLK1	GND	REQ1#	GNT1#	REQ2#	GND

* Pin D7 is an open drain output and has no pull-up resistor on the CP305.





Warning!

The RIO_XXX signals are power supply **OUTPUTS** to supply the rear I/O module with power. These pins **MUST NOT** be connected to any other power source, either within the backplane itself or within a rear I/O module.

Failure to comply with the above will result in damage to your board.



Note ...

The signal on the GPIO configuration pin D4 tolerates only 3.3 V signalling and has an internal pull-up resistor to 3.3V.

The pins for the interfaces COM1 and GPIO/COM2 (pins A18, A17, A16, B18, B17, B16, B10, B7, C18, C14, C13, C11, D18, D10, E18, and E16) tolerate only 3.3 V signaling and their inputs have internal pull-up resistors.

Legend for Table 2-14:

SATAx	Serial ATA port
IPx	Gigabit Ethernet port
USBx	USB interface and power
VGAx	VGA signals
COM1x	COM1 port
GPIOx	COM2 port or GPIO
PWRx	Power Management signals
5V/3.3V	Power
GPIO_CFG0	GPIO configuration (GPIO or COM2)

With the GPIO_CFG0 signal on the Rear I/O module the active interface can be selected.

Table 2-15: GPIO Signal Description

GPIO SIGNAL	DESCRIPTION
GPIO_CFG0	0: COM1; GPIO 1: COM1; COM2



Note ...

The default value is 1 if the pin is not connected (pull-up resistor on CP305). If connected, the default value is depending on the Rear I/O module.

2.3.7.2 Rear I/O Configuration

Rear I/O interfaces are only available on Rear I/O versions of the board.

In order to implement the system Rear I/O feature, a system slot Rear I/O backplane is necessary. This backplane must comply with the CompactPCI Specification PICMG 2.0 R3.0, October 1999.

**Warning!**

To support the Rear I/O feature a special backplane is necessary. Do not plug a Rear I/O configured board in a non-system slot Rear I/O backplane. This will damage the board.

Ethernet Interfaces

Gigabit Ethernet signals are available either on the front RJ-45 connector or on the Rear I/O interface due the implemented switches on the CP305.

Both Gigabit Ethernet channels are individually switchable to front or Rear I/O. Switching over from front to Rear I/O or vice versa is effected using the BIOS settings or the board-specific registers (default: front I/O). For further information on the BIOS settings, refer to the CP305 BIOS Guide, Chapter 8, OEM Feature. For further information on the board-specific registers, refer to Chapter 4.3.5, Table 4-7, "I/O Configuration Register".

VGA Interface

VGA signals are available either on the front VGA connector or on the Rear I/O interface due the implemented switches on the CP305. Switching over from front to Rear I/O or vice versa is effected using the BIOS (default: front I/O).

**Note ...**

The CP305 provides 150 Ω termination resistors for the red, green and blue VGA signals.

Thus, further 150 Ω termination resistors are necessary on the Rear I/O module to reach the required 75 Ω termination for the VGA connection.

Serial Interface COM1 and COM2

The COM1 is available either on the front panel of the 8HP CP305 version or on the Rear I/O interface. Switching over from front to Rear I/O or vice versa is effected using the BIOS settings or the board-specific registers (default: front I/O). For further information refer to Chapter 4.3.5, Table 4-7, "I/O Configuration Register".

The COM2 port can be used only on the Rear I/O interface.

USB Interface

There are six independent USB interfaces available, four ports are routed to the 4-pin front I/O connectors (two on the 4HP CP305 version and two further on the 8HP CP305 version). The other two ports are only available on the Rear I/O connector.

**Note ...**

All six USB ports may be used at the same time. It is strongly recommended to use cables less than 3 metres in length for the Rear I/O interfaces.

SATA Interface

The ICH7-M on the CP305 supports two onboard SATA interfaces that can be switched to rear I/O. For further information on the SATA Port Mapping, refer to Chapter 2.3.5, SATA Interface.



Chapter **3**

Installation



This page has been intentionally left blank.





3. Installation

The CP305 has been designed for easy installation. However, the following standard precautions, installation procedures, and general information must be observed to ensure proper installation and to preclude damage to the board, other system components, or injury to personnel.

3.1 Safety Requirements

The following safety precautions must be observed when installing or operating the CP305. *Kontron* assumes no responsibility for any damage resulting from failure to comply with these requirements.

Warning!



Due care should be exercised when handling the board due to the fact that the heat sink can get very hot. Do not touch the heat sink when installing or removing the board.

In addition, the board should not be placed on any surface or in any form of storage container until such time as the board and heat sink have cooled down to room temperature.

Caution!



If your board type is not specifically qualified as being hot swap capable, switch off the CompactPCI system power before installing the board in a free CompactPCI slot. Failure to do so could endanger your life or health and may damage your board or system.

Note ...



Certain CompactPCI boards require bus master and/or Rear I/O capability. If you are in doubt whether such features are required for the board you intend to install, please check your specific board and/or system documentation to make sure that your system is provided with an appropriate free slot in which to insert the board.

ESD Equipment!



This CompactPCI board contains electrostatically sensitive devices. Please observe the necessary precautions to avoid damage to your board:

- Discharge your clothing before touching the assembly. Tools must be discharged before use.
- Do not touch components, connector-pins or traces.
- If working at an anti-static workbench with professional discharging equipment, please do not omit to use it.



3.2 CP305 Initial Installation Procedures

The following procedures are applicable only for the initial installation of the CP305 in a system. Procedures for standard removal and hot swap operations are found in their respective chapters.

To perform an initial installation of the CP305 in a system proceed as follows:

1. Ensure that the safety requirements indicated in Chapter 3.1 are observed.



Warning!

Failure to comply with the instruction below may cause damage to the board or result in improper system operation.

2. Ensure that the board is properly configured for operation in accordance with application requirements before installing. For information regarding the configuration of the CP305 refer to Chapter 4. For the installation of CP305-specific peripheral devices and Rear I/O devices refer to the appropriate sections in Chapter 3.



Warning!

Care must be taken when applying the procedures below to ensure that neither the CP305 nor other system boards are physically damaged by the application of these procedures.

3. To install the CP305 perform the following:
 1. Ensure that no power is applied to the system before proceeding.



Warning!

When performing the next step, **DO NOT** push the board into the backplane connectors. Use the ejector handles to seat the board into the backplane connectors.

2. Carefully insert the board into the slot designated by the application requirements for the board until it makes contact with the backplane connectors.
3. Using the ejector handle, engage the board with the backplane. When the ejector handle is locked, the board is engaged.
4. Fasten the front panel retaining screws (two on the 4HP version and four on the 8HP).
5. Connect all external interfacing cables to the board as required.
6. Ensure that the board and all required interfacing cables are properly secured.

The CP305 is now ready for operation. For operation of the CP305, refer to the appropriate CP305-specific software, application, and system documentation.



3.3 Standard Removal Procedures

To remove the board proceed as follows:

1. Ensure that the safety requirements indicated in Chapter 3.1 are observed. Particular attention must be paid to the warning regarding the heat sink!



Warning!

Care must be taken when applying the procedures below to ensure that neither the CP305 nor system boards are physically damaged by the application of these procedures.

2. Ensure that no power is applied to the system before proceeding.
3. Disconnect any interfacing cables that may be connected to the board.
4. Unscrew the front panel retaining screws (two on the 4HP version and four on the 8HP).
5. Disengage the board from the backplane by first unlocking the board ejection handles and then by pressing the handles as required until the board is disengaged.
6. After disengaging the board from the backplane, pull the board out of the slot.



Warning!

Due care should be exercised when handling the board due to the fact that the heat sink can get very hot. Do not touch the heat sink when changing the board.

7. Dispose of the board as required.

3.4 Hot Swap Procedures

The CP305 is not designed for hot swap operation. Do not attempt to hot swap this board. However, the CP305 supports the addition or removal of other boards whilst in a powered-up state.

3.5 Installation of CP305 Peripheral Devices

The CP305 is designed to accommodate a variety of peripheral devices whose installation varies considerably. The following chapters provide information regarding installation aspects and not detailed procedures.

3.5.1 CompactFlash Installation

The CompactFlash socket supports all available CompactFlash ATA cards type I and type II. To improve mechanical stability, the CompactFlash card can be secured after installation by inserting an appropriate fixation mechanism in the hole next to the CompactFlash socket. For further information, please contact Kontron.



Note ...

The CP305 does not support removal and reinsertion of the CompactFlash storage card while the board is in a powered-up state. Connecting the CompactFlash cards while the power is on, which is known as "hot plugging", may damage your system.



3.5.2 USB Device Installation

The CP305 supports all USB plug and play computer peripherals (e.g. keyboard, mouse, printer, etc.).



Note ...

All USB devices may be connected or removed while the host or other peripherals are powered up.

3.5.3 Battery Replacement

The lithium battery must be replaced with an identical battery or a battery type recommended by the manufacturer. A suitable battery type is CR2025.



Note ...

If a CP305-HDD module is used on the CP305, either the CP305 or the CP305-HDD module may be equipped with a battery.

Using one battery on the CP305 and one on the CP305-HDD module simultaneously may result in premature discharge of the batteries.



Note ...

The user must be aware that the battery's operational temperature range is less than the CP305's storage temperature range.

For exact range information, refer to the battery manufacturer's specifications.



Note ...

Care must be taken to ensure that the battery is correctly replaced.

The battery should be replaced only with an identical or equivalent type recommended by the manufacturer.

Dispose of used batteries according to the manufacturer's instructions.

The typical life expectancy of a 170 mAh battery (CR2025) is 5 - 6 years with an average on-time of 8 hours per working day at an operating temperature of 30°C. However, this typical value varies considerably because the life expectancy is dependent on the operating temperature and the standby time (shutdown time) of the system in which it operates.

To ensure that the lifetime of the battery has not been exceeded it is recommended to exchange the battery after 4 - 5 years.



3.5.4 Hard Disk Installation

The following information pertains to hard disks which may be connected to the CP305 via SATA or IDE cabling. To install a hard disk, it is necessary to perform the following operations in the given order:

1. Install the hardware.



Warning!

The incorrect connection of power or data cables may damage your hard disk unit and/or the CP305 board.



Note ...

Some symptoms of incorrectly installed HDDs are:

- Hard disk drives are not auto-detected: may be a master/slave problem (only for IDE HDD) or a bad SATA or IDE cable. Should this occur, contact your vendor.
- Hard Disk Drive fail message at boot-up: may be a bad cable or lack of power going to the drive.
- No video on boot-up: usually means the cable is installed backwards (can only occur if not-coded cables are used).
- Hard drive light is constantly on: usually means bad cable or defective drives/motherboard. Should this occur, try another HDD.
- Hard drives do not power up: check power cables and cabling. This may also result from a bad power supply or HDD drive.

2. Initialize the software necessary to run the chosen operating system.

3.6 Software Installation

The installation of all onboard peripheral drivers is described in detail in the relevant Driver Kit files or Board Support Packages (BSP).

Installation of an operating system is a function of the OS software and is not addressed in this manual. Refer to the appropriate OS software documentation for installation.



Note ...

Users working with pre-configured operating system installation images for Plug and Play compliant operating systems, for example Windows® XP, Windows® XP Embedded, must take into consideration that the stepping and revision ID of the chipset and/or other onboard PCI devices may change. Thus, a re-configuration of the operating system installation image deployed for a previous chipset stepping or revision ID is in most cases required. The corresponding operating system will detect new devices according to the Plug and Play configuration rules.



This page has been intentionally left blank.






Chapter **4**

Configuration



This page has been intentionally left blank.





4. Configuration

4.1 Clearing BIOS CMOS Setup

If the system does not boot (due to, for example, the wrong BIOS configuration or wrong password setting), the CMOS setting may be cleared using the solder jumper JP2.

Procedure for clearing the CMOS setting:

The system is booted with the jumper in the new, closed position, then powered down again. The jumper is reset back to the normal position, then the system is rebooted again.

Table 4-1: Clearing BIOS CMOS Setup

JP2	DESCRIPTION
<i>Open</i>	<i>Normal boot using the CMOS settings</i>
Closed	Clear the CMOS settings and use the default values

The default setting is indicated by using italic bold.

4.2 I/O Address Map

The following table sets out the memory map for the I/O memory. The shaded table cells indicate CP305-specific registers.

Table 4-2: I/O Address Map

ADDRESS	DEVICE
0x080	BIOS POST Code Low Byte Register
0x081	BIOS POST Code High Byte Register
0x280 - 0x281	Reserved
0x282	Watchdog Timer Control Register
0x283	Reserved
0x284	Hardware and Logic Revision Index Register
0x285	Reset Status Register
0x286	I/O Status Register
0x287	I/O Configuration Register
0x288	Board ID Register
0x289	Board Interrupt Configuration Register
0x28A	BIOS Configuration Register
0x28B - 0x28C	Reserved
0x28D	LED Control Register
0x28E	Rear I/O GPIO Register
0x28F	Reserved



4.3 CP305-Specific Registers

The following registers are special registers which the CP305 uses to watch the onboard hardware special features and a number of CompactPCI control signals.

Normally, only the system BIOS uses these registers, but they are documented here for application use as required.



Note ...

Take care when modifying the contents of these registers as the system BIOS may be relying on the state of the bits under its control.

4.3.1 Watchdog Timer Control Register

The CP305 has one Watchdog Timer provided with a programmable timeout ranging from 125 msec to 4096 sec. Failure to strobe the Watchdog Timer within a set time period results in a system reset or an interrupt. The interrupt mode can be configured via the board interrupt configuration register (0x289).

There are four possible modes of operation involving the Watchdog Timer:

- Timer only mode
- Reset mode
- Interrupt mode
- Dual stage mode

At power on the Watchdog is not enabled. If not required, it is not necessary to enable it. If required, the bits of the Watchdog Timer Control Register (0x282) must be set according to the application requirements. To operate the Watchdog, the mode and time period required must first be set and then the Watchdog enabled. Once enabled, the Watchdog can only be disabled or the mode or the timeout changed by powering down and then up again. To prevent a Watchdog timeout, the Watchdog must be retriggered before timing out. This is done by writing a '1' to the WTR bit. In the event a Watchdog timeout does occur, the WTE bit is set to '1'. What transpires after this depends on the mode selected.

The four operational Watchdog Timer modes can be configured by the WMD[1:0] bits, and are described as follows:

Timer only mode - In this mode the Watchdog is enabled using the required timeout period. Normally, the Watchdog is retriggered by writing a '1' to the WTR bit. In the event a timeout occurs, the WTE bit is set to '1'. This bit can then be polled by the application and handled accordingly. To continue using the Watchdog, write a '1' to the WTE bit, and then retrigger the Watchdog using WTR. The WTE bit retains its setting as long as no power down-up is done. Therefore, this bit may be used to verify the status of the Watchdog.

Reset mode - This mode is used to force a hard reset in the event of a Watchdog timeout. To be effective, the hard reset must not be masked or otherwise negated. In addition, the WTE bit is not reset by the hard reset, which makes it available if necessary to determine the status of the Watchdog prior to the reset.

Interrupt mode - This mode causes the generation of an interrupt in the event of a Watchdog timeout. The interrupt handling is a function of the application. If required, the WTE bit can be used to determine if a Watchdog timeout has occurred.

Dual stage mode - This is a complex mode where in the event of a timeout two things occur: 1) an interrupt is generated, and 2) the Watchdog is retriggered automatically. In the event a second timeout occurs immediately following the first timeout, a hard reset will be generated. If the

Watchdog is retrIGGERED normally, operation continues. The interrupt generated at the first time-out is available to the application to handle the first timeout if required. As with all of the other modes, the WTE bit is available for application use.

Table 4-3: Watchdog Timer Control Register

REGISTER NAME		WATCHDOG TIMER CONTROL REGISTER							SIZE																																																																																							
ADDRESS		0x282							8 bits																																																																																							
BIT POSITION		MSB	7	6	5	4	3	2	1	0	LSB																																																																																					
CONTENT		WTE	WMD1	WMD0	WEN/WTR	WTM3	WTM2	WTM1	WTM0																																																																																							
DEFAULT		0	0	0	0	0	0	0	0																																																																																							
ACCESS		R/W	R/W	R/W	R/W	R/W	R/W	R/W	R/W																																																																																							
BIT	NAME	DESCRIPTION/FUNCTION																																																																																														
7	WTE	Watchdog Timer Expired status bit: 0 Watchdog Timer has not expired 1 Watchdog Timer has expired Writing a '1' to this bit resets it to 0																																																																																														
6 - 5	WMD[1:0]	Watchdog mode settings: <table border="1" style="margin-left: 40px;"> <thead> <tr> <th>WMD1</th> <th>WMD0</th> <th>Mode</th> </tr> </thead> <tbody> <tr> <td>0</td> <td>0</td> <td>Timer only</td> </tr> <tr> <td>0</td> <td>1</td> <td>Reset</td> </tr> <tr> <td>1</td> <td>0</td> <td>Interrupt</td> </tr> <tr> <td>1</td> <td>1</td> <td>Dual Stage</td> </tr> </tbody> </table>										WMD1	WMD0	Mode	0	0	Timer only	0	1	Reset	1	0	Interrupt	1	1	Dual Stage																																																																						
WMD1	WMD0	Mode																																																																																														
0	0	Timer only																																																																																														
0	1	Reset																																																																																														
1	0	Interrupt																																																																																														
1	1	Dual Stage																																																																																														
4	WEN/WTR	Watchdog enable/watchdog trigger control bit: 0 Watchdog Timer has not been enabled Prior to the Watchdog being enabled, this bit is known as WEN. After the Watchdog is enabled, it is known as WTR. Once the Watchdog Timer has been enabled, this bit cannot be reset to 0. As long as the Watchdog Timer is enabled, it will indicate a '1'. 1 Watchdog Timer is enabled Writing a '1' to this bit causes the Watchdog to be retrIGGERED to the timer value indicated by bits WTM[3:0].																																																																																														
3 - 0	WTM[3:0]	Watchdog timeout time settings: <table border="1" style="margin-left: 40px;"> <thead> <tr> <th>WTM3</th> <th>WTM2</th> <th>WTM1</th> <th>WTM0</th> <th>Value</th> </tr> </thead> <tbody> <tr><td>0</td><td>0</td><td>0</td><td>0</td><td>125 ms</td></tr> <tr><td>0</td><td>0</td><td>0</td><td>1</td><td>250 ms</td></tr> <tr><td>0</td><td>0</td><td>1</td><td>0</td><td>500 ms</td></tr> <tr><td>0</td><td>0</td><td>1</td><td>1</td><td>1 s</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>0</td><td>2 s</td></tr> <tr><td>0</td><td>1</td><td>0</td><td>1</td><td>4 s</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>0</td><td>8 s</td></tr> <tr><td>0</td><td>1</td><td>1</td><td>1</td><td>16 s</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>0</td><td>32 s</td></tr> <tr><td>1</td><td>0</td><td>0</td><td>1</td><td>64 s</td></tr> <tr><td>1</td><td>0</td><td>1</td><td>0</td><td>128 s</td></tr> <tr><td>1</td><td>0</td><td>1</td><td>1</td><td>256 s</td></tr> <tr><td>1</td><td>1</td><td>0</td><td>0</td><td>512 s</td></tr> <tr><td>1</td><td>1</td><td>0</td><td>1</td><td>1024 s</td></tr> <tr><td>1</td><td>1</td><td>1</td><td>0</td><td>2048 s</td></tr> <tr><td>1</td><td>1</td><td>1</td><td>1</td><td>4096 s</td></tr> </tbody> </table> The Watchdog timeout time settings may have a deviation of 20 ppm + 2 ms.										WTM3	WTM2	WTM1	WTM0	Value	0	0	0	0	125 ms	0	0	0	1	250 ms	0	0	1	0	500 ms	0	0	1	1	1 s	0	1	0	0	2 s	0	1	0	1	4 s	0	1	1	0	8 s	0	1	1	1	16 s	1	0	0	0	32 s	1	0	0	1	64 s	1	0	1	0	128 s	1	0	1	1	256 s	1	1	0	0	512 s	1	1	0	1	1024 s	1	1	1	0	2048 s	1	1	1	1	4096 s
WTM3	WTM2	WTM1	WTM0	Value																																																																																												
0	0	0	0	125 ms																																																																																												
0	0	0	1	250 ms																																																																																												
0	0	1	0	500 ms																																																																																												
0	0	1	1	1 s																																																																																												
0	1	0	0	2 s																																																																																												
0	1	0	1	4 s																																																																																												
0	1	1	0	8 s																																																																																												
0	1	1	1	16 s																																																																																												
1	0	0	0	32 s																																																																																												
1	0	0	1	64 s																																																																																												
1	0	1	0	128 s																																																																																												
1	0	1	1	256 s																																																																																												
1	1	0	0	512 s																																																																																												
1	1	0	1	1024 s																																																																																												
1	1	1	0	2048 s																																																																																												
1	1	1	1	4096 s																																																																																												



4.3.2 Hardware and Logic Revision Index Register

The Hardware and Logic Revision Index Register signals to the software when differences in the hardware and the logic require different handling by the software. It starts with the value 0x00 for the initial board prototypes and will be incremented with each change in hardware as development continues.

Table 4-4: Hardware and Logic Revision Index Register

REGISTER NAME		HARDWARE AND LOGIC REVISION INDEX REGISTER								SIZE
ADDRESS		0x284								8 bits
BIT POSITION	MSB	7	6	5	4	3	2	1	0	LSB
CONTENT		HWRI3	HWRI2	HWRI1	HWRI0	LRI3	LRI2	LRI1	LRI0	
DEFAULT		0	0	0	0	0	0	0	0	
ACCESS		R	R	R	R	R	R	R	R	
BIT	NAME	DESCRIPTION/FUNCTION								
7 - 4	HWRI[3:0]	Hardware revision ID: 0000 Index 0000								
3 - 0	LRI[3:0]	Logic revision ID: 0000 Index 0000								



4.3.3 Reset Status Register

The Reset Status Register is used to determine the reset source. The I/O location is 0x285.

Table 4-5: Reset Status Register

REGISTER NAME		RESET STATUS REGISTER							SIZE		
ADDRESS		0x285							8 bits		
BIT POSITION		MSB	7	6	5	4	3	2	1	0	LSB
CONTENT		PRST	Res.	Res.	Res.	Res.	FRST	Res.	WRST		
DEFAULT		0	0	0	0	0	0	0	0		
ACCESS		R/W	R	R	R	R	R/W	R	R/W		
BIT	NAME	DESCRIPTION / FUNCTION									
7	PRST*	0 Indicates the state after setting back the bit 1 Power-on reset (cold start)									
6 - 3	Res.	Reserved									
2	FRST*	0 System reset generated by power-on reset 1 System reset generated by front panel reset									
1	Res.	Reserved									
0	WRST*	0 System reset generated by power-on reset 1 System reset generated by Watchdog									

* Read/Write Clear. Writing a '1' to this bit clears the bit.



Note ...

The Reset Status Register is set to the default values by power-on reset, not by PCI reset.

4.3.4 I/O Status Register

The I/O Status Register describes the CompactPCI, the Rear I/O and the local control signals. The Rear I/O configuration is shown by the bits RCFG[1:0]. To indicate the active Firmware Hub, the FSTA[1:0] bits are used. The CSLOT bit reflects the kind of slot in which the CP305 is plugged in. The fail signal is an output of the power supply and indicates a power supply failure. For the description of the derate and enumeration signals, please refer to the Board Interrupt Configuration Register (0x289).

Table 4-6: I/O Status Register

REGISTER NAME		I/O STATUS REGISTER							SIZE		
ADDRESS		0x286							8 bits		
BIT POSITION		MSB	7	6	5	4	3	2	1	0	LSB
CONTENT		RCFG1	RCFG0	FSTA1	FSTA0	CSLOT	CENUM	CFAIL	CDER		
DEFAULT		--	--	0	0	0	0	0	0		
ACCESS		R	R	R	R	R	R	R	R		
BIT	NAME	DESCRIPTION/FUNCTION									
7 - 6	RCFG[1:0]	These bits indicate the Rear I/O configuration: 00 Rear I/O disabled 01 COM1, GPIO 10 Reserved 11 COM1, COM2 The default value of these bits depends on the CP305 version ordered (front or rear I/O) and on the Rear I/O module, if used.									
5 - 4	FSTA[1:0]	These bits indicate the active BIOS Firmware Hub Flash status: 00 BIOS boot from FWH0 01 Reserved 10 BIOS boot from external FWH on the CP305-HDD module 11 Reserved									
3	CSLOT	0 Installed in a system slot 1 Installed in a peripheral slot									
2	CENUM	0 Indicates the insertion or removal of a hot swap system board (CPCI ENUM) 1 No hot swap event									
1	CFAIL	0 Power supply failure (CPCI FAIL signal) 1 Power normal									
0	CDER	0 Power derating (CPCI DEG signal) 1 Power normal									

4.3.5 I/O Configuration Register

The I/O Configuration Register holds a series of bits defining the onboard configuration.

Table 4-7: I/O Configuration Register

REGISTER NAME	I/O CONFIGURATION REGISTER								SIZE	
ADDRESS	0x287								8 bits	
BIT POSITION	MSB	7	6	5	4	3	2	1	0	LSB
CONTENT	Res.	POST	LED1	LED0	BBEI	SCOM1	SETH2	SETH1		
DEFAULT	0	0*	0	0	0*	1	0	0		
ACCESS	R/W	R/W	R/W	R/W	R	R/W	R/W	R/W	R/W	
BIT	NAME	DESCRIPTION / FUNCTION								
7	Res.	Reserved								
6	POST	POST LEDs' configuration: 0 Enabled 1 Disabled								
5	LED1	LED1 configuration/enable: 0 Overtemperature LED 1 General Purpose LED								
4	LED0	LED0 configuration/enable: 0 Watchdog LED 1 General Purpose LED								
3	BBEI	BIOS Boot End Indication: 0 BIOS is booting 1 BIOS boot finished								
2	SCOM1	COM1 routing selection: 0 Rear I/O 1 CP305-HDD module								
1	SETH2	Ethernet 2 routing selection: 0 Front I/O 1 Rear I/O								
0	SETH1	Gigabit Ethernet 1 routing selection: 0 Front I/O 1 Rear I/O								

* The default settings of bits 6 and 3 change during the BIOS boot. After bit 3 is set, it can only be cleared by a board reset.



4.3.6 Board ID Register

This register describes the hardware and the board index. The content of this register is unique for each Kontron board.

Table 4-8: Board ID Register

REGISTER NAME	BOARD ID REGISTER								SIZE	
ADDRESS	0x288								8 bits	
BIT POSITION	MSB	7	6	5	4	3	2	1	0	LSB
CONTENT		BID7	BID6	BID5	BID4	BID3	BID2	BID1	BID0	
DEFAULT		1	0	1	0	0	1	1	1	
ACCESS		R	R	R	R	R	R	R	R	
BIT	NAME	DESCRIPTION/FUNCTION								
7 - 0	BID[7:0]	Board ID: 0xA7 CP305								



4.3.7 Board Interrupt Configuration Register

The Board Interrupt Configuration register holds a series of bits defining the interrupt routing for the Watchdog. If the Watchdog Timer fails, it can generate an IRQ5 interrupt.

The enumeration signal is generated by a hot swap compatible board after insertion and prior to removal. The system uses this interrupt signal to force software to configure the new board. The derate signal indicates that the power supply is beginning to derate its power output.

Table 4-9: Board Interrupt Configuration Register

REGISTER NAME		BOARD INTERRUPT CONFIGURATION REGISTER						SIZE			
ADDRESS		0x289						8 bits			
BIT POSITION		MSB	7	6	5	4	3	2	1	0	LSB
CONTENT		Res.	Res.	CFIRQ	CEIRQ	CDIRQ	Res.	WIRQ1	WIRQ0		
DEFAULT		0	0	0	0	0	0	0	0		
ACCESS		R	R	R/W	R/W	R/W	R	R/W	R/W		
BIT	NAME	DESCRIPTION/FUNCTION									
7 - 6	Res.	Reserved									
5	CFIRQ	CPCI fail signal to IRQ5 routing: 0 Disabled 1 Enabled									
4	CEIRQ	CPCI enum signal to IRQ5 routing: 0 Disabled 1 Enabled									
3	CDIRQ	CPCI derate signal to IRQ5 routing: 0 Disabled 1 Enabled									
2	Res.	Reserved									
1 - 0	WIRQ[1:0]	Watchdog interrupt routing: 00 Disabled 01 IRQ5 10 Reserved 11 Reserved									



4.3.8 BIOS Configuration Register

The BIOS Configuration Register holds a series of bits defining the onboard configuration.

Table 4-10: BIOS Configuration Register

REGISTER NAME		BIOS CONFIGURATION REGISTER						SIZE			
ADDRESS		0x28A						8 bits			
BIT POSITION		MSB	7	6	5	4	3	2	1	0	LSB
CONTENT		Res.	Res.	Res.	Res.	Res.	Res.	SATAS	FWHWP		
DEFAULT		0	0	0	0	0	0	0	0		
ACCESS		R	R	R	R	R	R	R/W	R/W		
BIT	NAME	DESCRIPTION/FUNCTION									
7 - 2	Res.	Reserved									
1	SATAS	SATA routing selection: 0 Onboard 1 Rear I/O									
0	FWHWP	Firmware Hub Write Protect: 0 Disable 1 Enable									





4.3.9 LED Control Register

The LED Control Register enables the user to switch on and off the General Purpose LEDs on the front panel.

Table 4-11: LED Control Register

REGISTER NAME	LED CONTROL REGISTER								SIZE	
ADDRESS	0x28D								8 bits	
BIT POSITION	MSB	7	6	5	4	3	2	1	0	LSB
CONTENT		Res.	Res.	Res.	Res.	Res.	Res.	LED1	LED0	
DEFAULT		0	0	0	0	0	0	0	0	
ACCESS		R	R	R	R	R	R	R/W	R/W	
BIT	NAME	DESCRIPTION/FUNCTION								
7 - 2	Res.	Reserved								
1	LED1	LED1 (TH/GP) control settings: 0 LED off 1 LED on								
0	LED0	LED0 (WD/GP) control settings: 0 LED off 1 LED on								



4.3.10 Rear I/O GPIO Register

The Rear I/O GPIO Register controls the General Purpose outputs and holds the status of the General Purpose inputs. This register can only be used if the Rear I/O configuration bits RCFG[1:0] in Table 4-6, I/O Status Register (0x286) are set to “01” (i.e. if the GPIO function is enabled).

Table 4-12: Rear I/O GPIO Register

REGISTER NAME		REAR I/O GPIO REGISTER								SIZE
ADDRESS		0x28E								8 bits
BIT POSITION	MSB	7	6	5	4	3	2	1	0	LSB
CONTENT	GPO2	GPO1	GPO0	GPI4	GPI3	GPI2	GPI1	GPI0		
DEFAULT	0	0	0	1	1	1	1	1		
ACCESS	R/W	R/W	R/W	R	R	R	R	R		
BIT	NAME	DESCRIPTION/FUNCTION								
7	GPO2	GPO2 signal (3.3V TTL): 0 Output low 1 Output high								
6	GPO1	GPO1 signal (3.3V TTL): 0 Output low 1 Output high								
5	GPO0	GPO0 signal (3.3V TTL): 0 Output low 1 Output high								
4	GPI4	GPI4 signal (3.3V TTL): 0 Input low 1 Input high								
3	GPI3	GPI3 signal (3.3V TTL): 0 Input low 1 Input high								
2	GPI2	GPI2 signal (3.3V TTL): 0 Input low 1 Input high								
1	GPI1	GPI1 signal (3.3V TTL): 0 Input low 1 Input high								
0	GPI0	GPI0 signal (3.3V TTL): 0 Input low 1 Input high								

Note ...



The CP305 provides pull-up resistors on the Rear I/O signal pins GPI[4:0] which leads to the default setting “input high” if the inputs are not connected.

The General Purpose Inputs support 3.3V TTL signalling only.



Chapter

5

Power Considerations



This page has been intentionally left blank.





5. Power Considerations

5.1 System Power

The considerations presented in the ensuing chapters must be taken into account by system integrators when specifying the CP305 system environment.

5.1.1 CP305 Baseboard

The CP305 baseboard itself has been designed for optimal power input and distribution. Still it is necessary to observe certain criteria essential for application stability and reliability.

The table below indicates the absolute maximum input voltage ratings that must not be exceeded. Power supplies to be used with the CP305 should be carefully tested to ensure compliance with these ratings.

Table 5-1: Maximum Input Power Voltage Limits

SUPPLY VOLTAGE	MAXIMUM PERMITTED VOLTAGE
+3.3 V	+3.6 V
+5 V	+5.5 V



Warning!

The maximum permitted voltages indicated in the table above must not be exceeded. Failure to comply with the above may result in damage to your board.

The following table specifies the ranges for the different input power voltages within which the board is functional. The CP305 is not guaranteed to function if the board is operated beyond the prescribed limits.

Table 5-2: DC Operational Input Voltage Ranges

INPUT SUPPLY VOLTAGE	ABSOLUTE RANGE	RECOMMENDED RANGE
+3.3 V	3.2 V min. to 3.47 V max.	3.3 V min. to 3.47 V max.
+5 V	4.85 V min. to 5.25 V max.	5.0 V min. to 5.25 V max.



5.1.2 Backplane

Backplanes to be used with the CP305 must be adequately specified. The backplane must provide optimal power distribution for the +3.3 V and +5 V power inputs.

Input power connections to the backplane itself should be carefully specified to ensure a minimum of power loss and to guarantee operational stability. Long input lines, under dimensioned cabling or bridges, high resistance connections, etc. must be avoided. It is recommended to use POSITRONIC or M-type connector backplanes and power supplies where possible.

5.1.3 Power Supply Units

Power supplies for the CP305 must be specified with enough reserve for the remaining system consumption. In order to guarantee a stable functionality of the system, it is recommended to provide more power than the system requires. An industrial power supply unit should be able to provide at least twice as much power as the entire system requires. An ATX power supply unit should be able to provide at least three times as much power as the entire system requires.

As the design of the CP305 has been optimized for minimal power consumption, the power supply unit must be stable even without minimum load.

Where possible, power supplies which support voltage sensing should be used. Depending on the system configuration this may require an appropriate backplane. The power supply should be sufficient to allow for backplane input line resistance variations due to temperature changes, etc.



Note ...

Non-industrial ATX PSUs may require a greater minimum load than a single CP305 is capable of creating. When a PSU of this type is used, it will not power up correctly and the CP305 may hangup. The solution is to use an industrial PSU or to add more load to the system.

The start-up behavior of CPCI and PCI (ATX) power supplies is critical for all new CPU boards. These boards require a defined power sequence and start-up behavior of the power supply. For information on the required behavior refer to the power supply specifications on the formfactors.org web site and to the CompactPCI (PICMG) specification on the picmgeu.org web site.

5.1.3.1 Start-Up Requirement

Power supplies must comply with the following guidelines, in order to be used with the CP305.

- Beginning at 10% of the nominal output voltage, the voltage must rise within > 0.1 ms to < 20 ms to the specified regulation range of the voltage. Typically: > 5 ms to < 15 ms.
- There must be a smooth and continuous ramp of each DC output voltage from 10% to 90% of the regulation band.
- The slope of the turn-on waveform shall be a positive, almost linear voltage increase and have a value from 0 V to nominal V_{out} .





5.1.3.2 Power-Up Sequence

The +5 VDC output level must always be equal to or higher than the +3.3 VDC output during power-up and normal operation.

Both voltages must reach their minimum in-regulation level not later than 20 ms after the output power ramp start.

5.1.3.3 Tolerance

The tolerance of the voltage lines is described in the CPCI specification (PICMG 2.0 R3.0). The recommended measurement point for the voltage is the CPCI connector on the CPU board.

The following table provides information regarding the required characteristics for each board input voltage.

Table 5-3: Input Voltage Characteristics

VOLTAGE	NOMINAL VALUE	TOLERANCE	MAX. RIPPLE (p-p)	REMARKS
5 V	+5.0 VDC	+5%/-3%	50 mV	Main voltage
3.3 V	+3.3 VDC	+5%/-3%	50 mV	Main voltage
+12 V	+12 VDC	+5%/-5%	240 mV	Not required
-12 V	-12 VDC	+5%/-5%	240 mV	Not required
V I/O (PCI) signalling voltage	+3.3 VDC or +5 VDC	+5%/-3%	50 mV	depends on board version
GND	Ground, not directly connected to potential earth (PE)			

The output voltage overshoot generated during the application (load changes) or during the removal of the input voltage must be less than 5% of the nominal value. No voltage of reverse polarity may be present on any output during turn-on or turn-off.



5.1.3.4 Regulation

The power supply shall be unconditionally stable under line, load, unload and transient load conditions including capacitive loads. The operation of the power supply must be consistent even without the minimum load on all output lines.



Warning!

All of the input voltages must be functionally coupled to each other so that if one input voltage fails, all other input voltages must be regulated proportionately to the failed voltage. For example, if the +5V begins to decrease, all other input voltages must decrease accordingly. This is required in order to preclude cross currents within the CP305.

Failure to comply with above may result in damage to the board or improper system operation.



Note ...

If the main power input is switched off, the supply voltages will not go to 0V instantly. It will take a couple of seconds until capacitors are discharged. If the voltage rises again before it went below a certain level, the circuits may enter a latch-up state where even a hard RESET will not help any more. The system must be switched off for at least 3 seconds before it may be switched on again. If problems still occur, turn off the main power for 30 seconds before turning it on again.

5.2 Power Consumption

The goal of this description is to provide a method to calculate the power consumption for the CP305 baseboard and for additional configurations. The GMCH dissipates the majority of the thermal power.

The power consumption tables below list the voltage and power specifications for the CP305 board and the CP305 accessories. The values were measured using an 8-slot passive CompactPCI backplane with two power supplies: one for the CP305 (5V and 3.3V power supply), and the other for the hard disk. The operating systems used were DOS, Linux and Windows® XP. All measurements were conducted at a temperature of 25°C. The measured values varied, because the power consumption was dependent on processor activity.



Note ...

The power consumption values indicated in the tables below can vary depending on the ambient temperature or the system performance. This can result in deviations of the power consumption values of up to 10%.

The power consumption was measured using Intel® Atom™ Processor N270 and under the following testing conditions:

- DOS
With this operating system only one thread was active. This operating system has no power management support and provides a very simple method to verify the measured power consumption values.
- Linux/Windows® XP, IDLE Mode
- CP305 Thermal Design Power (TDP) at 75%
These values represent the “typical” maximum power dissipation reached under OS-controlled applications.



- CP305 Thermal Design Power (TDP) at 100%
These values represent the maximum power dissipation achieved through the use of specific tools to heat up the processor core. 100% TDP is unlikely to be reached in real applications.
- Graphics Benchmarks
These values represent an estimation of the power dissipation of a graphical working load.

The following tables indicate the power consumption with 2 GB DDR2 SDRAM. For measurements made with the Linux and Windows® XP operating systems, the VGA resolution was 1280 x 1024 pixels.

Table 5-4: Power Consumption: CP305 with DOS

POWER	INTEL® ATOM™ PROCESSOR N270
5 V	5.8 W
3.3 V	2.3 W
Total	8.1 W

Table 5-5: Power Consumption: CP305 with Linux / Win.® XP in IDLE Mode

POWER	INTEL® ATOM™ PROCESSOR N270
5 V	5.1 W
3.3 V	2.6 W
Total	7.7 W

Table 5-6: Power Consumption: CP305 TDP at 75%

POWER	INTEL® ATOM™ PROCESSOR N270
5 V	6.0 W
3.3 V	2.6 W
Total	8.6 W

Table 5-7: Power Consumption: CP305 TDP at 100%

POWER	INTEL® ATOM™ PROCESSOR N270
5 V	6.3 W
3.3 V	2.6 W
Total	8.9 W

Table 5-8: Power Consumption: CP305 Graphics Benchmarks

POWER	INTEL® ATOM™ PROCESSOR N270
5 V	6.3 W
3.3 V	5.2 W
Total	11.5 W



5.3 Power Consumption of CP305 Accessories

The following table indicates the power consumption of the CP305 accessories.

Table 5-9: Power Consumption of CP305 Accessories

MODULE	POWER 5 V	POWER 3.3 V AVERAGE
CompactFlash	—	100 mW - 300 mW
Gigabit Ethernet (per interface)	—	800 mW

5.4 Start-Up Currents of the CP305

The following table indicates the start-up currents of the CP305 during the first 2-3 seconds after the power supply has been switched on. The power consumption of the CP305 during operation is indicated in tables 5-4 to 5-8.

Table 5-10: Start-Up Currents of the CP305

POWER		INTEL® ATOM™ PROCESSOR N270
5 V	peak	6.8 A
	average	0.4 A
3.3 V	peak	3.6 A
	average	0.5 A

For further information on the start-up current, please contact Kontron.





Chapter

6

Thermal Considerations



This page has been intentionally left blank.





6. Thermal Considerations

The following chapters provide system integrators with the necessary information to satisfy thermal requirements when implementing CP305 applications.

6.1 Board Internal Thermal Regulation

The thermal management architecture implemented on the CP305 can be described as being two separate but related functions. The goal of these functions is to protect the processor and the chipset. Enabling the thermal control circuit allows the processor and the chipset to maintain a safe operating temperature without the need for special software drivers or interrupt handling routines.

The two thermal protection functions provided by the processor and the chipset are:

1. Intel® Atom™ Processor N270 Thermal Supervision

This function controls the processor temperature by SpeedStep® or clock modulation via the internal Digital Thermal Sensor (DTS).

2. Thermtrip:

In the event of a catastrophic cooling failure resulting in extreme overheating, the processor and/or the 945GSE Express GMCH will automatically shut down when the die temperature has reached approximately 125°C. This event is known as “Thermtrip”.

6.1.1 CPU Internal Thermal Supervision

The CPU Thermal Monitor Function can be enabled and disabled in the BIOS whereby the default value is: enabled. When the internal thermal control circuit has been enabled and a high temperature situation occurs, the internal clocks are controlled by SpeedStep®. If this is not sufficient, the clock is additionally modulated by alternately turning it off and on with a 50% duty cycle. This results in the reduction of the processor and the chipset power consumption and the system performance depending on the active SpeedStep® and the duty cycle. The thermal control circuit is automatically deactivated when the temperature goes below the internal thermal supervision point. The internal temperature sensors are located near to the hottest area of the processor die. The processor is individually calibrated during manufacturing to eliminate any potential manufacturing variations.



Note ...

The duty cycle and the internal thermal supervision point is factory configured by Intel and cannot be modified. For the Intel® Atom™ Processor N270 the internal thermal supervision point is 90°C.



Note ...

If the Thermal Supervision Point has been exceeded, the front panel overtemperature LED (TH LED) is lit regardless of whether it is enabled or disabled in the BIOS.



6.1.2 CPU Emergency Thermal Supervision (Thermtrip)

This function cannot be enabled or disabled in the BIOS. It is always enabled to ensure that the processor and the chipset are protected in any event.

Assertion of Thermtrip indicates that the processor or the chipset junction temperature has reached a level beyond which permanent silicon damage may occur. Measurement of the temperature is accomplished through an internal thermal sensor which is configured to trip at approximately 125°C. Upon assertion of Thermtrip, the processor will shut off its internal clocks (thus halting program execution) in an attempt to reduce the processor and the chipset junction temperature. Once activated, Thermtrip remains latched until the CP305 undergoes a cold re-start (all power off and then on again).



Note ...

Upon assertion of Thermtrip, the front panel overtemperature LED (TH LED) flashes at regular intervals regardless of whether it is enabled or disabled in the BIOS.

6.1.3 Thermal Management Recommendations

If the CP305 is operated in a properly configured CompactPCI environment with enough airflow, there is no need to enable the Thermal Management function. However, sometimes the system environment is not optimized for CP305 and this requires thermal protection to guarantee a stable system. The Thermal Management feature allows system designers to design lower cost thermal solutions without compromising system integrity or reliability.

If the system environment is not optimized for the CP305, the internal Thermal Monitor should be enabled. The internal Thermal Monitor protects the processor, the chipset and the system against excessive temperatures.



Warning!

For Benchmarks and performance tests the internal Thermal Supervision should be disabled; if enabled, the results will be erroneous due to the processor performance reduction .

6.2 External Thermal Regulation

When developing applications using the CP305, the system integrator must be aware of the overall system thermal requirements. System chassis must be provided which satisfy these requirements.

The thermal management concept of the CP305 also encompasses external thermal regulation. For the processor and the chipset, a specifically designed heat sink is employed to ensure the best possible basis for operational stability and long-term reliability.

The heat sink is optimized for both convection and forced airflow cooling. In the standard temperature range of 0 to 60°C, the board can also be operated without forced airflow. When the board is operated in the extended temperature range, forced airflow is required which must be provided by the CompactPCI system.





For determining the operational limits of the CP305, various measurements have been made using typical applications running under Linux/Windows® XP. In worst case situations, the values vary and the temperature range must be reduced. In all situations, the maximum case temperature of the processor and the chipset must be kept below the maximum allowable temperature. The processor includes an integrated sensor for measuring the processor temperature. To ensure functionality at the maximum temperature, the BIOS supports a temperature control feature. In instances of overtemperature, the processor will reduce the power consumption. The maximum case temperatures for the Intel® Atom™ Processor N270 is 90°C.

For information regarding the operational temperature of the CP305 when operated with convection cooling, refer to Chapter 6.2.1, Convection Cooling. For information regarding the operational temperature of the CP305 operated with forced airflow, refer to Chapter 6.2.2, Forced Airflow.

6.2.1 Convection Cooling

The CP305 can also be employed in applications cooled by natural convection only. In order to ensure maximum cooling efficiency, the CP305 must be installed vertically in the chassis or application. To allow the air to freely flow around the heat sink, it is necessary to avoid air trapping above the CP305. Airflow trapping can occur, for example, by using a closed chassis, filter pads, etc. If the above-mentioned conditions are met, an ambient temperature of up to 60°C at 100% thermal design power (TDP) may be used. At an increased graphics load, it may be necessary to reduce the ambient temperature.

6.2.2 Forced Airflow

For determining the operational limits of the CP305 operated with forced airflow, one thermal characteristic graph is provided which illustrates the maximum ambient air temperature as a function of the volumetric airflow rate for the power consumption indicated. The diagram is intended to serve as guidance for reconciling board and system with the required computing power considering the thermal aspect. There are up to two curves representing upper level working points based on different levels of average processor utilization. When operating below the corresponding curve, the processor runs steadily without any intervention of thermal supervision. When operated above the corresponding curve, various thermal protection mechanisms may take effect resulting in temporarily reduced processor performance or finally in an emergency stop in order to protect the processor from thermal destruction. In real applications this means that the board can be operated temporarily at a higher ambient temperature or at a reduced flow rate and still provide some margin for temporarily requested peak performance before thermal protection will be activated.

TDP curves

- 100% TDP curve
This load complies with the maximum thermal design power (TDP) indicated in Chapter 5.2 Power Consumption, Table 5-7. 100% TDP can be achieved through the use of specific tools to heat up the CPU but 100% TDP is unlikely to be reached in real applications.
- 75% TDP curve
This load represents a "typical" maximum power dissipation reached under OS-controlled applications. Typically, this load corresponds with 75% of the TDP (see Chapter 5.2 Power Consumption, Table 5-6).



How to read the diagram

Choose a specific working point on the diagram. For a given flow rate there is a maximum air-flow input temperature (= ambient temperature) provided. Below this operating point, thermal supervision will not be activated. Above this operating point, thermal supervision will become active protecting the processor from thermal destruction. The minimum airflow rate provided must not be less than the value specified in the diagram.

Volumetric flow rate

The volumetric flow rate refers to an airflow through a fixed cross-sectional area (i.e. slot width x depth). The volumetric flow rate is specified in m³/h (cubic-meter-per-hour) or cfm (cubic-feet-per-minute) respectively.

Conversion: 1 cfm = 1.7 m³/h; 1 m³/h = 0.59 cfm

Airflow

At a given cross-sectional area and a required flow rate, an average, homogeneous airflow speed can be calculated using the following formula:


$$\text{Airflow} = \text{Volumetric flow rate} / \text{area.}$$

The airflow is specified in m/s = meter-per-second or in fps = feet-per-second, respectively.

Conversion: 1 fps = 0.3048 m/s; 1 m/s = 3.28 fps

The following figures illustrate the operational limits of the CP305 taking into consideration power consumption vs. ambient air temperature vs. airflow rate. The measurements were made based on a 4HP slot.

Figure 6-1: Operational Limits for the CP305 Operated in Extended Temp. Range

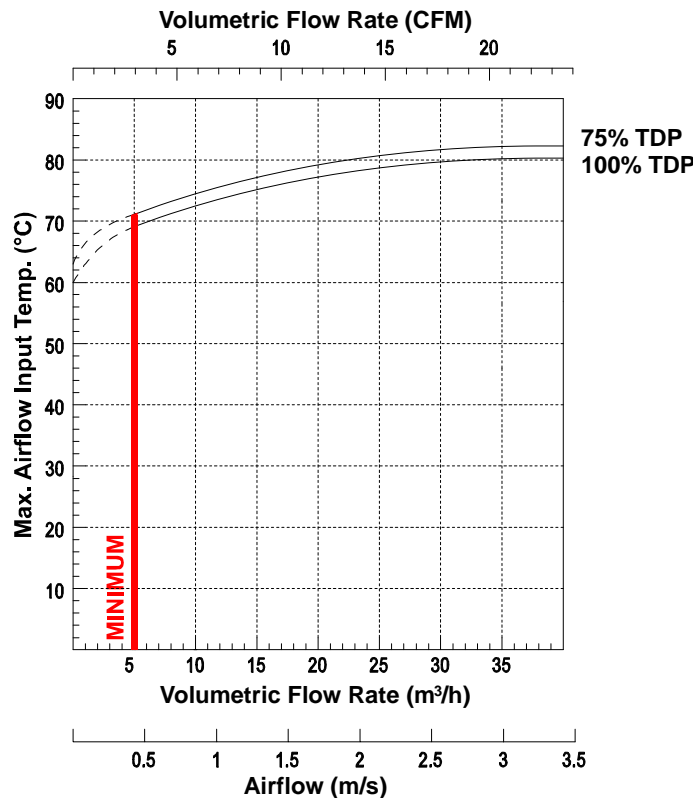

**Note ...**

The diagram illustrated in Figure 6-1 is valid for a vertically installed CP305.

Standard *Kontron* ASM racks (3U CompactPCI rack with a 1U cooling fan tray) are able to provide an airflow of up to 2.5 m/s. For other racks or housings the available airflow will differ. The maximum ambient operating temperature must be recalculated and/or measured for such environments. For the calculation of the maximum ambient operating temperature, the processor junction temperature must never exceed the specified limit for the involved processor type.

6.2.3 Peripherals

When determining the thermal requirements for a given application, peripherals to be used with the CP305 must also be considered. Devices such as hard disks, extension modules, etc. which are directly attached to the CP305 must also be capable of being operated at the temperatures foreseen for the application. It may very well be necessary to revise system requirements to comply with operational environment conditions. In most cases, this will lead to a reduction in the maximum allowable ambient operating temperature or even require active cooling of the operating environment.

**Warning!**

As Kontron assumes no responsibility for any damage to the CP305 or other equipment resulting from overheating of the processor, it is highly recommended that system integrators as well as end users confirm that the operational environment of the CP305 complies with the thermal considerations set forth in this document.



This page has been intentionally left blank.






Appendix **A**

CP305-HDD



This page has been intentionally left blank.





A. CP305-HDD Module

A.1 Overview

The Kontron CP305-HDD module has been designed to include a COM port, a PS/2 keyboard and mouse port, a SATA hard disk interface, and standard IDE interface, two USB 2.0 interfaces, a CompactFlash socket, a DVI-D flat panel interface, a PLCC FWH Flash socket and a battery socket. The CP305-HDD module extends the CP305 version from 4 HP to 8 HP. This additional capability opens up the broadest range of expansion possibilities.

The connectors for the COM port, the PS/2 keyboard and mouse, the USB ports, and the DVI-D port are situated at the front panel, while the SATA hard disk, the CompactFlash socket, and the IDE connectors are onboard connectors. The module connects to the CP305 via I/O extension connectors.

The PLCC FWH Flash socket provides a boot option to the CP305 and can be selected via jumper J1.

The battery socket on the CP305-HDD module has the same function as the battery socket on the CP305.





Note ...

If a CP305-HDD module is used on the CP305, either the CP305 or the CP305-HDD module may be equipped with a battery.

Using one battery on the CP305 and one on the CP305-HDD module simultaneously may result in premature discharge of the batteries.

A.2 Technical Specifications


Table A-1: CP305-HDD Module Main Specifications

CP305-HDD		SPECIFICATIONS
External Interfaces	Keyboard and Mouse Interface	PS/2 type, 6-pin, shielded mini-DIN connector for the keyboard and mouse (via Y-cable)
	Serial Port	One 16C550 compatible serial port (COM1), RS-232; 9-pin D-Sub connector
	USB	Two USB 2.0 interfaces
	DVI-D	One DVI-D interface, digital signals only
Internal Interfaces	IDE Interface (PATA)	One IDE interface supporting hard disks or CD/DVD drives on 40-pin, 2.54 mm, onboard connector (only one slave device if CF is installed)
	SATA	SATA interface supporting one 2.5" hard disk drive
	CompactFlash	One CompactFlash, True IDE with DMA (IDE master only)
	PLCC Flash	One PLCC Flash, 32-pin socket providing optional boot
Indicators/ Switches	HDD LED	One LED (green) monitors SATA hard disk activity
	Front Panel Switch	Reset button, guarded
General	Power Consumption	Power consumption without hard disk and without peripheral devices connected: 100 mA at 3.3 V 40 mA at 5.0 V
	Temperature Range	Operational: 0°C to +60°C Standard -40°C to +80°C Extended (without hard disk and in the appropriate system environment) Storage: -55°C to +85°C Without hard disk and without battery -40°C to +65°C With hard disk  Note ... When a battery is installed, refer to the operational specifications of the battery as this determines the storage temperature of the CP305-HDD module (See "Battery" below).  Note ... When additional components are installed, refer to their operational specifications as this will influence the board's operational and storage temperature.
	Climatic Humidity	93% RH at 40°C, non-condensing (acc. to IEC 60068-2-78)
	Dimensions	Dimensions: 100 mm x 150 mm
	Board Weight	8 HP CP305 with CP305-HDD and heat sink: 540 grams (with mounted 2.5" HDD)
	Battery	3.0V lithium battery for RTC with battery socket. Recommended type: CR2025 Temperature ranges: Operational: -20°C to +70°C typical (refer to the battery manufacturer's specifications for exact range) Storage: -55°C to +70°C typical (no discharge)




A.3 CP305-HDD Module Functional Block Diagram

Figure A-1: CP305-HDD Module Functional Block Diagram

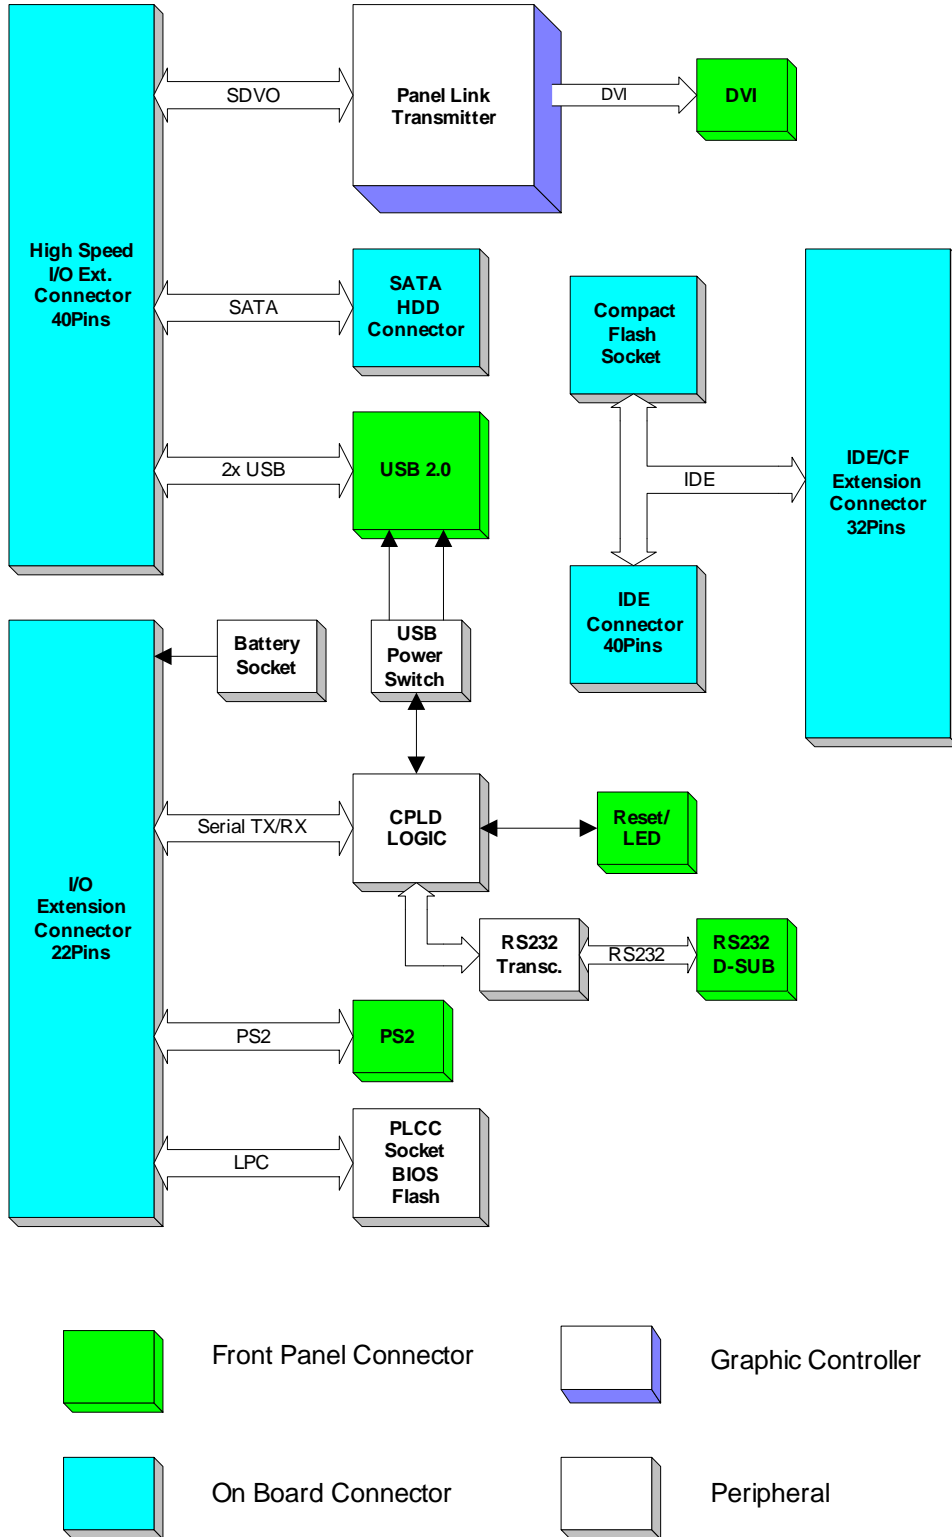

A.4 Front Panel of 8HP CP305 for CP305-HDD Module

Figure A-2: Front Panel of 8HP CP305 with CP305-HDD Module

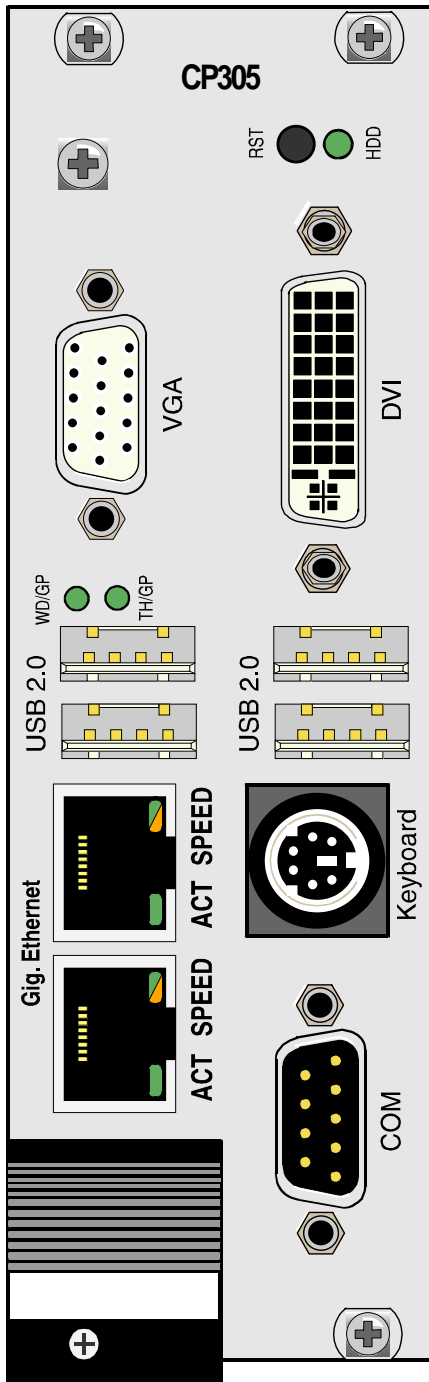

LEGEND:

CP305: 8HP version

General Purpose LEDs:

WD/GP (green): Watchdog or General Purpose; when lit during power-on, it indicates a PCI reset is active.

TH/GP (green): Overtemperature Status or General Purpose; when lit during power-on, it indicates a power failure.

HDD (green): Monitors SATA hard disk activity



Note ...

If the TH LED and the WD LED keep flashing during BIOS initialization, a POST code is indicated.

For further information, please contact Kontron.

Integral Ethernet LEDs:

ACT (green): Ethernet Link/Activity

SPEED (green/orange): Ethernet Speed

SPEED ON (orange): 1000 Mbit

SPEED ON (green): 100 Mbit

SPEED OFF: 10 Mbit



A.5 CP305-HDD Module Layout

Figure A-3: CP305-HDD Module Layout (Top View)


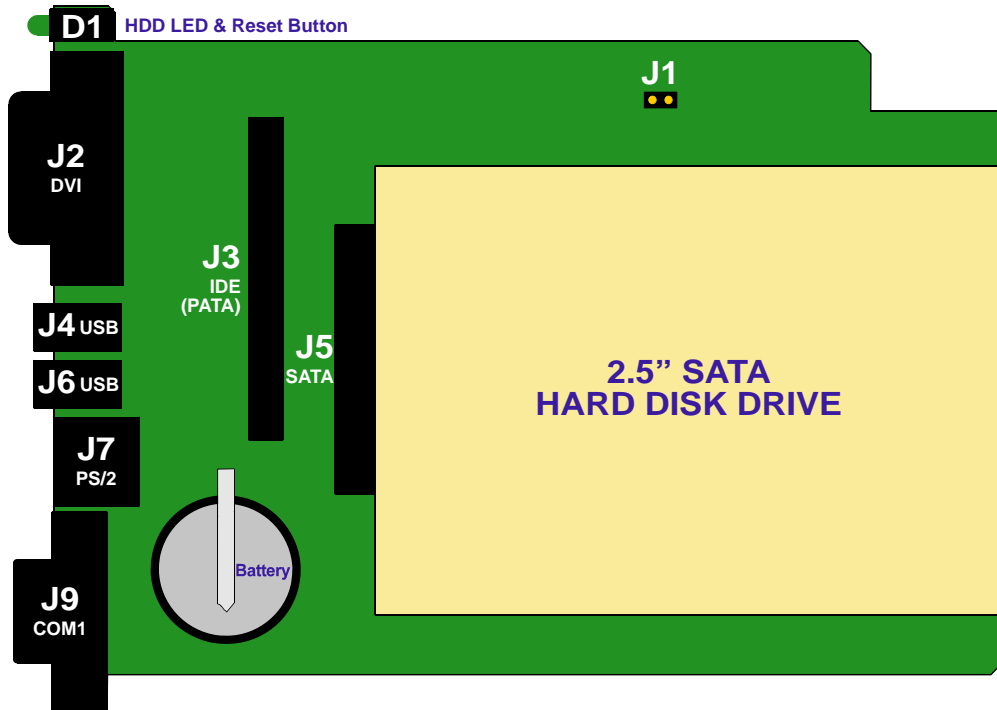


Figure A-4: CP305-HDD Module Layout (Bottom View)



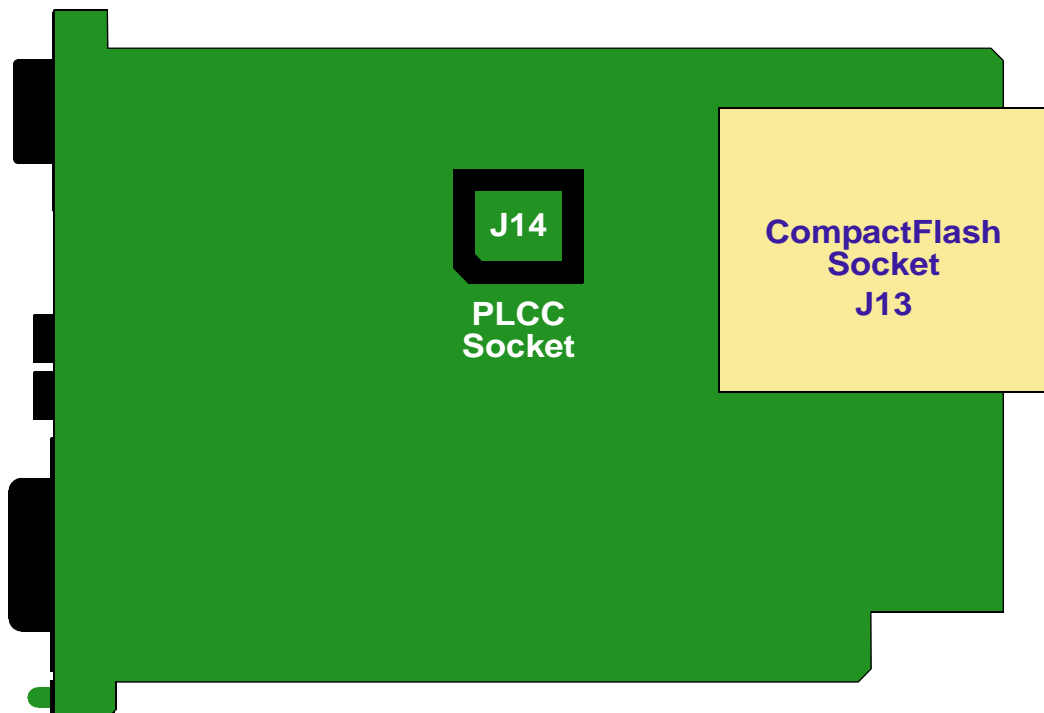

A.6 Module Interfaces (Front Panel and Onboard)

A.6.1 Keyboard/Mouse Interface

The keyboard controller is located on the CP305 and is 8042 software compatible.





Figure A-5: Keyboard/Mouse Connector

The PC/AT standard keyboard/mouse connector is a PS/2-type 6-pin shielded Mini-DIN connector.

A special adapter to connect a mouse device and/or a keyboard to the PS/2 connector is available from *Kontron*.

Figure A-6: Adapter for Connecting Mouse/Keyboard via PS/2

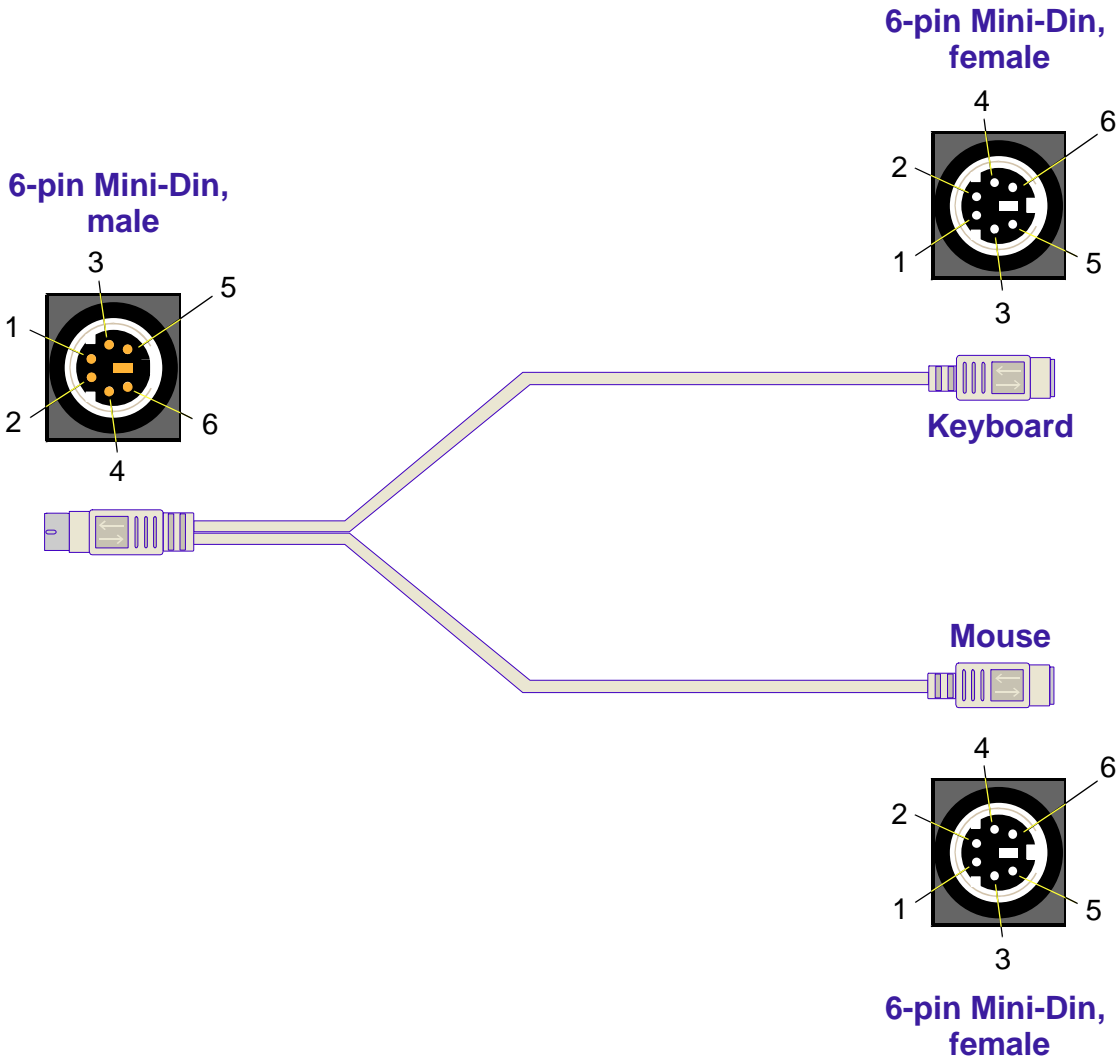

The CP305 has the AT keyboard connector implemented on a 6-pin Mini-Din connector.

Figure A-7: Keyboard Connector J7 Pinout

PIN	SIGNAL	DESCRIPTION	I/O
1	KDATA	Keyboard data	I/O
2	MDATA	Mouse data	I/O
3	GND	Ground signal	--
4	VCC	VCC signal	--
5	KCLK	Keyboard clock	I/O
6	MCLK	Mouse clock	I/O



Note ...

The PS/2 power supply provides short-circuit protection and all the signal lines are EMI-filtered.

A.6.2 Universal Serial Port

One PC-compatible serial RS-232, 9-pin D-Sub port is available which is fully compatible with the 16C550 controller. This port includes a complete set of handshaking and modem control signals. Data transfer rates up to 115.2 kB/s are supported.

The COM1 interface is routed to the serial port connector J9.

Figure A-8: Serial Port Con. J9




Table A-2: Serial Port Con. J9 Pinout

PIN	SIGNAL	DESCRIPTION	I/O
1	DCD	Data carrier detect	I
2	RXD	Receive data	I
3	TXD	Transmit data	O
4	DTR	Data terminal ready	O
5	GND	Signal ground	--
6	DSR	Data send request	I
7	RTS	Request to send	O
8	CTS	Clear to send	I
9	RI	Ring indicator	I



A.6.3 USB Interfaces

The CP305-HDD provides two standard USB 2.0 ports on J4 and J6.

The CP305-HDD supports two USB 2.0 ports. The USB 2.0 ports are high-speed, full-speed, and low-speed capable. Hi-speed USB 2.0 allows data transfers of up to 480 Mb/s - 40 times faster than a full-speed USB (USB 1.1).

One USB peripheral may be connected to each port. To connect more USB devices than there are available ports, an external hub is required.

Figure A-9: USB Connectors J4 and J6




Table A-3: USB Connectors J4 and J6 Pinout

PIN	SIGNAL	FUNCTION	I/O
1	VCC	VCC	--
2	UV0-	Differential USB-	I/O
3	UV0+	Differential USB+	I/O
4	GND	GND	--



Note ...

The CP305-HDD host interfaces can be used with maximum 500 mA continuous load current as specified in the Universal Serial Bus Specification, Revision 2.0. Short-circuit protection is provided. All the signal lines are EMI-filtered.






A.6.4 DVI-D Interface

The CP305-HDD provides one standard DVI-D interface, J2, which is a digital signal only interface with device detection.

Figure A-10: DVI-D Connector J2

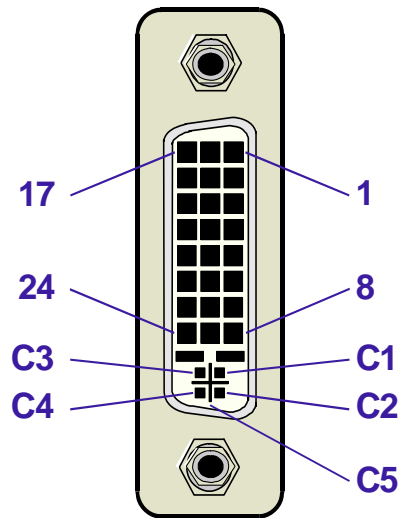

The following table indicates the pinout of the DVI-D Connector J2.

Table A-4: DVI-D Connector J2 Pinout

PIN	SIGNAL	DESCRIPTION	I/O	PIN	SIGNAL	DESCRIPTION	I/O
1	TMDS Data 2-	TMDS* Link -	O	2	TMDS Data 2+	TMDS* Link +	O
3	GND	Ground	--	4	NC	Not connected	--
5	NC	Not connected	--	6	DDC Clock	I ² C™ Clock	O
7	DDC Data	I ² C™ Data	I/O	8	NC	Not connected	--
9	TMDS Data 1-	TMDS Link -	O	10	TMDS Data 1+	TMDS Link +	O
11	GND	Ground	--	12	NC	Not connected	--
13	NC	Not connected	--	14	VCC	Power +5 V, 1.5A fused	--
15	GND	Ground	--	16	HPDETECT	Hot Plug Detect	I
17	TMDS Data 0-	TMDS Link -	O	18	TMDS Data 0+	TMDS Link +	O
19	GND	Ground	--	20	NC	Not connected	--
21	NC	Not connected	--	22	GND	Ground	--
23	TMDS Clock +	TMDS Link +	O	24	TMDS Clock -	TMDS Link -	O
C1	NC	Not connected	--	C2	NC	Not connected	--
C3	NC	Not connected	--	C4	NC	Not connected	--
C5	GND	Ground	--				

* TMDS = Transition Minimized Differential Signaling



A.6.5 IDE Interface (PATA)

The IDE interface on the CP305-HDD module is comprised of the connector J3 and the CompactFlash socket. The J3 connector is used to connect external devices to the CP305-HDD module.

J3 is a standard 40-pin 2.54mm pinrow connector. Up to two devices (which must be master/slave pairs) may be attached to the CP305-HDD board.



Note ...

Only one external IDE slave device may be connected to the IDE connector J3 if a CompactFlash card is installed. This is due to the fact that an installed CompactFlash card is always configured as IDE master.



Note ...

ATA-66 and ATA-100 are faster timings and require a specialized cable which has additional grounding wires to reduce reflections, noise, and inductive coupling. Please contact Kontron for further information.

A wide range of IDE devices may be connected to the CP305-HDD module at J3 using a ribbon cable. The following table describes the pinout of connector J3.

Table A-5: Pinout of IDE Connector J3

I/O	DESCRIPTION	SIGNAL	PIN	PIN	SIGNAL	DESCRIPTION	I/O
O	Reset HD	IDERESET	1	2	GND	Ground signal	--
I/O	HD data 7	HD7	3	4	HD8	HD data 8	I/O
I/O	HD data 6	HD6	5	6	HD9	HD data 9	I/O
I/O	HD data 5	HD5	7	8	HD10	HD data 10	I/O
I/O	HD data 4	HD4	9	10	HD11	HD data 11	I/O
I/O	HD data 3	HD3	11	12	HD12	HD data 12	I/O
I/O	HD data 2	HD2	13	14	HD13	HD data 13	I/O
I/O	HD data 1	HD1	15	16	HD14	HD data 14	I/O
I/O	HD data 0	HD0	17	18	HD15	HD data 15	I/O
--	Ground signal	GND	19	20	NC	KEY	--
I	DMA request	IDEDRQ	21	22	GND	Ground signal	--
O	I/O write	IOW	23	24	GND	Ground signal	--
O	I/O read	IOR	25	26	GND	Ground signal	--
I	I/O channel ready	IOCHRDY	27	28	CSEL	Cable select	I/O
O	DMA Ack	IDEDACKA	29	30	GND	Ground signal	--
I	Interrupt request	IDEIRQ	31	32	IOCS16	Obsolete	I/O
O	Address 1	A1	33	34	PDIAG#/ CBLID#*	Detect ATA100	I
O	Address 0	A0	35	36	A2	Address 2	O
O	HD select 0	HCS0	37	38	HCS1	HD select 1	O
I	LED driving	LED	39	40	GND	Ground signal	--

* Signal terminated with 10 kΩ pull-down resistor



A.6.6 CompactFlash Socket

To enable flexible flash extension, a CompactFlash (CF) type II socket, J13, is available on the CP305-HDD.

CompactFlash is a very small removable mass storage device. It provides true IDE functionality compatible with the 16-bit ATA/ATAPI-4 interface.

The CompactFlash socket is connected to the IDE port of the ICH7-M and is set to master configuration.

The CP305 supports DMA and both CF type I and CF type II.



Note ...

An installed CompactFlash card is always configured as IDE master. For this reason, only one additional external IDE slave device may be connected to the CP305-HDD if a CompactFlash card is installed.

The following table provides the pinout for the CompactFlash connector J13.

Table A-6: CompactFlash Connector J13 Pinout

I/O	FUNCTION	SIGNAL	PIN	PIN	SIGNAL	FUNCTION	I/O
--	Ground Signal	GND	1	2	D03	Data 3	I/O
I/O	Data 4	D04	3	4	D05	Data 5	I/O
I/O	Data 6	D06	5	6	D07	Data 7	I/O
O	Chip Select 0	IDE_CS0	7	8	GND (A10)	--	--
--	--	GND (ATASEL)	9	10	GND (A09)	--	--
--	--	GND (A08)	11	12	GND (A07)	--	--
--	Power 5 V	VCC	13	14	GND (A06)	--	--
--	--	GND (A05)	15	16	GND (A04)	--	--
--	--	GND (A03)	17	18	A02	Address 2	O
O	Address 1	A01	19	20	A00	Address 0	O
I/O	Data 0	D00	21	22	D01	Data 1	I/O
I/O	Data 2	D02	23	24	IOCS16	Obsolete	I/O
--	--	NC (CD2)	25	26	NC (CD1)	--	--
I/O	Data 11	D11	27	28	D12	Data 12	I/O
I/O	Data 13	D13	29	30	D14	Data 14	I/O
I/O	Data 15	D15	31	32	IDE_CS1	Chip Select 1	O
--	--	NC (VS1)	33	34	IORD	I/O Read	O
O	I/O Write	IOWR	35	36	VCC (WE)	Power 5 V	--
I	Interrupt Request	INTRQ	37	38	VCC	Power 5 V	--
O	Master/Slave	CSEL (GND/pull-up)	39	40	NC (VS2)	--	--
O	Reset	Reset	41	42	IORDY	I/O Ready	I
I	DMA Request	DMARQ	43	44	DMACK	DMA Acknowledge	O
I/O	Drive Active Slave Present	DASP	45	46	PDIAG#/ CBLID#*	--	--
I/O	Data 08	D08	47	48	D09	Data 09	I/O
I/O	Data 10	D10	49	50	GND	Ground Signal	--

* Signal terminated with 10 k Ω pull-down resistor



Note ...

The CompactFlash socket on the CP305-HDD supports all available CompactFlash cards type I and type II with 5 V power supply.



A.6.7 SATA Interface

The SATA connector, J5, on the CP305-HDD module is provided for connecting a 2.5" SATA HDD to the CP305-HDD module. The SATA connector is divided into two segments, a signal segment and a power segment.

Figure A-11: SATA Connector J5

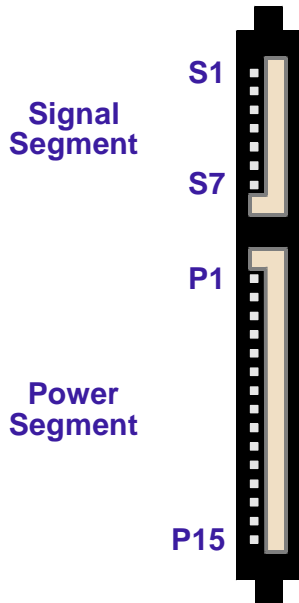


Table A-7: SATA Connector J5 Pinout

PIN	SIGNAL	FUNCTION	I/O
Signal Segment Key			
S1	GND	Ground signal	--
S2	SATA_TX+	Differential Transmit+	O
S3	SATA_TX-	Differential Transmit-	O
S4	GND	Ground signal	--
S5	SATA_RX-	Differential Receive-	I
S6	SATA_RX+	Differential Receive+	I
S7	GND	Ground signal	--
Signal Segment "L"			
Central Connector Polarizer			
Power Segment "L"			
P1	3.3V	3.3V power	--
P2	3.3V	3.3V power	--
P3	3.3V	3.3V power	--
P4	GND	Ground signal	--
P5	GND	Ground signal	--
P6	GND	Ground signal	--
P7	5V	5V power	--
P8	5V	5V power	--
P9	5V	5V power	--
P10	GND	Ground signal	--
P11	RES	Reserved	--
P12	GND	Ground signal	--
P13	NC (12V)	Not connected	--
P14	NC (12V)	Not connected	--
P15	NC (12V)	Not connected	--
Power Segment Key			



A.6.8 PLCC Socket

A 32-pin PLCC socket, J14, is available for installing a FWH flash on the CP305-HDD module. This flash can be used for booting the CP305 in case of a crash of the onboard firmware hub flash. The jumper J1 must be set prior to applying power to the system in order to boot the CP305 from the FWH flash on the CP305-HDD module.

A.6.9 Battery

The CP305-HDD is provided with a 3.0 V “coin cell” lithium battery for the RTC. For further information concerning the battery and its replacement, refer to Chapter 3.5.3, Battery Replacement.



Note ...

If a CP305-HDD module is used on the CP305, either the CP305 or the CP305-HDD module may be equipped with a battery.

Using one battery on the CP305 and one on the CP305-HDD module simultaneously may result in premature discharge of the batteries.



Note ...

The user must be aware that the battery’s operational temperature range is less than the board’s storage temperature range.

For exact range information, refer to the battery manufacturer’s specifications.




Appendix **B**

CP305-TR



This page has been intentionally left blank.





B. CP305-TR Module

B.1 Overview

The Kontron CP305-TR module has been designed for use in mobile- and transportation-oriented applications where robust, mechanically secured connections are required. It includes two Fast Ethernet ports via M12, D-coded connectors, two USB 2.0 service ports via M8, A-coded connectors and three GPO LEDs on the front panel as well as two onboard COM ports, one onboard GPIO port, one CompactFlash socket, two onboard SATA ports for connection to external SATA devices and one CompactPCI connector for connecting the CP305-TR to the backplane. The module connects to the CP305 via an I/O extension connector.

The CP305-TR is equipped with one jumper for selection between the second COM port and the GPIO port and provides conformal coating and optional cable fixation for the SATA cables.

Furthermore, a battery socket is available on the CP305-TR. The battery socket on the CP305-TR module has the same function as the battery socket on the CP305.



Note ...

If a CP305-TR module is used on the CP305, either the CP305 or the CP305-TR module may be equipped with a battery.

Using one battery on the CP305 and one on the CP305-TR module simultaneously may result in premature discharge of the batteries.

Backplane Requirements

In order to use the CP305-TR, a rear I/O-configured CP305 board and a 32-bit, special 3U CompactPCI backplane with adjacent slot communication at the CompactPCI connector J2 such as the Kontron CP3-BP4.5-M are required.





Warning!

Do not plug a CP305 with a CP305-TR module installed into a backplane with 64-bit PCI bus or into a backplane that does not meet the requirements mentioned above.

Failure to comply with this instruction may result in damage to your board.

B.2 Technical Specifications


Table B-1: CP305-TR Module Main Specifications

CP305-TR		SPECIFICATIONS
External Interfaces	Ethernet	Two Fast Ethernet interfaces implemented as a two M12 D-coded connectors, J11 and J12
	USB	Two USB 2.0 interfaces implemented as two M8 A-coded connectors, J6 and J7
Internal Interfaces	Serial	Two onboard serial ports (COM 1 and COM2) implemented as two 10-pin, 2.54 mm connector, J4 and J1
	SATA	Two SATA II interfaces (with SATA II repeater) implemented as two onboard connectors, J8 and J10, for connecting external SATA devices via a SATA cable
	CompactFlash	One CompactFlash socket, True IDE with DMA (IDE master only), 5 V power supply
	GPIO	One 10-pin general purpose I/O connector, J5, with the following features: <ul style="list-style-type: none"> • Five general purpose inputs • Three general purpose outputs
	CompactPCI	One CompactPCI connector, J2, for connecting the CP305-TR to the backplane
Indicators /Switches	LEDs	Three status GPO LEDs indicating general purpose outputs
	Jumper	One jumper, JP1, for switching between the second COM port (COM2) and the GPIO port
General	Power Consumption	Power consumption without CompactFlash and without peripheral devices connected: 80 mA at 3.3 V 40 mA at 5.0 V
	Temperature Range	Operational: 0°C to +60°C Standard -40°C to +80°C Extended Storage: -55°C to +85°C Without battery  <p>Note ... When a battery is installed, refer to the operational specifications of the battery as this determines the storage temperature of the CP305-TR module (See "Battery" below).</p>  <p>Note ... When additional components are installed, refer to their operational specifications as this will influence the board's operational and storage temperature.</p>
	Climatic Humidity	93% RH at 40°C, non-condensing (acc. to IEC 60068-2-78)
	Dimensions	Dimensions: 100 mm x 160 mm
	Board Weight	8HP CP305 with CP305-TR module and heat sink: 490 grams
	Battery	3.0V lithium battery for RTC with battery socket. Recommended type: CR2025 Temperature ranges: Operational: -20°C to +70°C typical (refer to the battery manufacturer's specifications for exact range) Storage: -55°C to +70°C typical (no discharge)




B.3 CP305-TR Module Functional Block Diagram

Figure B-1: CP305-TR Module Functional Block Diagram

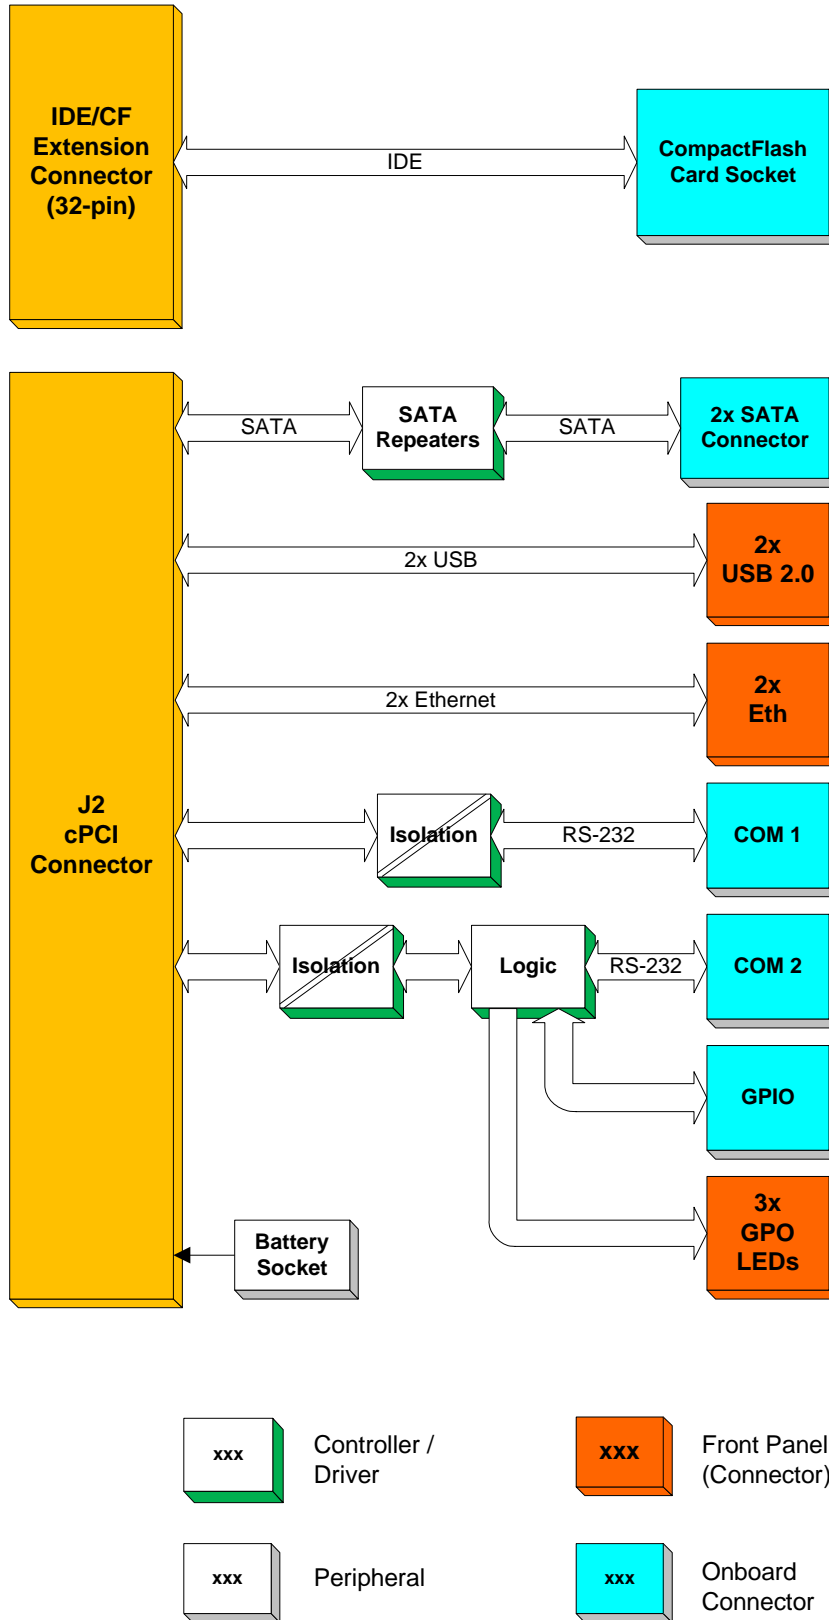

B.4 Front Panel of 8HP CP305 for CP305-TR Module

Figure B-2: Front Panel of 8HP CP305 with CP305-TR Module

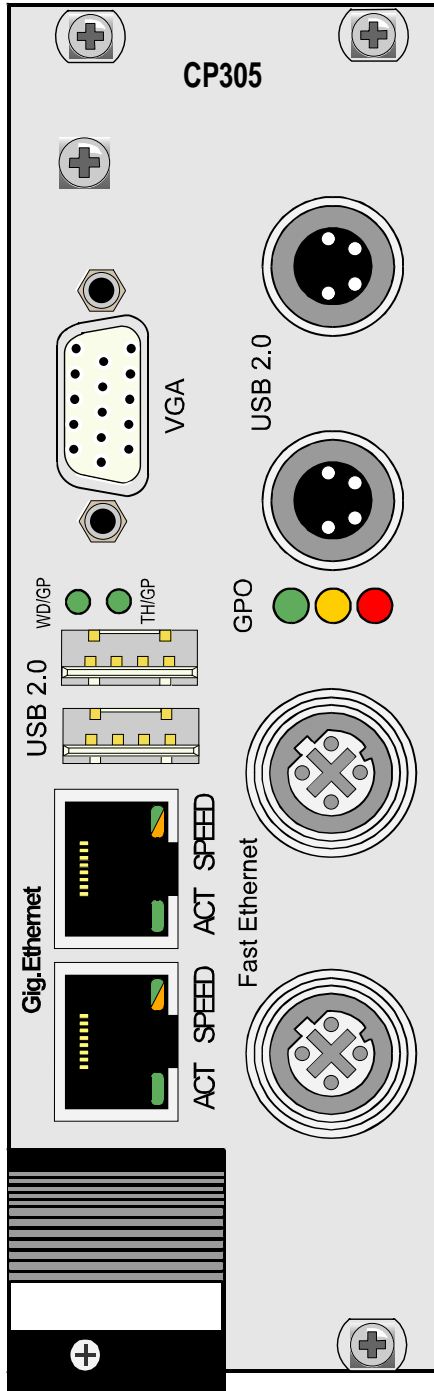

LEGEND:

CP305: 8HP version

General Purpose LEDs:

WD/GP (green): Watchdog or General Purpose; when lit during power-on, it indicates a PCI reset is active.

TH/GP (green): Overtemperature Status or General Purpose; when lit during power-on, it indicates a power failure.

General Purpose Output LEDs:

GPO0 (red): Indicates general purpose output

GPO1 (yellow): Indicates general purpose output

GPO2 (green): Indicates general purpose output



Note ...

If the TH LED and the WD LED keep flashing during BIOS initialization, a POST code is indicated.

For further information, please contact Kontron.

Integral Ethernet LEDs:

ACT (green): Ethernet Link/Activity

SPEED (green/orange): Ethernet Speed

SPEED ON (orange): 1000 Mbit (only for RJ-45)


SPEED ON (green): 100 Mbit

SPEED OFF: 10 Mbit



B.5 CP305-TR Module Layout

Figure B-3: CP305-TR Module Layout (Top View)

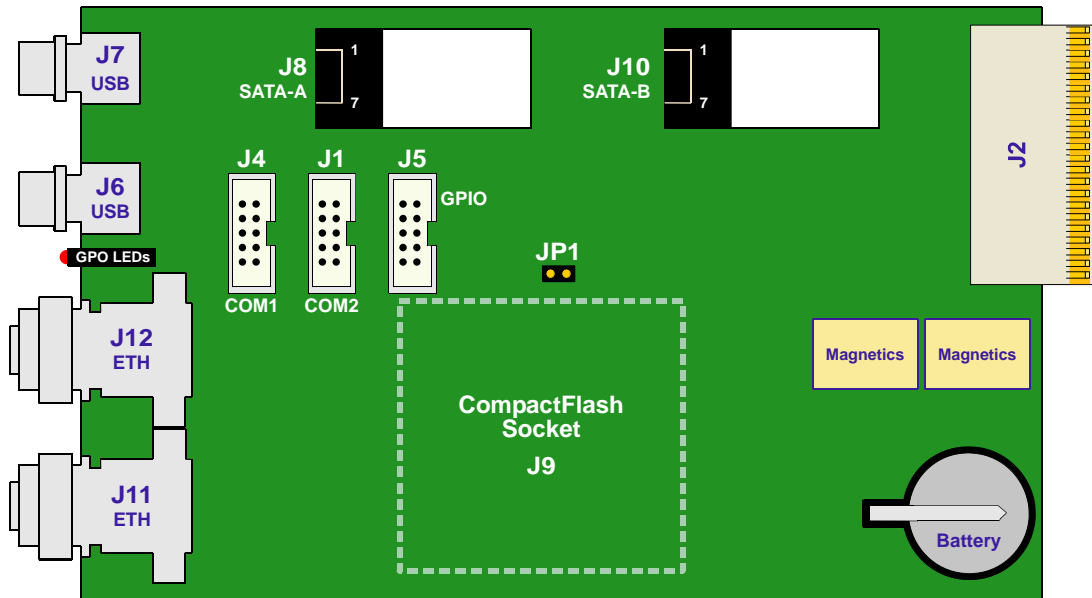



B.6 Module Interfaces (Front Panel and Onboard)

B.6.1 USB Interfaces

The CP305-TR provides two service USB 2.0 ports implemented via two M8, A-coded connectors, J6 and J7.

The USB 2.0 ports are high-speed, full-speed, and low-speed capable. Hi-speed USB 2.0 allows data transfers of up to 480 Mb/s.

One USB peripheral may be connected to each port. To connect more USB devices than there are available ports, an external hub is required.

Figure B-4: USB Connectors J6 and J7




Table B-2: USB Connectors J6 and J7 Pinout

PIN	SIGNAL	FUNCTION	I/O
1	VCC	VCC	--
2	UV0-	Differential USB-	I/O
3	UV0+	Differential USB+	I/O
4	GND	GND	--



Note ...

The CP305-TR host interfaces can be used with maximum 500 mA continuous load current as specified in the Universal Serial Bus Specification, Revision 2.0. Short-circuit protection is provided. All the signal lines are EMI-filtered.



B.6.2 Ethernet Interfaces

The CP305-TR provides two Fast Ethernet interfaces realized as two M12, D-coded connectors, J11 and J12. The interface provides automatic detection and switching between 10Base-T and 100Base-TX transmission (Auto-Negotiation).

Figure B-5: Fast Ethernet Connectors J11 and J12

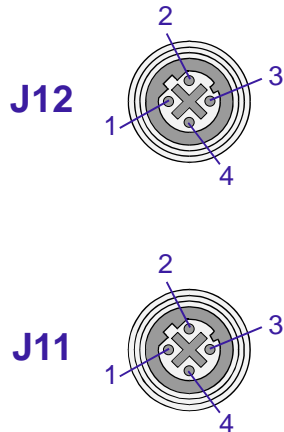


Table B-3: Fast Ethernet Connectors J11 and J12 Pinout

10BASE-T/100BASE-TX		
PIN	SIGNAL	I/O
1	TX+	O
2	RX+	I
3	TX-	O
4	RX-	I

The Ethernet LEDs of the dual Ethernet connector J11A/B on the CP305 also indicate the status of the Fast Ethernet connectors J11 and J12 on the CP305-TR. The LEDs integrated in the J11A connector on the CP305 correspond to the J12 connector on the CP305-TR. The LEDs integrated in the J11B connector on the CP305 correspond to the J11 connector on the CP305-TR.



Note ...

To activate the Fast Ethernet connectors on the CP305-TR, the Gig. Ethernet 1 / Gig. Ethernet 2 function in BIOS must be set to Rear.



B.6.3 Serial Ports

The CP305-TR module provides two identical serial ports, COM1 and COM2, for connecting RS-232 devices to the CP305-TR module. The serial ports include a complete set of handshaking and modem control signals. Data transfer rates up to 115.2 kB/s are supported.

The COM1 port is implemented as a 10-pin onboard connector J4. The COM2 port is implemented as a 10-pin onboard connector J1.



Note ...

To activate the COM1 port on the CP305-TR, the Serial Port 1 function in BIOS must be set to Rear.



Note ...

When the serial port COM2 port is activated, it is not possible to use the GPIO port. The selection of the COM2 port or the GPIO port is done by using jumper JP1.

The following figure and table provide pinout information for the onboard COM connectors J1 and J4.

Figure B-6: Serial Port Connectors J4 (COM1) and J1 (COM2)

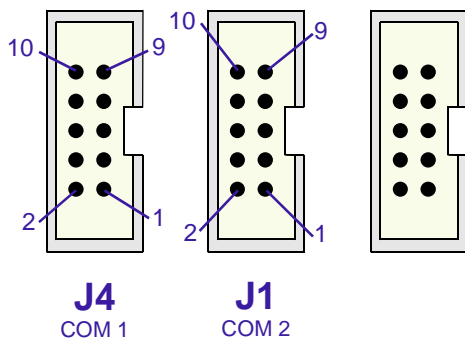


Table B-4: Serial Port Connectors J4 (COM1) and J1 (COM2) Pinout

PIN	SIGNAL	DESCRIPTION	I/O
1	DCD	Data carrier detect	I
2	DSR	Data send request	I
3	RXD	Receive data	I
4	RTS	Request to send	O
5	TXD	Transmit data	O
6	CTS	Clear to send	I
7	DTR	Data terminal ready	O
8	RI	Ring indicator	I
9	GND	Signal ground	--
10	NC	Not connected	--





B.6.4 General Purpose Input/Output Port

The CP305-TR module provides one general purpose input/output port with five general purpose inputs and three general purpose outputs. All ports are isolated and provide 5V TTL signaling level.

The GPIO port is implemented as a 10-pin onboard connector J5.



Note ...

When the serial port GPIO port is activated, it is not possible to use the COM2 port. The selection of the GPIO or the COM2 port is done by using jumper JP1.

The following figure and table provide pinout information for the onboard GPIO connector J5.

Figure B-7: GPIO Connector J5

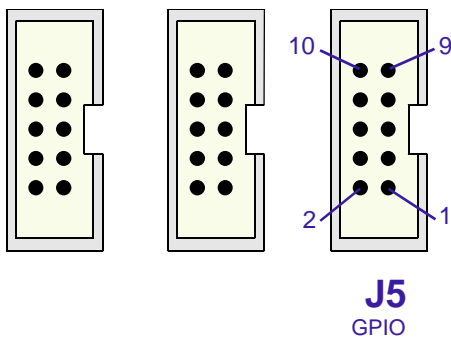


Table B-5: GPIO Connector J5 Pinout

PIN	SIGNAL	DESCRIPTION	I/O
1	GPI3	General purpose input 3	I
2	GPI2	General purpose input 2	I
3	GPI0	General purpose input	I
4	GPO1	General purpose output 1	O
5	GPO0	General purpose output 0	O
6	GPI1	General purpose input 1	I
7	GPO2	General purpose output 2	O
8	GPI4	General purpose input 4	I
9	GND	Signal ground	--
10	VCC5V	Power 5V	--



B.6.5 Serial ATA Interfaces SATA-A and SATA-B

The CP305-TR provides two onboard SATA II interfaces implemented as two onboard SATA connectors, J8 and J10, used to connect standard SATA devices via a SATA cable.

The following figure and table provide pinout information for the SATA connectors J8 and J10.

Figure B-8: SATA Con. J8 and J10

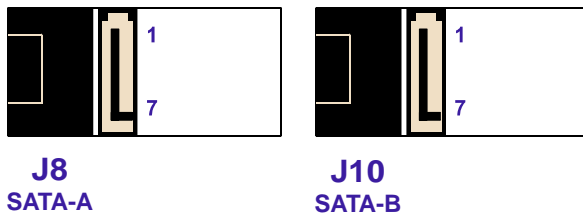


Table B-6: SATA Con. J8 and J10 Pinout

PIN	SIGNAL	FUNCTION	I/O
1	GND	Signal ground	--
2	SATA_TX+	Differential Transmit +	O
3	SATA_TX-	Differential Transmit -	O
4	GND	Signal ground	--
5	SATA_RX-	Differential Receive -	I
6	SATA_RX+	Differential Receive +	I
7	GND	Signal ground	--



Note ...

To ensure secure connectivity, the SATA connector supports the use of SATA II cables (SATA cables with locking latch).

Optionally, cable fixation for the SATA cables is also provided. For further information, please contact Kontron.

B.6.6 CompactFlash Socket

To enable flexible flash extension, a CompactFlash (CF) type II socket, J9, is available on the CP305-TR.

CompactFlash is a very small removable mass storage device. It provides True IDE functionality compatible with the 16-bit ATA/ATAPI-4 interface.

The CompactFlash socket is connected to the IDE port of the ICH7-M and is set to master configuration.

The CP305-TR supports DMA and both CF type I and CF type II with 5 V power supply.

To improve mechanical stability, the CompactFlash card can be secured after installation by inserting an appropriate fixation mechanism in the hole next to the CompactFlash socket. For further information, please contact Kontron.





The following table provides the pinout for the CompactFlash connector J9.

Table B-7: CompactFlash Connector J9 Pinout

I/O	FUNCTION	SIGNAL	PIN	PIN	SIGNAL	FUNCTION	I/O
--	Ground Signal	GND	1	2	D03	Data 3	I/O
I/O	Data 4	D04	3	4	D05	Data 5	I/O
I/O	Data 6	D06	5	6	D07	Data 7	I/O
O	Chip Select 0	IDE_CS0	7	8	GND (A10)	--	--
--	--	GND (ATASEL)	9	10	GND (A09)	--	--
--	--	GND (A08)	11	12	GND (A07)	--	--
--	Power 5 V	VCC	13	14	GND (A06)	--	--
--	--	GND (A05)	15	16	GND (A04)	--	--
--	--	GND (A03)	17	18	A02	Address 2	O
O	Address 1	A01	19	20	A00	Address 0	O
I/O	Data 0	D00	21	22	D01	Data 1	I/O
I/O	Data 2	D02	23	24	IOCS16	Obsolete	I/O
--	--	NC (CD2)	25	26	NC (CD1)	--	--
I/O	Data 11	D11	27	28	D12	Data 12	I/O
I/O	Data 13	D13	29	30	D14	Data 14	I/O
I/O	Data 15	D15	31	32	IDE_CS1	Chip Select 1	O
--	--	NC (VS1)	33	34	IORD	I/O Read	O
O	I/O Write	IOWR	35	36	VCC (WE)	Power 5 V	--
I	Interrupt Request	INTRQ	37	38	VCC	Power 5 V	--
O	Master/Slave	CSEL (GND/pull-up)	39	40	NC (VS2)	--	--
O	Reset	Reset	41	42	IORDY	I/O Ready	I
I	DMA Request	DMARQ	43	44	DMACK	DMA Acknowledge	O
I/O	Drive Active Slave Present	DASP	45	46	PDIAG#/ CBLID#*	--	--
I/O	Data 08	D08	47	48	D09	Data 09	I/O
I/O	Data 10	D10	49	50	GND	Ground Signal	--

* Signal terminated with 10 kΩ pull-down resistor



Note ...

The CompactFlash socket on the CP305-TR supports all available CompactFlash cards type I and type II with 5 V power supply.



B.6.7 CompactPCI Interface

The CP305-TR provides one CompactPCI interface with rear I/O functionality and implemented as CompactPCI connector J2, which connects to the rear I/O connector J2 on the CP305 through a suitable backplane.

The CP305-TR module conducts a wide range of I/O signals through the CompactPCI connector J2.



Note ...

In order to use the CP305-TR, a rear I/O-configured CP305 board and a 32-bit, special 3U CompactPCI backplane with adjacent slot communication at the CompactPCI connector J2 such as the Kontron CP3-BP4.5-M are required.



Warning!

Do not plug a CP305 with a CP305-TR module installed into a backplane with 64-bit PCI bus. Failure to comply with the above may result in damage to your board.

Figure B-9: CompactPCI Connector J2

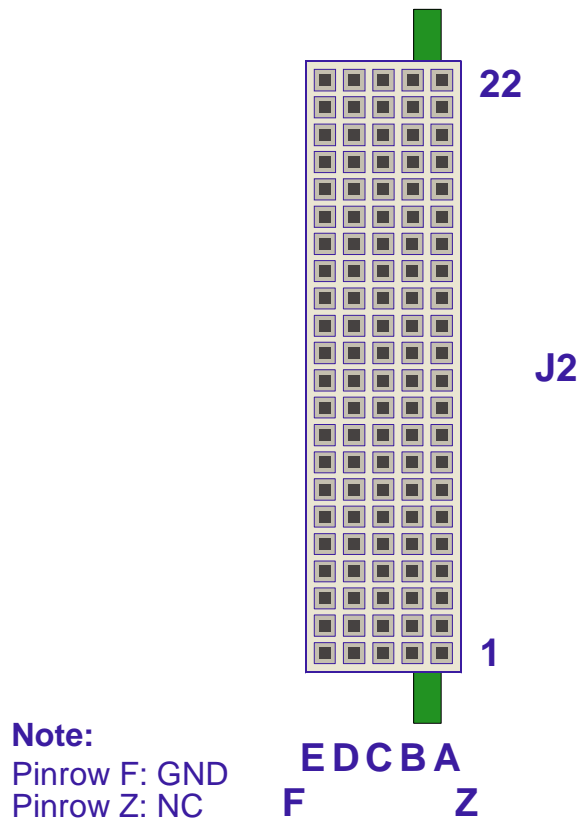


Table B-8: CompactPCI Connector J2 Pinout

PIN	ROW Z	ROW A	ROW B	ROW C	ROW D	ROW E	ROW F
22	NC	NC	NC	NC	NC	NC	GND
21	NC	NC	GND	USB1P / bi	USB3P / bi	USB1_5V / in	GND
20	NC	NC	GND	USB1N / bi	USB3N / bi	USB3_5V / in	GND
19	NC	GND	GND	NC	NC	RIO_3.3V / in	GND
18	NC	1RXD / out	1DCD / out	1DTR / in	2CTS / out	1CTS / out	GND
17	NC	1TXD / in	2RXD / out	NC	NC	NC	GND
16	NC	1DSR / out	1RTS / in	NC	NC	1RI / out	GND
15	NC	Battery	NC	NC	NC	NC	GND
14	NC	IPA_DA+ / bi	IPA_DA- / bi	2RTS / in	IPA_DC+ / bi	IPA_DC- / bi	GND
13	NC	IPA_DB+ / bi	IPA_DB- / bi	2RI / out	IPA_DD+ / bi	IPA_DD- / bi	GND
12	NC	IPB_DA+ / bi	IPB_DA- / bi	RIO_2V5 / in	IPB_DC+ / bi	IPB_DC- / bi	GND
11	NC	IPB_DB+ / bi	IPB_DB- / bi	2DCD / out	IPB_DD+ / bi	IPB_DD- / bi	GND
10	NC	NC	2TXD / in	NC	2DTR / in	NC	GND
9	NC	SATA-B-TXP / in	GND	NC	NC	SATA-A-TXP / in	GND
8	NC	SATA-B-TXN / in	NC	NC	GND	SATA-A-TXN / in	GND
7	NC	NC	2DSR / out	NC	NC	NC	GND
6	NC	SATA-B-RXP / out	NC	NC	GND	SATA-A-RXP / out	GND
5	NC	SATA-B-RXN / out	GND	NC	NC	SATA-A-RXN / out	GND
4	NC	NC	RIO_5V / in	NC	GPIO_CFG0 / out	NC	GND
3	NC	NC	GND	NC	NC	NC	GND
2	NC	NC	NC	NC	NC	NC	GND
1	NC	NC	GND	NC	NC	NC	GND

**Warning!**

The RIO_XXX signals are power supply **INPUTS** to supply the CP305-TR module with power. These pins **MUST NOT** be connected to any other power source, either within the backplane itself or within a CP305-TR module.

Failure to comply with the above will result in damage to your board.



Legend for Table B-8:

SATAx	Serial ATA port
IPx	Gigabit Ethernet port
USBx	USB interface and power
COM1x	COM1 port
GPIOx	COM2 port or GPIO
Battery	Battery power signal
5V/3.3V	Power
GPIO_CFG0	Indicates the current setting, either GPIO or COM2

B.6.8 Battery

The CP305-TR is provided with a 3.0 V “coin cell” lithium battery for the RTC. For further information concerning the battery and its replacement, refer to Chapter 3.5.3, Battery Replacement.



Note ...

If a CP305-TR module is used on the CP305, either the CP305 or the CP305-TR module may be equipped with a battery.

Using one battery on the CP305 and one on the CP305-TR module simultaneously may result in premature discharge of the batteries.



Note ...

The user must be aware that the battery’s operational temperature range is less than the board’s storage temperature range.

For exact range information, refer to the battery manufacturer’s specifications.

B.6.9 Configuration of Jumper JP1

The CP305-TR is equipped with one jumper JP1 for switching the CP305 logic interface between the second COM port (COM2) and the GPIO port.

This jumper must be set prior to booting in order for the configuration to be valid.

Table B-9: Configuration of Jumper JP1

JP1	DESCRIPTION
Open	Activation of the GPIO port
<i>Closed</i>	<i>Activation of the COM2 port</i>

The default setting is indicated by using italic bold.




Appendix 

CP-RIO3-04 Rear I/O



This page has been intentionally left blank.





C. CP-RIO3-04 Rear I/O Module

C.1 Overview

The CP305 provides optional Rear I/O connectivity for peripherals, a feature which may be particularly useful in specialized CompactPCI systems. Some standard PC interfaces are implemented and assigned to the front panel and to the Rear I/O connector J2 on the CP305.

When the CP-RIO3-04 Rear I/O module is used, the signals of some of the main board/front panel connectors are routed to the module interface. Thus, the CP-RIO3-04 Rear I/O module makes it much easier to remove the CPU in the rack as there is practically no cabling on the CPU board.

For the system Rear I/O feature a special backplane is necessary. The CPU board with Rear I/O is compatible with all standard CompactPCI passive backplanes with Rear I/O support on the system slot.

The CP-RIO3-04 Rear I/O Module provides the following interfaces.

- CompactPCI Rear I/O
- Two USB 2.0 ports
- Two Gigabit Ethernet ports without LED signals
- Two COM ports
- VGA analog port
- Two SATA ports
- One fan monitor input
- One fan control output (PWM)
- Power supply management

C.2 Technical Specifications


Table C-1: CP-RIO3-04 Rear I/O Module Main Specifications

CP-RIO3-04 Rear I/O		SPECIFICATIONS
External Interfaces	USB	Two USB 2.0 interfaces; two 4-pin connectors
	VGA	One VGA interface; 15-pin D-Sub connector
	Ethernet	Two Gigabit Ethernet interfaces implemented as dual RJ-45 connector without LEDs
	COM	Two serial ports (COM1 and COM2), RS-232; 9-pin D-Sub connectors (8HP only), full modem support
Internal Interfaces	SATA	Two SATA interfaces; SATA-A and SATA-B
	Peripheral Control	One 10-pin, 2.54 mm onboard connector <ul style="list-style-type: none"> • One fan monitor input • One fan control output (PWM) • Power supply management
	Compact PCI	CompactPCI connector for connecting Rear I/O to the backplane
	COM	Two COM ports implemented as two 10-pin, 2.54 mm onboard connectors (4HP only) full modem support
General	Temperature Range	Operational: 0°C to +60°C Storage: -55°C to +85°C
	Climatic Humidity	93% RH at 40°C, non-condensing (acc. to IEC 60068-2-78)
	Dimensions	100 mm x 80 mm
	Board Weight	4 HP: 120 grams 8HP: 150 grams



C.3 Front Panels

Figure C-1: CP-RIO3-04 Front Panels, 4HP and 8HP Versions

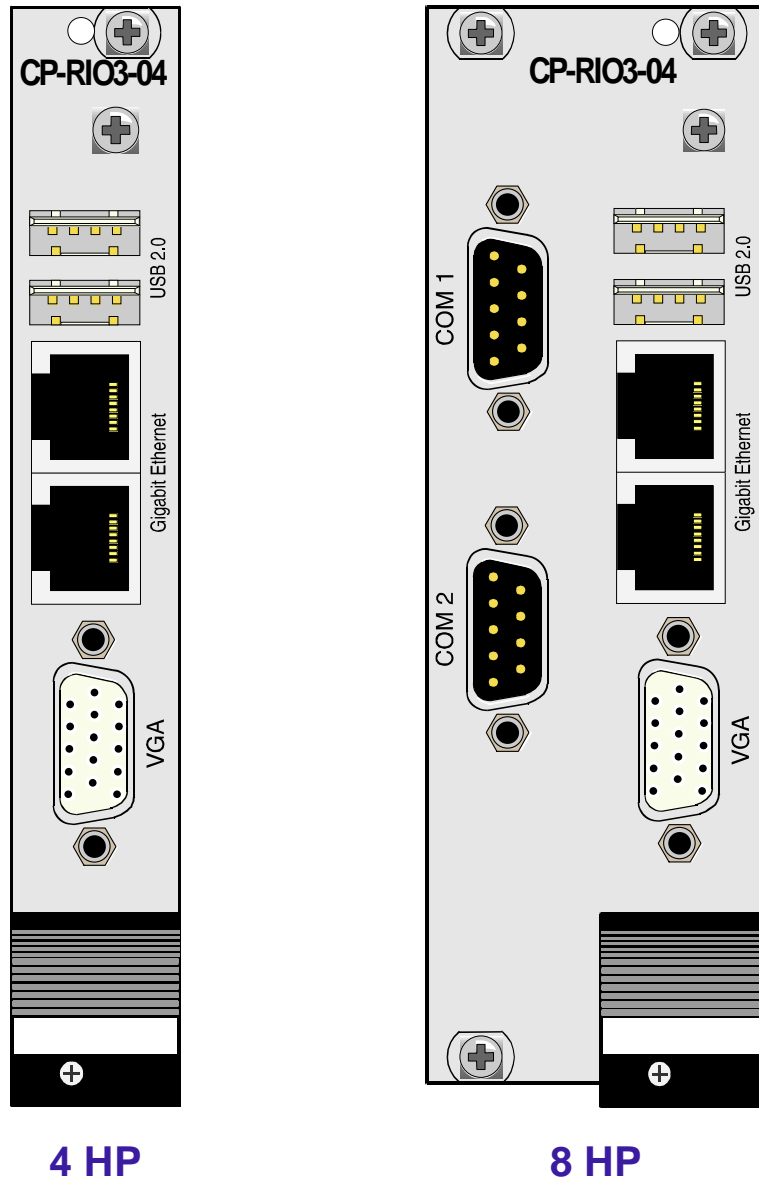



C.4 Module Layout: 4HP and 8HP Versions

Figure C-2: CP-RIO3-04 Module Layout, 4HP Version


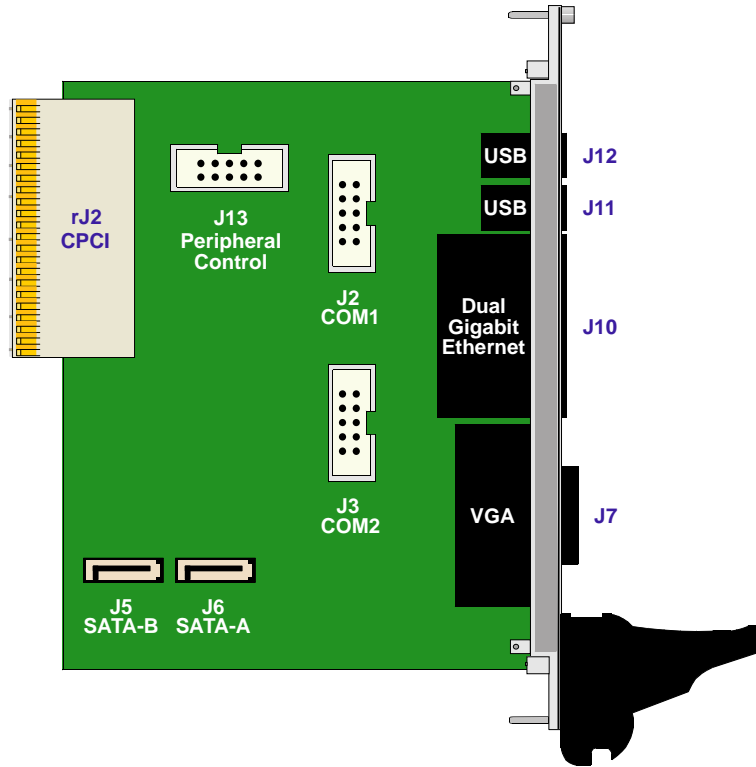


Figure C-3: CP-RIO3-04 Module Layout, 8HP Version



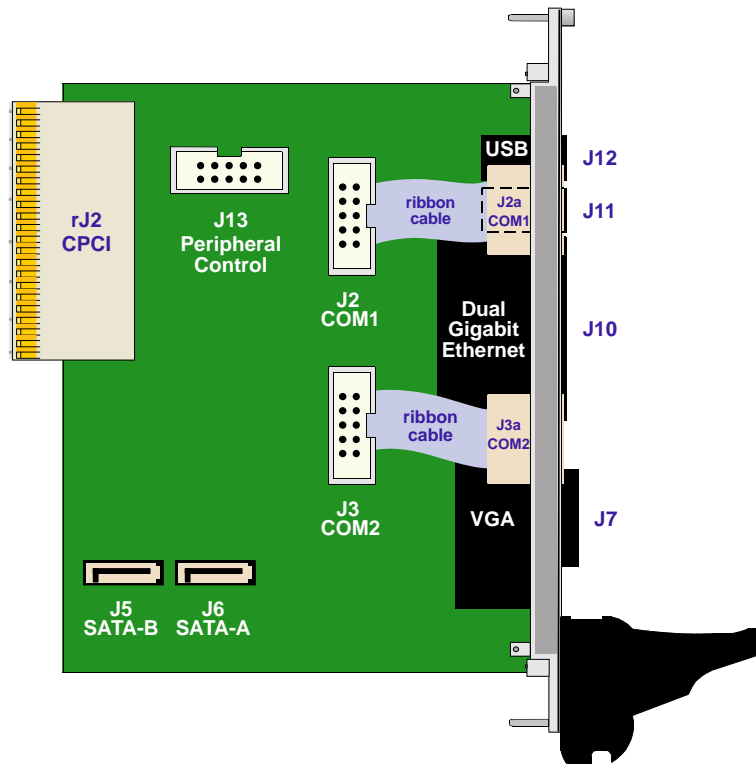

C.5 Module Interfaces

C.5.1 USB Interfaces

There are two identical USB interfaces on the CP-RIO3-04 Rear I/O module, each with a maximum transfer rate of 480 Mb/s provided for connecting USB devices. One USB peripheral may be connected to each port. To connect more USB devices than there are available ports, an external hub is required.

Figure C-4: USB Connectors J11/J12




Table C-2: USB Con. J11 and J12 Pinout

PIN	SIGNAL	DESCRIPTION	I/O
1	VCC	VCC signal	O
2	UV0-	Differential USB-	I/O
3	UV0+	Differential USB+	I/O
4	GND	GND signal	--



Note ...

The USB host interfaces on the CP-RIO3-04 Rear I/O module can be used with maximum 500 mA continuous load current as specified in the Universal Serial Bus Specification, Revision 2.0. Short-circuit protection is provided. All the signal lines are EMI-filtered.



Note ...

The Rear I/O interface supports the USB 1.1 and USB 2.0 standards. For USB 2.0 it is strongly recommended to use a cable length not exceeding 3 meters.



C.5.2 VGA Interface

The 15-pin female connector J7 is used to connect a VGA monitor to the CP-RIO3-04 Rear I/O module.

Figure C-5: D-Sub VGA Con. J7

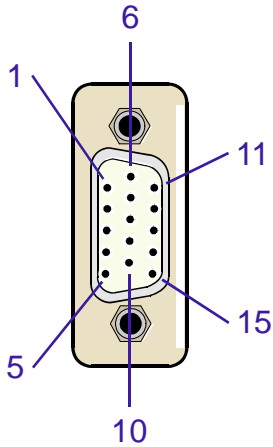


Table C-3: D-Sub VGA Connector J7 Pinout

PIN	SIGNAL	FUNCTION	I/O
1	Red	Red video signal output	O
2	Green	Green video signal output	O
3	Blue	Blue video signal output	O
13	Hsync	Horizontal sync.	TTL Out
14	Vsync	Vertical sync.	TTL Out
12	Sdata	I ² C data	I/O
15	Sclk	I ² C clock	O
9	VCC	Power +5V, 140 mA fuse protection	O
5,6,7,8,10	GND	Ground signal	--
4,11	NC	--	--






C.5.3 Gigabit Ethernet Interface

The Ethernet connectors are realized as RJ-45 connectors. The interface provides automatic detection and switching between 10Base-T, 100Base-TX and 1000Base-T data transmission (Auto-Negotiation). Auto-wire switching for crossed cables is also supported (Auto-MDI/X).

RJ-45 Connector J10A/B Pinouts

The J10A/B connector supplies the 10Base-T, 100Base-TX and 1000Base-T interfaces to the Ethernet controller.

Figure C-6: Dual Gigabit Ethernet Connector J10A/B Table C-4: Pinout of the Dual GbE Con. J10A/B



PIN	MDI / STANDARD ETHERNET CABLE					
	10BASE-T		100BASE-TX		1000BASE-T	
	SIGNAL	I/O	SIGNAL	I/O	SIGNAL	I/O
1	TX+	O	TX+	O	BI_DA+	I/O
2	TX-	O	TX-	O	BI_DA-	I/O
3	RX+	I	RX+	I	BI_DB+	I/O
4	-	-	-	-	BI_DC+	I/O
5	-	-	-	-	BI_DC-	I/O
6	RX-	I	RX-	I	BI_DB-	I/O
7	-	-	-	-	BI_DD+	I/O
8	-	-	-	-	BI_DD-	I/O



Note ...

The Ethernet transmission can operate effectively with structured cable that meets CAT5 cable or higher specifications.



C.5.4 COM Interface

The CP-RIO3-04 Rear I/O module provides two identical COM ports for connecting RS-232 devices to the CP-RIO3-04 Rear I/O module.


On the 8HP version, the onboard 10-pin COM connectors J2 and J3 are routed to the 9-pin D-Sub COM connectors J2a and J3a located on the front panel.

On the 4HP version, the COM signals are available only on the onboard 10-pin COM connectors J2 and J3 connectors.

The following figure and table provide pinout information for the 9-pin D-Sub COM connectors J2a and J3a located on the front panel.

Figure C-7: COM Connectors

Table C-5: COM Connectors J2a (COM1) and J3a (COM2) Pinout

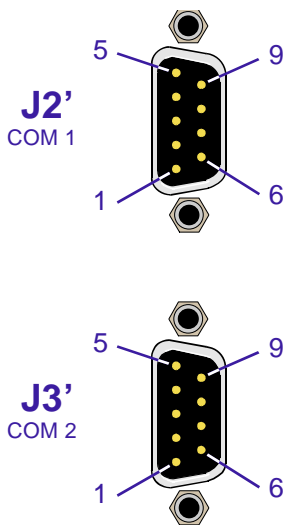


PIN	SIGNAL	DESCRIPTION	I/O
1	DCD	Data carrier detect	I
2	RXD	Receive data	I
3	TXD	Transmit data	O
4	DTR	Data terminal ready	O
5	GND	Signal ground	--
6	DSR	Data send request	I
7	RTS	Request to send	O
8	CTS	Clear to send	I
9	RI	Ring indicator	I

The following figure and table provide pinout information for the onboard COM connectors J2 and J3.

Figure C-8: Serial Port Connectors J2 (COM1) and J3 (COM2)

Table C-6: Serial Port Connectors J2 (COM1) and J3 (COM2) Pinout

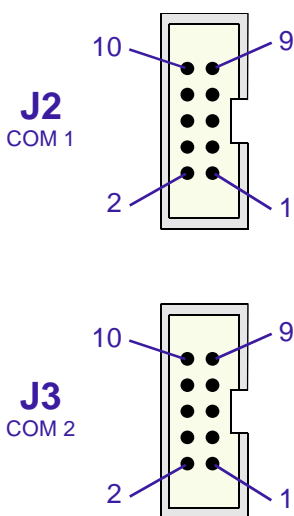

PIN	SIGNAL	DESCRIPTION	I/O
1	DCD	Data carrier detect	I
2	DSR	Data send request	I
3	RXD	Receive data	I
4	RTS	Request to send	O
5	TXD	Transmit data	O
6	CTS	Clear to send	I
7	DTR	Data terminal ready	O
8	RI	Ring indicator	I
9	GND	Signal ground	--
10	NC	Not connected	--




C.5.5 Peripheral Control Interface

A fan for system cooling and a power supply with power management can be connected via the peripheral control connector J13.

The following figure and table provide pinout information for the power connector J13.

Figure C-9: Peripheral Connector J13 **Table C-7: Peripheral Connector J13 Pinout**



PIN	SIGNAL	DESCRIPTION	I/O
1	GND	Signal ground	--
2	PWR_5VSTDBY	+5V standby power (optional)	I
3	FAN_SENSE	Fan speed monitor	I
4	VCC5V	Power +5V	O
5	PWM_OUT	Fan speed control via pulse with modulation signal	O
6	VCC3V3	Power +3.3V	O
7	PWR_SLPS3#	Power supply sleep mode	O
8	GND	Signal ground	--
9	PWR_BTN#	Wake-up / sleep input	I
10	GND	Signal ground	--



Note ...

Pin 5 is an open drain output and has no pull-up resistor on the CP-RIO3-04 Rear I/O module. Therefore, for fan control operations, an external pull-up resistor is required.



C.5.6 Serial ATA Interfaces SATA-A and SATA-B

The onboard Serial ATA connectors J5 and J6 allow the connection of standard HDDs and other Serial ATA devices to the CP-RIO3-04 Rear I/O module.

The following figure and table provide pinout information for the SATA connectors J5 and J6.

Figure C-10: SATA Con. J5 and J6




Table C-8: SATA Connectors J5 and J6 Pinout

PIN	SIGNAL	DESCRIPTION	I/O
1	GND	Ground signal	--
2	SATA_TX+	Differential Transmit +	O
3	SATA_TX-	Differential Transmit -	O
4	GND	Ground signal	--
5	SATA_RX-	Differential Receive -	I
6	SATA_RX+	Differential Receive +	I
7	GND	Ground signal	--



Note ...

When using a Serial ATA cable, it is recommended to use a special right-angled Serial ATA cable due to possible space limitations within the system. For further information, please contact Kontron.



C.5.7 Rear I/O interface on Compact PCI Connector rJ2

The CP-RIO3-04 Rear I/O module conducts a wide range of I/O signals through the Rear I/O connector rJ2.



Warning!

To support the Rear I/O feature a special backplane is necessary. Do not plug a Rear I/O configured board in a non-system slot Rear I/O backplane. Failure to comply with the above may result in damage to your board.

Figure C-11: Rear I/O CompactPCI Connector rJ2

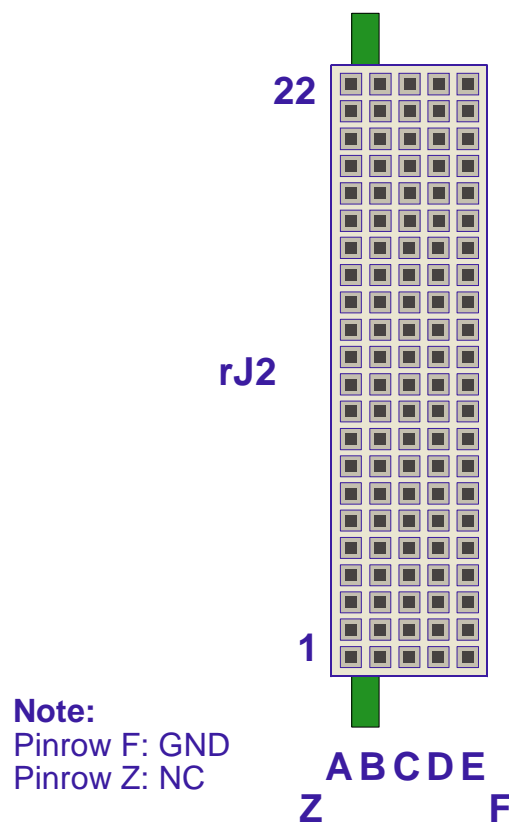




Table C-9: Rear I/O CompactPCI Connector rJ2 Pinout

PIN	ROW Z	ROW A	ROW B	ROW C	ROW D	ROW E	ROW F
22	NC	NC	NC	NC	NC	NC	GND
21	NC	NC	GND	USB1P / bi	USB3P / bi	USB1_5V / in	GND
20	NC	NC	GND	USB1N / bi	USB3N / bi	USB3_5V / in	GND
19	NC	GND	GND	PWR_BTN# / out	PWR_SLPS3# / in	RIO_3.3V / in	GND
18	NC	1RXD / out	1DCD / out	1DTR / in	2CTS / out	1CTS / out	GND
17	NC	1TXD / in	2RXD / out	NC	NC	NC	GND
16	NC	1DSR / out	1RTS / in	NC	RSV	1RI / out	GND
15	NC	PWR_5VSTDBY / out	FAN_SENSE / out	NC	NC	NC	GND
14	NC	IPA_DA+ / bi	IPA_DA- / bi	2RTS / in	IPA_DC+ / bi	IPA_DC- / bi	GND
13	NC	IPA_DB+ / bi	IPA_DB- / bi	2RI / out	IPA_DD+ / bi	IPA_DD- / bi	GND
12	NC	IPB_DA+ / bi	IPB_DA- / bi	RIO_2V5 / in	IPB_DC+ / bi	IPB_DC- / bi	GND
11	NC	IPB_DB+ / bi	IPB_DB- / bi	2DCD / out	IPB_DD+ / bi	IPB_DD- / bi	GND
10	NC	GND	2TXD / in	VGA_RED / in	2DTR / in	GND	GND
9	NC	SATA-B-TXP / in	GND	VGA_HSYNC / in	GND	SATA-A-TXP / in	GND
8	NC	SATA-B-TXN / in	GND	VGA_BLUE / in	GND	SATA-A-TXN / in	GND
7	NC	GND	2DSR / out	VGA_I2C_DAT / bi	PWM_OUT / in OD	GND	GND
6	NC	SATA-B-RXP / out	GND	VGA_GREEN / in	GND	SATA-A-RXP / out	GND
5	NC	SATA-B-RXN / out	GND	VGA_VSYNC / in	GND	SATA-A-RXN / out	GND
4	NC	NC	RIO_5V / in	VGA_I2C_CLK / in	GPIO_CFG0 / out	GND	GND
3	NC	NC	GND	NC	NC	NC	GND
2	NC	NC	NC	NC	NC	NC	GND
1	NC	NC	NC	NC	NC	NC	GND



Warning!

The RIO_XXX signals are power supply **INPUTS** to supply the Rear I/O module with power. These pins **MUST NOT** be connected to any other power source, either within the backplane itself or within a Rear I/O module.

Failure to comply with the above will result in damage to your board.



Legend for Table C-4:

SATAx	Serial ATA port
IPx	Gigabit Ethernet port
USBx	USB interface and power
VGAx	VGA signals
COM1x	COM1 port
GPIOx	COM2 port or GPIO
PWRx	Power Management signals
5V/3.3V	Power
GPIO_CFG0	GPIO configuration (GPIO or COM2)



This page has been intentionally left blank.

