


*NOTE: ALL relevant materials are complied with RoHS directive.
THE BRACKET IS CONTACT WITH SHIELD(USB AF)



9	BLACK HEAT SHRINK TUBE $\phi 1.5 \times 40\text{mm}$	2
8	BLACK HEAT SHRINK TUBE $\phi 10.0 \times 20\text{mm}$	1
7	BLACK HEAT SHRINK TUBE $\phi 1.0 \times 10\text{mm}$	2
	MOLDED PE COLOR TRANSPARENT	
	MOLDED PVC BEIGE	
6	BRACKET WITH TWO HOLE FOR USB FEMALE	1
5	USB 2.0 CABLE, UL STYLE 1 TWISD PAIR 28AWG AND 2C 24AWG, OD 4.5mm, JACKET BEIGE, DRAWING No. EUAB2801P2402C-015	305mm*2
4	HEX-NUT #4-40, 5*7.7mm	4
3	SCREW #4-40, 5.5*8mm	4
2	TERMINAL: CKM2542-T	8
	HOUSING: CKM2542-2*5P, PITCH 2.54mm	1
1	USB A FEMALE 2.0, GOLD PLATING 30u" ON CONTACTS, WHITE INSULATOR	2
No.	DESCRIPTION	Q'TY

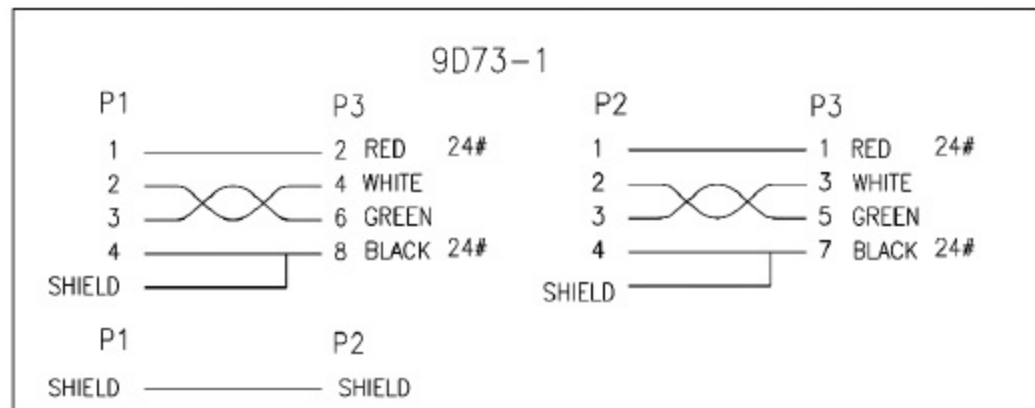

CHECKED	APPROVED	SCALE: NTS	REV NO	DATE	DESCRIPTION	BY	CHECKED	WORKING STATION
		UNIT: mm	A					
DRAWN NAME	DATE	CAD NO	B					
DWG NAME	RE011-821402 (RoHS)	RE011-821402	C					