


★ NOTE: All relevant materials are complied with RoHS directive .

9	BLACK HEAT SHRINK TUBE $\phi 1.5 \times 35\text{mm}$ OR $\phi 1.0\text{mm}$ (RoHS)	2	M519
8	BLACK HEAT SHRINK TUBE $\phi 5.0 \times 18\text{mm}$ OR $\phi 9.0\text{mm}$ (RoHS)	1	M519
7	BLACK HEAT SHRINK TUBE $\phi 1.0 \times 10\text{mm}$ (RoHS)	2	M519
	MOLDED PE COLOR TRANSPARENT		TWN
6	MOLDED PVC BEIGE		M304
	BRACKET WITH TWO HOLE FOR USB FEMALE(RoHS)	1	M385
5	USB 2.0 CABLE, UL STYLE 1 TWISD PAIR 28AWG AND 2C 24AWG, OD 4.7mm, JACKET BEIGE, DRAWING No. EUAB2801P2402C-015(RoHS) OR CABLE:UL2725 2.0V USB CABLE, 24AWG(7/0.163)*2C+28AWG(7/0.127)*1P OD=4.5±0.15mm JACKET COLOR:PLATINUM-GRAY	300mm*2	M304
4	HEX-NUT 5*7.7mm(RoHS)	4	M95
3	SCREW 5.5*8mm(RoHS)	4	M95
2	TERMINAL: CKM2542-T(RoHS)	8	M31
	HOUSING: CKM2542-2*5P, PITCH 2.54mm(RoHS)	1	M31
1	USB A FEMALE 2.0, GOLD PLATING 30 μ " ON CONTACTS, WHITE INSULATOR (RoHS)	2	M108
No.	DESCRIPTION	Q'TY	Supplier

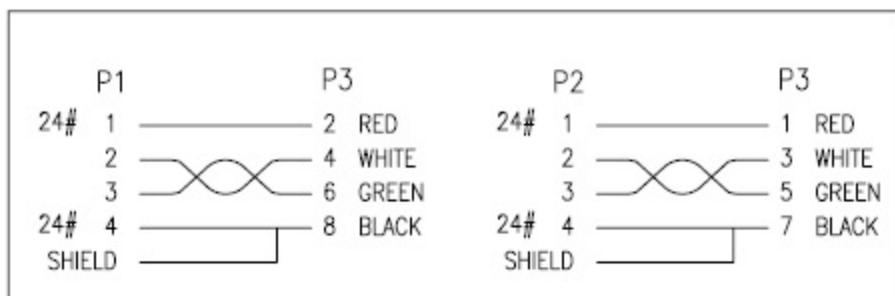

DWG NAME

RE011-821401

CHECKED

APPROVED

SCALE: NTS

REV NO

DATE

DESCRIPTION

BY

CHECKED

WORKING STATION

UNIT: mm(in.)

A

DRAWN NAME

DATE

CAD NO

B

C

05.06.15