


AT8902



AdvancedTCA BASE/FABRIC HUB BOARD WITH DUAL AdvancedMC SUPPORT

- ▶ PICMG 3.0/3.1-compliant base interface (GbE) switch
- ▶ non-blocking layer 2/3 switching /routing
- ▶ advanced level 3, IPv4 & IPv6
- ▶ options for QoS support and jumbo packet line rate switching
- ▶ 4x GbE x base/fabric uplinks on front panel

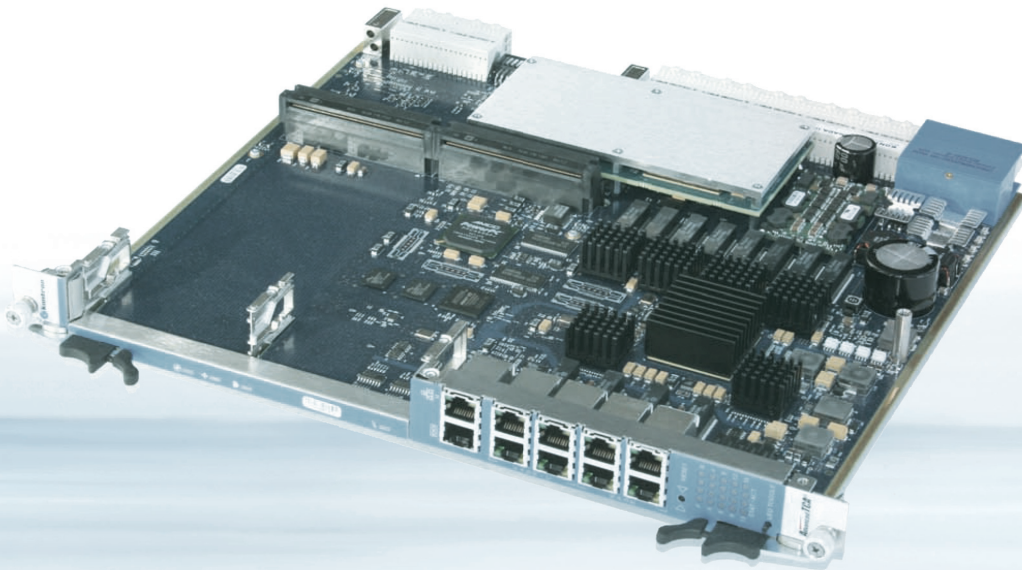

AdvancedTCA / AdvancedMC OPEN MODULAR SOLUTIONS

Versatile Base and Fabric AdvancedTCA Switch

The Kontron AT8902 is an AdvancedTCA Base and Fabric Switch board that is PICMG 3.0/3.1 compliant. Built to support two Mid-Size or two Full-Size AdvancedMC modules, the AT8902 is the ideal high-end switch platform that provides maximum design flexibility for a wide range of wireless and wireline network applications, and employs leading-edge switching technology for full wire-speed throughput during all load conditions for any network topology.

Full Redundancy and High Availability

Suitable for dual-star and full-mesh configurations in 14- and 16-slot systems, the AT8902 is hot swappable, supports full redundancy, Layer 2 / 3 protocols (option for Layer 4), and provides 2x 10 Gigabit Ethernet uplink options via one AdvancedMC slot.

AdvancedMC-Everywhere integration for customization

With the support for two AdvancedMC modules, the AT8902 supports an assortment of AdvancedMC modules, such as for processing, mass storage, and I/O GbE inter-links to enable multi-shelf AdvancedTCA systems.

IPMI Support

The AT8902 supports the Intelligent Platform Management Interface Specification (IPMI) 1.5 to manage power, cooling and interconnect needs of intelligent devices, as well as to monitor events and to log events to a central repository.

▶ TECHNICAL INFORMATION

PROCESSOR AND MEMORY	<ul style="list-style-type: none"> - IBM PowerPC® 405 32-bit RISC processor core operating up to 400 MHz with 16KB I- and D-caches - PC-133 synchronous DRAM (SDRAM) interface - 40-bit interface serves 32 bits of data plus 8 check bits for ECC applications 	
ETHERNET	<ul style="list-style-type: none"> - Broadcom fifth generation of StrataSwitch/StrataXGS product line - 24 10/100/1000 Mbps Ethernet ports - Line-rate switching for all packet sizes and conditions - On-chip data packet memory and table memory - Advanced Fast Filter Processor (FFP) ContentAware classification 	<ul style="list-style-type: none"> - Advanced security features in hardware - Port-trunking and mirroring supported across stack - Advanced packet flow control: - Head-of-line-blocking prevention - Back pressure support - Standard compliant 802.1ad provider bridging - IEEE 1149.1 (JTAG) boundary scan
BASE INTERFACE (PICMG 3.0)	<ul style="list-style-type: none"> - Non-blocking layer 2 / 3 switching/routing - 1x GbE connection to one AMC slot 	
FABRIC INTERFACE (PICMG 3.1)	<ul style="list-style-type: none"> - Non-blocking layer 2 / 3 switching/routing with VLANs - Dual GbE services to redundant Hub Board - Dual GbE services to payload slots 2-5 - GbE service to payload slots 6-15 	
PROJECT CUSTOMIZATION WITH ADVANCEDMC SLOTS - MID-SIZE / FULL-SIZE	<ul style="list-style-type: none"> - Dual 10GbE connection to one AMC slot - Processor-AMCC - Storage-AMC - I/O - AMC 	
INTERFACES ON FRONT PANEL	<ul style="list-style-type: none"> - 4x 10/100/1000Base-T Uplinks for Base Interface (B1-B4) - 4x 10/100/1000Base-T Uplinks for Fabric Interface (F1-F4) - 1x 10/100Base-T Management 	<ul style="list-style-type: none"> - 1x RS232 Management - 8 RTM Channels from each AMC Slot - Storage interface for HDD or Flash mass storage (SAS/SATA/FC) from each AMC Slot
INTERFACES TO ATCA BACKPLANE	<ul style="list-style-type: none"> - Zone 2 connectors - Fabric channels 1-5: 2x GbE (1000Base-BX) - Fabric channels 6-15: 1x GbE (1000Base-BX) - Base channel 1 x Ethernet to ShMC(s) (10/100Base-T)* - Base channels 2-16: 1x GbE (1000Base-T) - CLK 1/2/3 A/B - Update Channels: 4x GbE (1000Base-BX) 	<ul style="list-style-type: none"> - Zone 1 connector - Power - IPMB A - IPMB B <p>* Although the Ethernet controller supports 1 Gb/s, the ShMC is set to 10/100Base-T</p>
BOARD MANAGEMENT	<ul style="list-style-type: none"> - Based on IPMI 1.5 - FRU Management - Sensors (Voltage, Current, Temperature, Fuse) - Status and Alerting - Hot Swap - Electronic Keying of Base and Fabric Interfaces 	
MANAGEMENT AND PROTOCOLS	<ul style="list-style-type: none"> - Management via SNMP, TELNET, CLI - In-band - Out of band via Ethernet or RS232 - IPMI version 1.5 - Ethernet/Bridging protocols include - Link aggregation (802.3ad) - VLANs (802.1Q) - Spanning tree (802.1D, 802.1w) - Flow control (802.3x) - GVRP, GMRP 	
PHYSICAL & MECHANICAL	<ul style="list-style-type: none"> - Size: Single slot ATCA board - Power: 50 W typical without AMCs - 8U form factor mechanically compliant to PICMG 3.0 and 3.1 - 2 Mid-Size / Full-Size AMC Slots - 280 mm x 322 mm (11.024" x 12.677") - 1,8 kg 	

TECHNICAL INFORMATION

GENERAL COMPLIANCES		<p>The AT8901 conforms to the following specifications:</p> <ul style="list-style-type: none"> - PICMG 3.0 AdvancedTCA Base Specification, Revision 2.0 - PICMG 3.1 Ethernet/Fibre Channel for AdvancedTCA Systems, Revision 1.0 - AMC.0 AMC Base Specification - AMC.1 PCI-Express and Advanced Switching on AMC - DO.96 of AMC.2 Revision 1.0 Gigabit Ethernet - DO.9d of AMC.3 Revision 1.0 Storage - IPMI v1.5 Intelligent Platform Management Interface Specification 	
ENVIRONMENTAL	<p>TEMPERATURE* HUMIDITY*</p> <p>ALTITUDE* SHOCK* VIBRATION*</p>	<p>Operating 0° C to 55° C 15 %-90 % (non-condensing) at 55° C (131° F) 4000 m (13,123 ft) 30G/11 ms half sine 5 to 100 Hz: 1G @ 0.25 Octave/minute</p>	<p>Storage and Transit -40 to +70° C / -10 to 158° F* 15 %-90 % (non-condensing) at 55° C (131° F) 15,000 m / 49,212 ft 50G, 170 inches/second trapezoidal 5 to 50 Hz: 0.5G @ 0.1 Octave/minute</p>

*Meet or exceed; Targeted MTBF is 150,000h @ 30°C, calculations based on Bellcore/ Telcordia SR-332 Issue 1

CORPORATE OFFICES

EUROPE, MIDDLE EAST & AFRICA

Lise-Meitner-Str. 3-5
86156 Augsburg
Germany
Tel.: + 49 821 4086 0
Fax: + 49 821 4086 111
info@kontron.com

NORTH AMERICA

14118 Stowe Drive
Poway, CA 92064-7147
USA
Tel.: + 1 888 294 4558
Fax: + 1 858 677 0898
info@us.kontron.com

ASIA PACIFIC

1-2F, 10 Building, No. 8 Liangshuihe 2nd Street,
Economical & Technological Development Zone,
Beijing, 100176, P.R.China
Tel.: +86 10 63751188
Fax: +86 10 83682438
info@kontron.cn