


3.5" embedded line

➤ JRex-VE

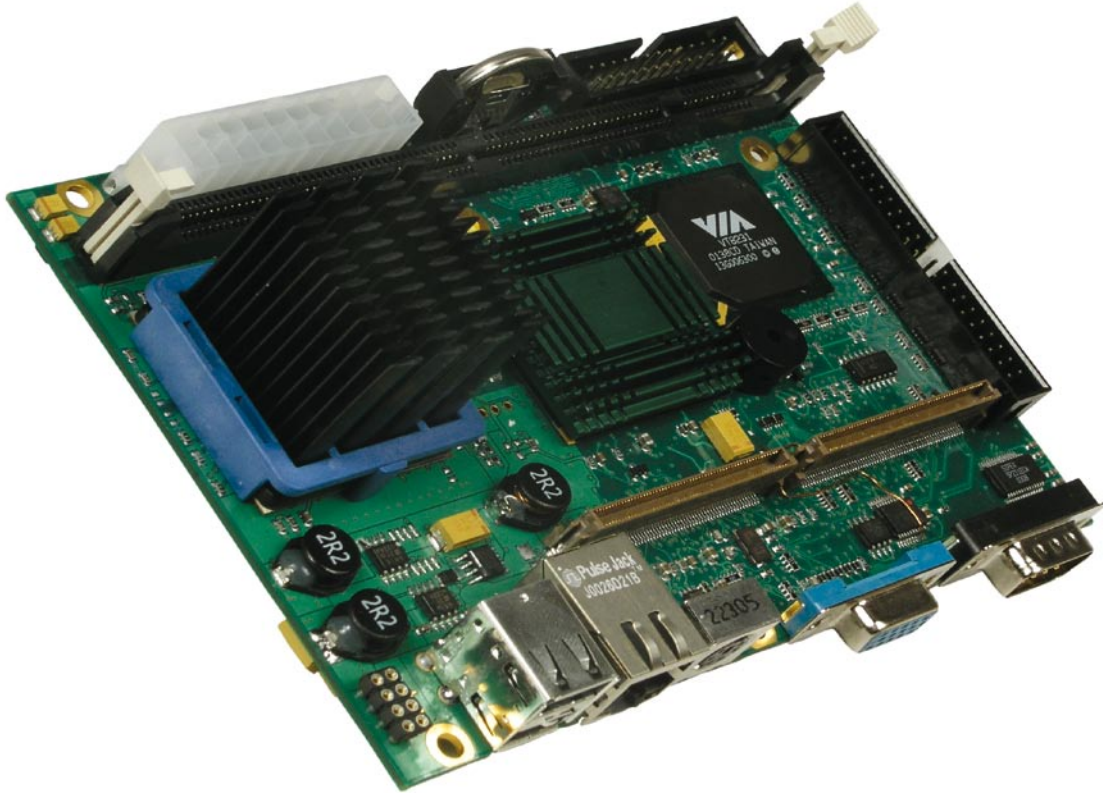

VIA Eden Embedded System Platform

- **COOL** - Low power and fanless VIA Eden™ 300 MHz
- **STORAGE** - Up to 1 GByte SDRAM-DIMM
- **MONEY** - Best price/performance ratio
- **EASY** - Reduced time-to-market, plug-and-work

➤ Product Overview

Each JRex is a member of the 3.5" board family. JRex modules are characterized by the same pinout and interface for 2xUSB, FAST LAN, Keyboard/Mouse-socket, CompactFlash™, VGA and COM1. This family feature allows to reuse chassis and maximizes design re-use.

This **JRex-VE** hosts a VIA Eden™ processor at 300 MHz. The boards performance is enhanced by up to 133 MHz FSB and UMDA-100 EIDE. A SDRAM-DIMM socket for up to 1 GByte allows the use of standard desktop memory and full ATX power

supply is as well a standard feature. These homogeneous features facilitate easy upgrades within the JRex product family. The graphic controller is included in the chipset, that performs with up to 32 MByte UMA. Connection of displays is simplified when using these units which are complete with a JILI-Interface (JUMPtac® Intelligent LVDS Interface). JILI automatically recognizes which display is connected and independently sets all video parameters. All JRex are plug-and-work enabled to further reduce time-to-market.

➤ Technical Information

3.5" Single Board Computer
CPU: VIA Eden™ 300 MHz, 66 MHz FSB, passive cooling
On chip graphics: on VIA Twister™ T chipset, S3 Savage 4™ Engine, up to 32 MByte UMA Video RAM JILI-Interface for instant panel adaption VGA-Interface for CRT
SDRAM: SDRAM-DIMM up to 1 GByte
CompactFlash™: Type 1 Socket
Ethernet: 10/100 BaseT
HD/FD: EIDE UMDA 100/ ✓
LPT: ✓
Keyboard/Mouse: ✓/✓
ATX feature button: accessory

USB/RS232: 2x / 1x
Reset: ✓
LANBoot/DarkBoot: ✓/✓
USBBoot: ✓
Watchdog: ✓
JFlex™ extension: ✓
Dimensions: 102 x 147 mm
Power Supply: ATX or 5V power supply
Temperature (*): operation: 0° to 60°C, storage: -10° to 85°C
Humidity operation: 10% to 90%, storage: 5% to 95% (non condensing)
Plug'n Play compatible to any other JRex and therefore exchangeable

(*) Ask about wider temperature ranges

➤ Ordering Information

Article	Part.-No.	Description
JRex-VE	02003-0000-30-1	VIA Eden™ processor with 300 MHz, 66 MHz FSB, passive cooling, ATX
JRex-VE	02003-0005-30-1	VIA Eden™ processor with 300 MHz, 66 MHz FSB, passive cooling, 5V
	common features:	VIA Twister™ T chipset, VGA/LCD on-chip, 10/100 Base-T, 1xCOM, 2xUSB, LPT, FDC, EIDE, JFLEX™ extension, SDRAM-DIMM-socket for up to 1 GByte, CompactFlash™ socket, JILI-Interface

➤ Corporate Offices

Europe, Middle East & Africa

Kontron AG
Oskar-von-Miller-Str. 1
85386 Eching/Munich
Germany
Tel.: +49 (0)8165/ 77 777
Fax: +49 (0)8165/ 77 219
sales@kontron.com

North America

Kontron America Corporate Office
14118 Stowe Drive
Poway, CA 92064-7147
USA
Tel.: +1 888 294 4558
Fax: +1 858 677 0898
sales@us.kontron.com

Asia Pacific

Kontron Asia Inc.
4F, No. 415, Ti-Ding Blvd.
Sec.2, NeiHu District
Taipei Taiwan 114
Tel.: +886-2-2799-2789
Fax: +886-2-2799-7399
sales@kontron.com.tw

Kontron Embedded Modules

Brunnwiesenstr. 16
94469 Deggendorf
Germany
Tel.: +49 (0)991/ 370 24-100
Fax: +49 (0)991/ 370 24-333
sales@kontron.com