

--

-40°
85°C
Operating
Temperature



SOSA®-aligned VPX
power supply com-
pliant with ANSI/
VITA 62 & VITA 46

3U VPX module
compliant 1inch
wide module with
VITA 46

12 - 68 V Flexible
input 24 V / 48 V


Embedded controller with dual I²C/IPMI and USB monitoring

Up to 600 W with
high-efficiency
switching

The VPX360xMS is a SOSA®-aligned, conduction-cooled 3U VPX power supply designed for demanding defense and aerospace applications. Compliant with ANSI/VITA 62 and mechanically aligned with VITA 46, it delivers up to 600 W output power through a highly efficient 12 V-centric architecture and supports a wide 12 to 68 VDC input range.

Built for reliable operation in harsh environments, the module integrates comprehensive protection features, health monitoring, and system management capabilities. Dual I²C interfaces compliant with VITA 46.11 (IPMI 2.0) and a USB interface enable advanced configuration, monitoring, and diagnostics. Designed to meet key MIL-STD requirements, the VPX360xMS provides a robust and dependable power solution for next-generation SOSA®-aligned systems.

Power Architecture

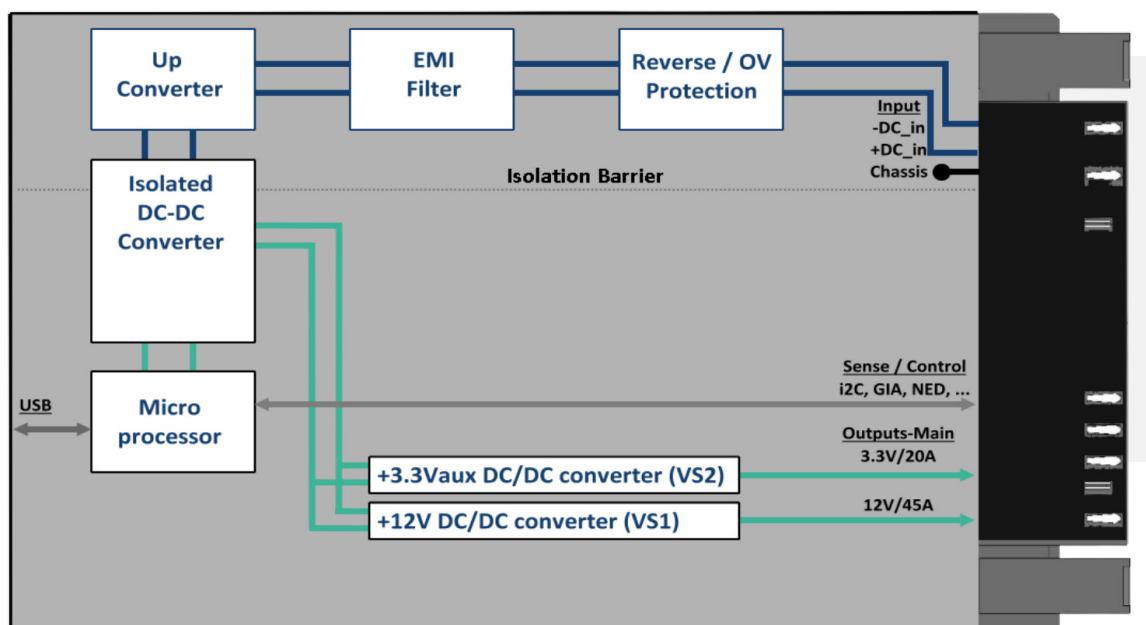

Product Configuration Overview

Specification	VPX360DMS	VPX360EMS
Input Voltage	28 VDC	48 VDC
Output Power	Up to 600 W	Up to 600 W
Mains output voltage / currents	12 V / 60 A 3.3 V / 20 A	12 V / 60 A 3.3 V / 20 A
Form Factor	3U VPX, 5HP	3U VPX, 5HP
Management	VITA 46.11 (IPMI 2.0), USB	VITA 46.11 (IPMI 2.0), USB
Compliance	ANSI/VITA 62.0	ANSI/VITA 62.0
MIL Standards	1275D, 704F, 810, 461F	1275D, 704F, 810, 461F
Coating	Acrylic (standard)	Acrylic (standard)

Configuration & Technical Data

Key Technical Specifications

Category	Parameter	Value
Mechanical	Form Factor	3U VPX CC
	Pitch	5 HP / 1.0 inch
	Weight	0.8 kg / 1.8 lbs
Environmental	Operating Temperature (at wedge lock)	-40°C to 85°C (relative humidity 95%)
	Storage Temperature	-55°C to 105°C
Isolation	Input to Output Isolation	500 V
	Input to Case Ground Isolation	500 V
	Output to Case Ground Isolation	500 V
Grounding	Case Ground to Safety Ground Resistance	< 10 mΩ (TBC)
Power	Maximum Output Power	600 W
	Maximum Input Power	~680 W
	Maximum Dissipated Power @ max. Power	~80 W
Input	Nominal Input Voltage	28 V DC / 48 V DC (different keys)
	Minimum Turn ON Voltage	12 V
	Minimum Turn OFF Voltage	8 V
	Maximum Continuous / Peak Input Voltage	68 V / ±250 V (<1 ms spike)
Protection	Input Overvoltage Protection	Outputs disable if input voltage exceeds 68 VDC for >600 ms (10 second auto-restart)
Thermal	Maximum Internal Working Temperature	125°C
	Temperature Protection Sensing Point (internal)	125°C
	Temperature Protection Sensing Point (internal)	125°C (Outputs disable when internal PCB temperature exceeds threshold)

Technical Data

Key Technical Specifications

Electrical	Fixed Switching Frequencies 12V / 3V3	520 kHz / 520 kHz
	Peak Efficiencies 12V / 3V3	93% / 82%
	Max. Output Ripple and Noise 12V / 3V3	<120 mVpp / <50 mVpp
	Max. Output Ripple and Noise (0-20 MHz Bandwidth)	<30 mVpp / <25 mVpp
Regulation	Line Regulation 12V / 3V3	<10 mV / 10 mV
	Vin=Vin,min to Vin,max, load and Tc fixed	<0.1%
	Load Regulation 12V / 3V3	60 mV / 50 mV
Output	12V / 3V3 Maximum Output Voltage (Sense Lines Open)	12.3 V / 3.45 V
Dynamic Response	Load Transient Recovery Time (50% load change condition)	1 ms
Compliance	Base specification, mechanical and electrical	VITA 62
	System management	Vita 46.11-2022 Tier 2
	MIL-STD-461F (EMI)	Designed (to be tested) in compliance with sections CE102, CS101, CS114, CS115, CS116
	MIL-STD-704F (Transient)	Designed (to be tested) in compliance for normal transients (LDC105), abnormal transients (LDC302) and distortion spectrum (LDC103)
	MIL-STD-1275D	exported & imported voltage spike, imported Voltage Surges, Imported Ripple Voltage
	MIL-STD-810G	Operating Shock Class OS2 Method 516 Procedure I Vibration Method 514.6 Procedure I & paragraph 4.4.3 / Vibration Class V3 (Vita 47) Altitude Method 500 Procedure II

Ordering Information

Article	Ordering Number	Description
VPX 360 DMS / EMS Power Supply	VPXBR360-DMS51051	VPX360DMS: 600 W VPX PSU, 28 VDC input, dual output rails RoHs
	VPXBL360-DMS21051	VPX360DMS: 600 W VPX PSU, 28 VDC input, dual output rails leaded
	VPXBR360-EMS21051	VPX360EMS: 600 W VPX PSU, 48 VDC input, dual output rails RoHs
	VPXBL360-EMS21051	VPX360EMS: 600 W VPX PSU, 48 VDC input, dual output rails leaded

Related Products

Explore Additional VPX and SOSA® Platforms




5 Slot Sosa® Backplane

100G Ethernet VPX backplane compliant with VITA 46, VITA 65 and SOSA®.



[More Information](#)

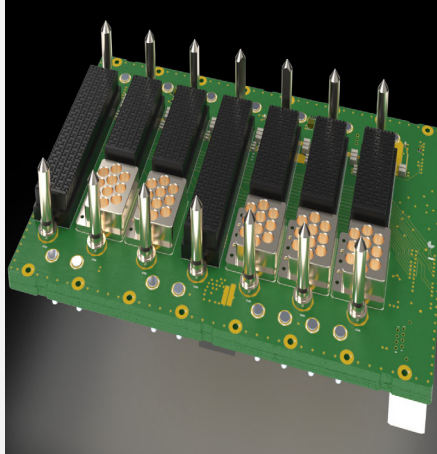

7 Slot Sosa® Backplane

100G Ethernet Backplane compliant with VITA 46, VITA 65 & SOSA®



[More Information](#)



KCC Chassis Control

Advanced Chassis Management for VPX



[More Information](#)

Kontron Hartmann-Wiener GmbH

Linde 18
51399 Burscheid

PH.: +49 2174678-0
sales.khw@kontron.com

Kontron Hartmann-Wiener GmbH

Motorstraße 43
70499 Stuttgart

PH.: +49 71113989-0
sales.khw@kontron.com

Kontron America

202 N Limestone Str., Suite 320
Springfield, OH 45503, USA

PH.: +1 937 324 2420
sales.springfield@kontron.com

[More Information](#)

