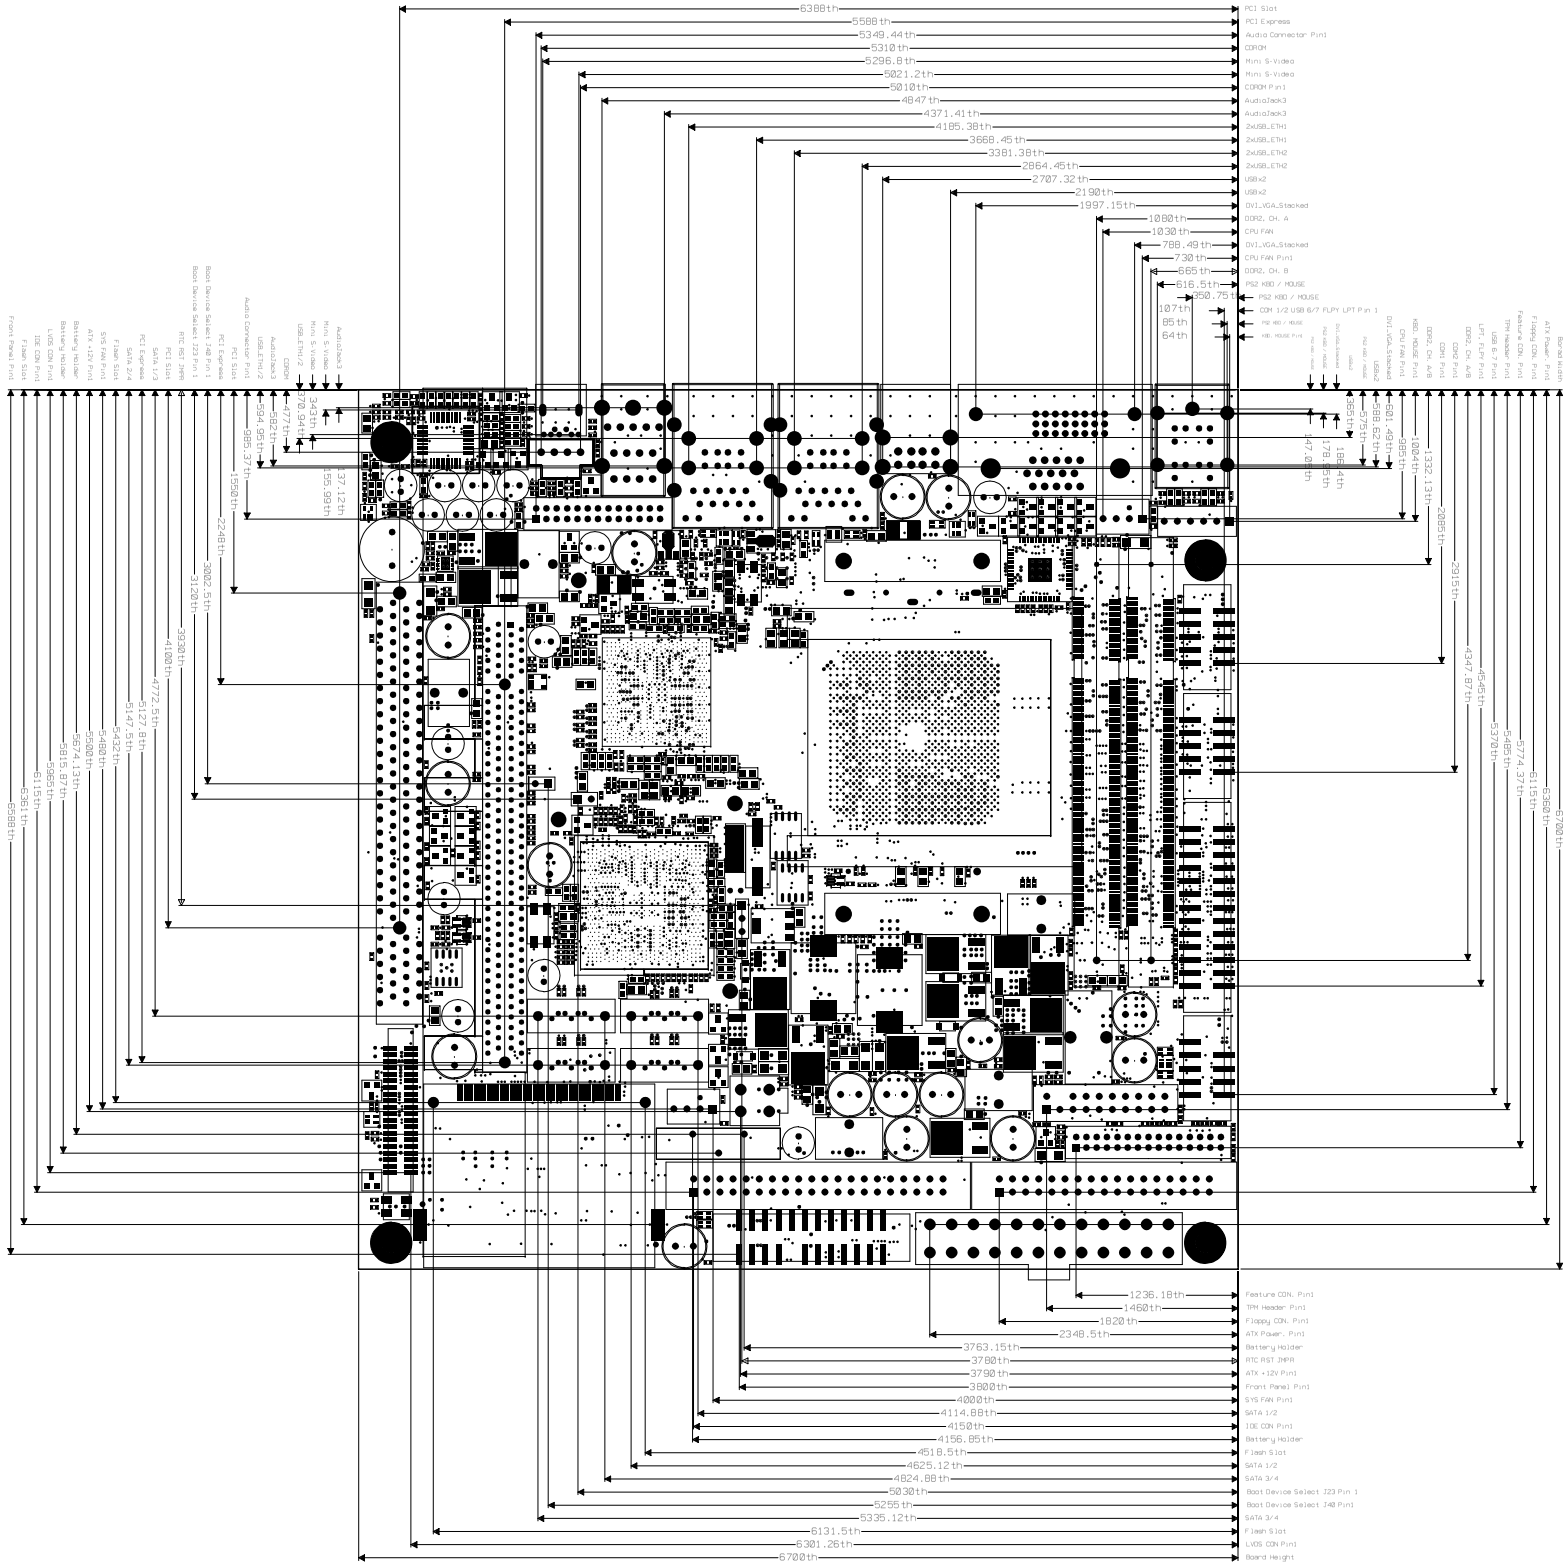
6388th
5588th
5349.44th
5310th
5296.8th
5021.2th
5010th
4847th
4371.41th
4185.38th
3668.45th
3381.38th
2864.45th
2707.32th
2190th
1997.15th
1080th
1030th
788.49th
730th
665th
816.5th
850.75
107th
85th
64th
PCI Slot
PCI Express
Audio Connector Pin1
CORDM
Mini S-Video
Mini S-Video
CORDM Pin1
AudioJack3
AudioJack3
2xUSB_ETH1
2xUSB_ETH1
2xUSB_ETH2
2xUSB_ETH2
USBx2
USBx2
DVI_VGA_Stacked
DDR2, CH. A
CPU FAN
DVI_VGA_Stacked
CPU FAN Pin1
DDR2, CH. B
PS2 KBD / MOUSE
PS2 KBD / MOUSE
COM 1/2 USB 6/7 FLPY LPT Pin 1
PS2 KBD / MOUSE
KBD, MOUSE Pin1
Board Width
ATX Power. Pin1
Floppy CON. Pin1
Feature CON. Pin1
TPM Header Pin1
Battery Holder
RTC RST JMPR
ATX +12V Pin1
Front Panel Pin1
SYS FAN Pin1
SATA 1/2
IDE CON Pin1
Battery Holder
Flash Slot
SATA 1/2
SATA 3/4
Boot Device Select J23 Pin 1
Boot Device Select J40 Pin1
SATA 3/4
Flash Slot
LVDS CON Pin1
Board Height
6700th
6380th
6315th
5774.37th
5765th
5762th
5347.87th
5245th
2815th
2085th
1332.13th
1004th
985th
601.49th
588.62th
575th
365th
178.15th
168.4th
147.01th
37.12th
155.99th
1358th
2248th
3082.5th
3120th
3930th
4100th
4772.5th
5127.8th
5147.5th
5432th
5480th
5500th
5674.13th
5815.87th
5865th
6115th
6351.8th
6588th
343th
270.94th
477th
582th
985.37th
3941.95th
AudioJack3
Mini S-video
Mini S-video
USB_Eth1/2
CORDM
AudioJack3
USB_Eth1/2
Audio Connector Pin1
PCI Slot
Boot Device Select J40 Pin1
Boot Device Select J23 Pin 1
RTC RST JMPR
PCI Express
SATA 1/3
SATA 2/4
Flash Slot
SYS FAN Pin1
ATX +12V Pin1
Battery Holder
Battery Holder
LVDS CON Pin1
IDE CON Pin1
Flash Slot
Front Panel Pin1
1236.18th
1460th
1820th
2348.5th
3763.15th
3780th
3790th
3800th
4000th
4114.88th
4150th
4156.85th
4518.5th
4625.12th
4824.88th
5030th
5255th
5335.12th
6131.5th
6301.26th
6700th
Feature CON. Pin1
TPM Header Pin1
Floppy CON. Pin1
ATX Power. Pin1
Battery Holder
RTC RST JMPR
ATX +12V Pin1
Front Panel Pin1
SYS FAN Pin1
SATA 1/2
IDE CON Pin1
Battery Holder
Flash Slot
SATA 1/2
SATA 3/4
Boot Device Select J23 Pin 1
Boot Device Select J40 Pin1
SATA 3/4
Flash Slot
LVDS CON Pin1
Board Height