


Notes.

1. E=22-φ1.2
2. Any foreign matters such as rust, contamination, dirt must not be attached.
3. This manufacturing process or handing of this material may require special health and/or safety precautions.
4. The side of burrs or hemming of the circumference must be 10% of the board thickness.
5. Unless otherwise specified, the tolerance must be less $\pm 0.15\text{mm}$ or less, angle must be $\pm 5^\circ$ or less.
6. Mark *: critical to function dimension.

REV. NO.	CONTENTS OF CHANGE	MODIFIED BY	APPROVED BY	MM/DD/YYYY
				/ /
				/ /
				/ /
				/ /

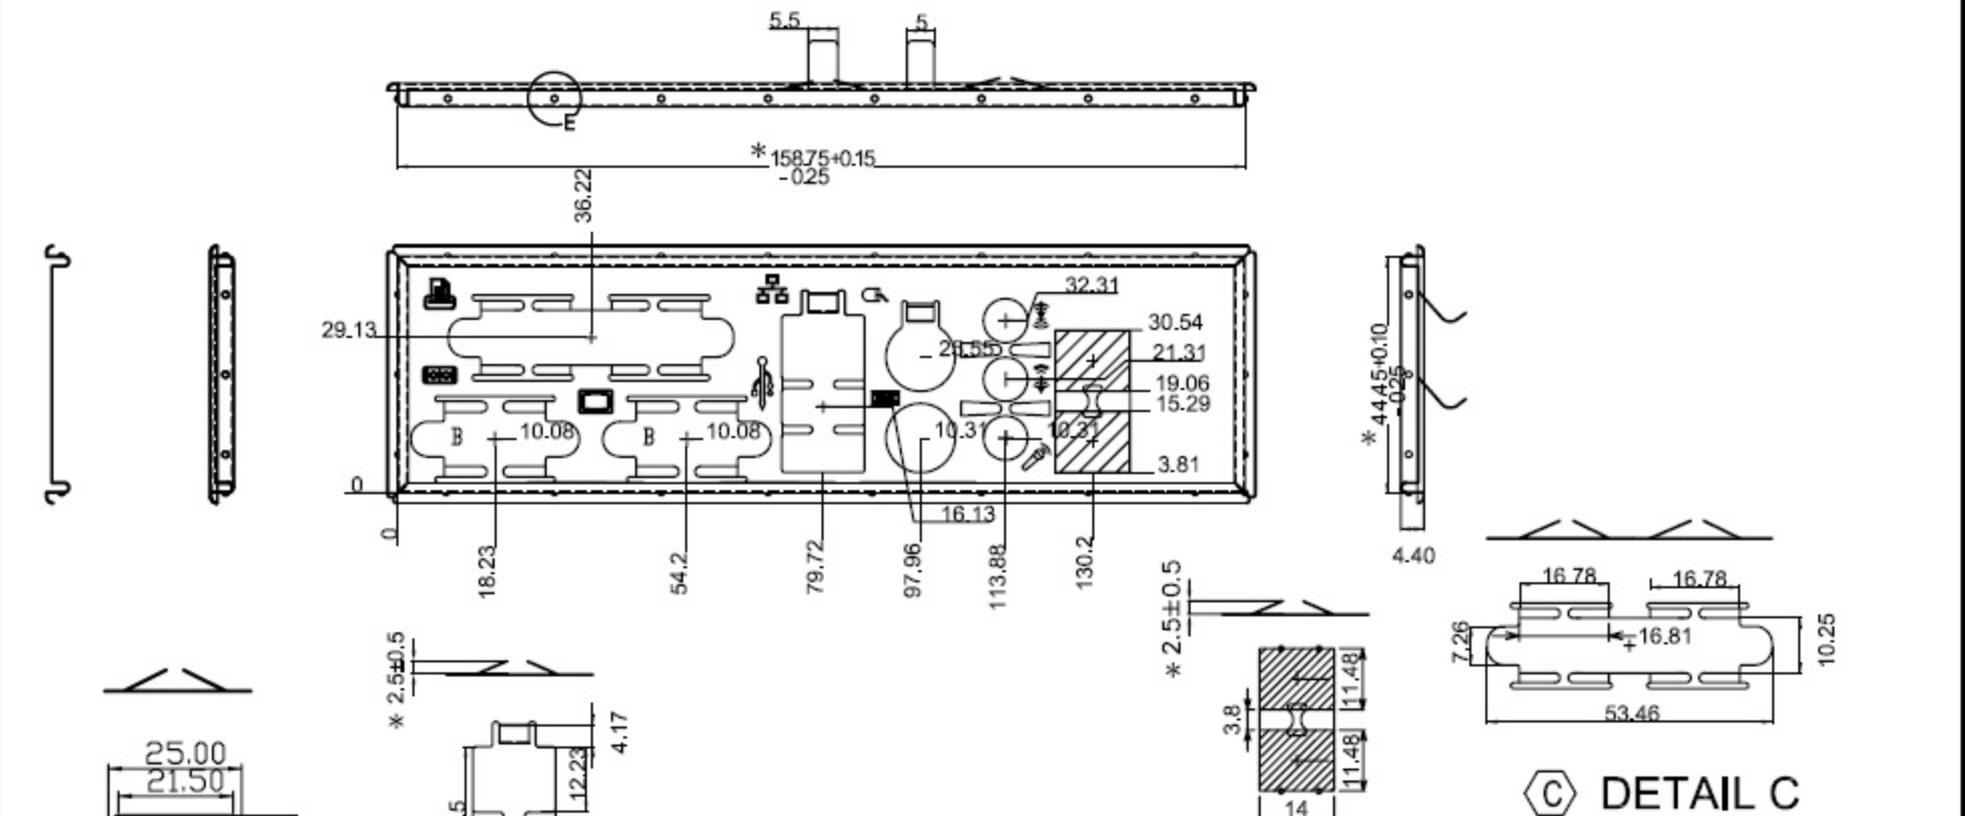

RANGE	TOL.	±0.05	±0.10	±0.15	±0.20	±0.25	±0.30	±0.40	±0.50	±0.60	±0.70	±0.80	±1.00	±1.20	±1.50	±2.00
0-3	0.04	0.06	0.10	0.14	0.18	0.20	0.25	0.30	0.40	0.50	0.60	0.75	1.00	1.20	1.50	2.00
3-6	0.05	0.08	0.12	0.16	0.20	0.25	0.30	0.40	0.50	0.60	0.75	1.00	1.20	1.50	2.00	2.50
6-10	0.06	0.09	0.13	0.17	0.21	0.26	0.31	0.40	0.50	0.60	0.75	1.00	1.20	1.50	2.00	2.50
10-15	0.07	0.11	0.15	0.20	0.25	0.30	0.40	0.50	0.60	0.75	1.00	1.20	1.50	2.00	2.50	3.00
15-20	0.08	0.12	0.16	0.21	0.26	0.31	0.40	0.50	0.60	0.75	1.00	1.20	1.50	2.00	2.50	3.00
20-30	0.10	0.15	0.20	0.25	0.30	0.40	0.50	0.60	0.75	1.00	1.20	1.50	2.00	2.50	3.00	3.50
30-50	0.12	0.18	0.24	0.30	0.36	0.45	0.55	0.70	0.90	1.20	1.50	2.00	2.50	3.00	3.50	4.00
50-80	0.15	0.22	0.30	0.38	0.45	0.60	0.75	1.00	1.20	1.50	2.00	2.50	3.00	3.50	4.00	4.50
80-150	0.20	0.30	0.40	0.50	0.60	0.80	1.00	1.20	1.50	2.00	2.50	3.00	3.50	4.00	4.50	5.00
150-315	0.25	0.35	0.45	0.60	0.75	1.00	1.20	1.50	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50
315-	0.30	0.40	0.50	0.75	1.00	1.20	1.50	2.00	2.50	3.00	3.50	4.00	4.50	5.00	5.50	6.00

3RD ANGLE PROJECTION	MATERIAL	SUS301 T=0.2mm	TREATMENT	REV. MARK ①
APPROVED BY /	DRAWING NAME	886LCD M/ITX I/O SHIELD 50100141		
CHECKED BY /	DRAWING NO.	S041512000006G		
DESIGNED BY /TC.Chu	Arima Computer Corp.			
DATE 12.29.2005				

Please, Don't measure dimension on drawing

FILE No. :

SHEET No. OF 1/1