




KT-RT-VD01 KT-RT-DT01 KT-RT-BC02

Quick Start Guide

Copyright ©2015 Kontron AG. All rights reserved.


KT-RT-VD01

Overview

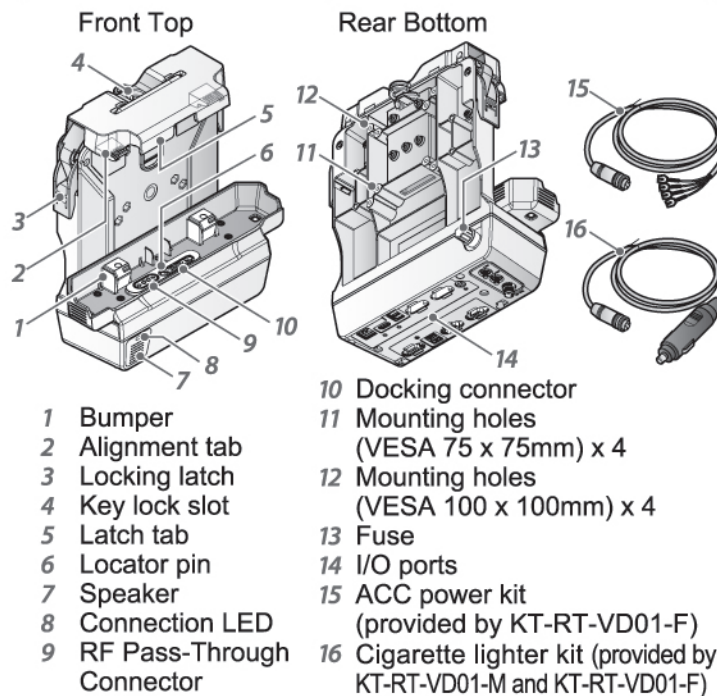


KT-RT-VD01

I/O Ports

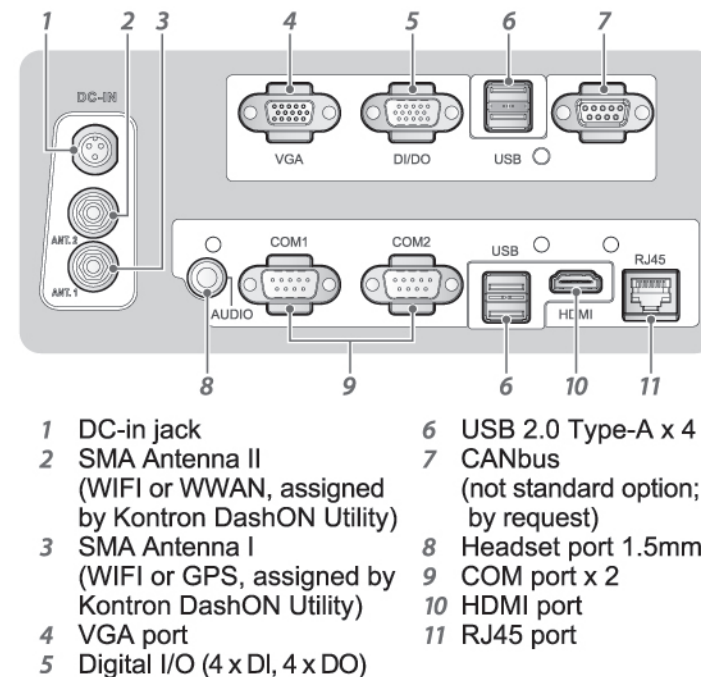

KT-RT-VD01 Specification

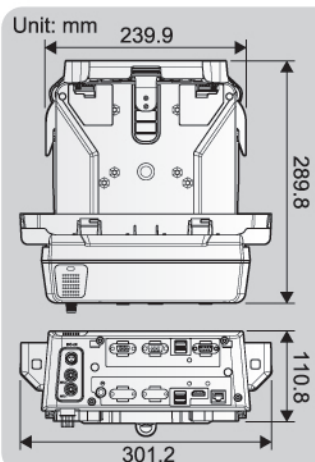

	KT-RT-VD01-M	KT-RT-VD01-S	KT-RT-VD01-F
USB	×	2	4
RS-232	×	×	2
RJ45	×	×	1
VGA	×	×	1
HDMI	×	×	1
Audio	×	×	1
Speaker	×	×	1
SMA antenna	×	2	2
DI/DO	×	×	4xDI; 4xDO
CAN bus	×	×	By Request
DC-in	×	1	1

Output Power 19V @ 1.57A Max., total output 30W

Input Power 9VDC to 32VDC

LED x 1 (Blue)



IP Rating IP54

Operating Temperature Range -10°C (14°F) to 50°C (122°F)

Storage Temperature Range -30°C (-22°F) to 80°C (176°F)


KT-RT-VD01

Installation

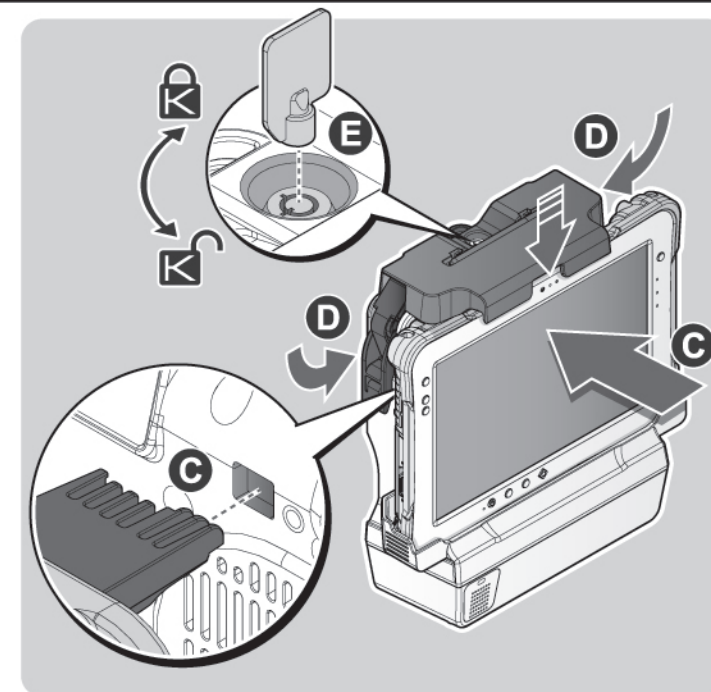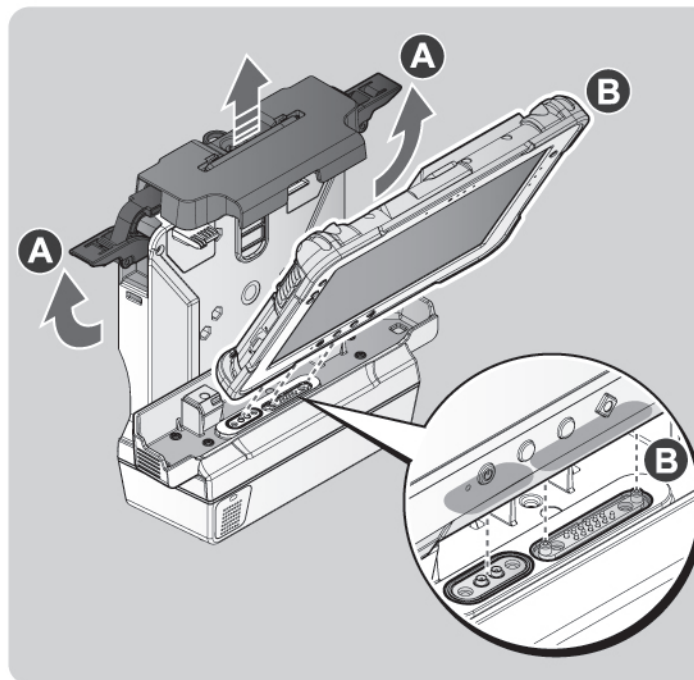


KT-RT-DT01

Overview

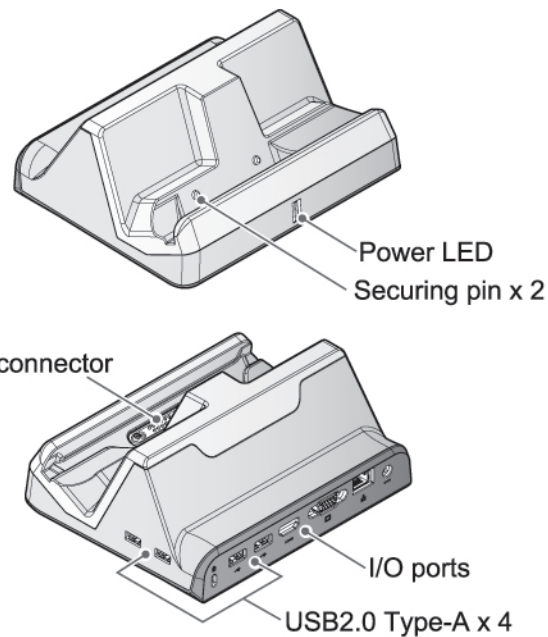

KT-RT-DT01


I/O Ports

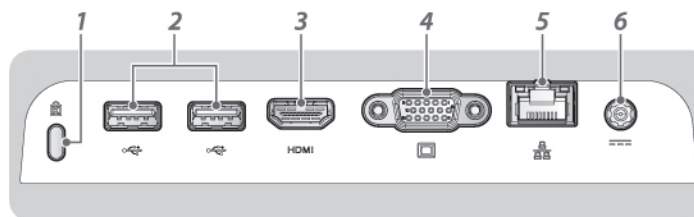

	I/O	KT-RT-DT01-S	KT-RT-DT01-F
1	Kensington® Lock	1	1
2	USB2.0 Type-A	4	4
3	HDMI port	X	1
4	VGA port	X	1
5	RJ45 port	X	1
6	DC-in Jack	1	1


KT-RT-DT01

Charging

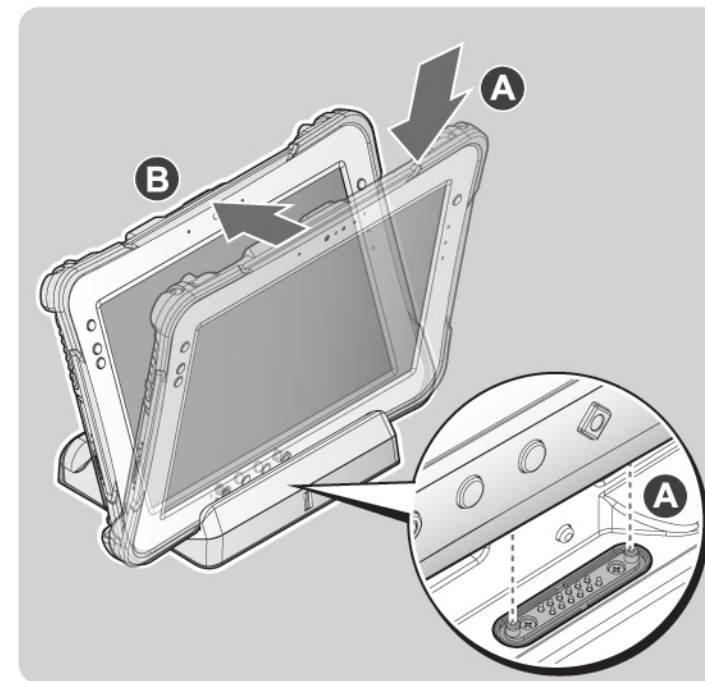

KT-RT-BC02


Overview

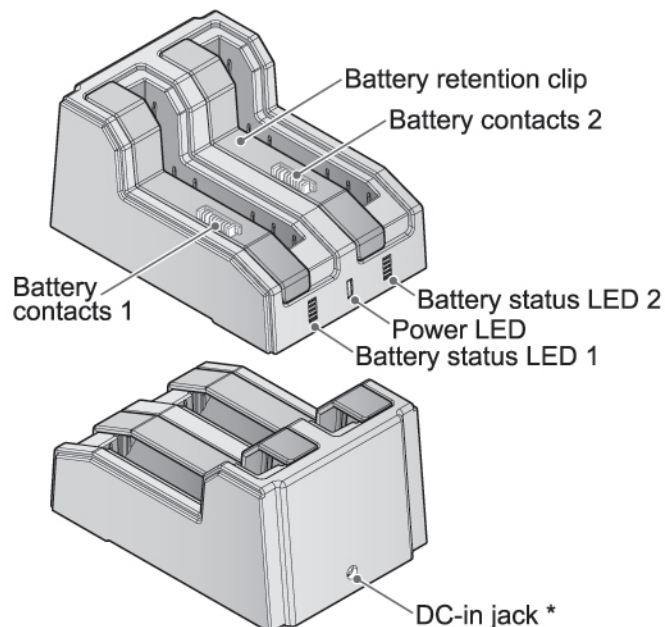

* The KT-RT-BC02 only supports the following AC adapter: Kontron series, 19VDC (3.43A).

KT-RT-BC02

KT-RT-BC02 (9000mAh)

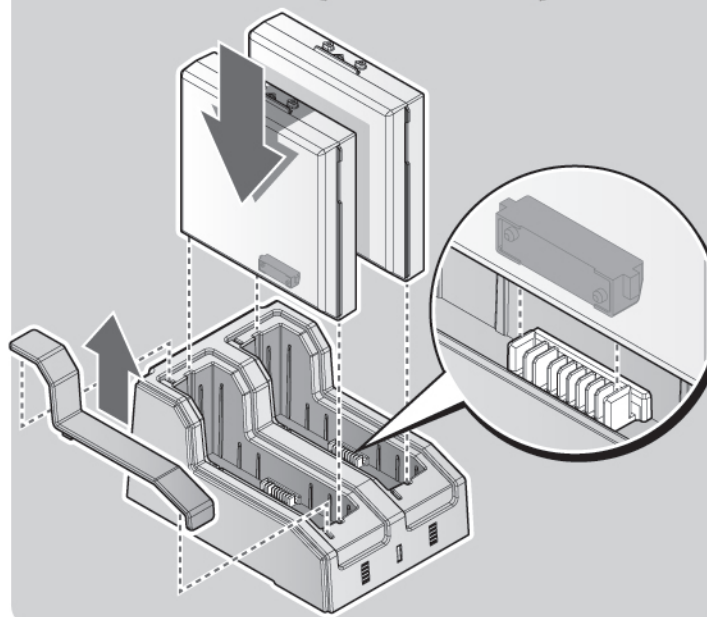

Charging

