

Test report

279276-1TRFEMC

Date of issue: June 4, 2015

Applicant:

Kontron Canada Inc

Product:

Carrier Grade Rack Mount System

Model

CG2300

Specifications:

- ◆ FCC 47 CFR Part 15, Subpart B – Verification
- ◆ ICES-003 Issue 5 August 2012
- ◆ EN 55022: 2010 + AC: 2011
- ◆ CISPR 22: Edition 6.0 2008-09
- ◆ AS/NZS CISPR 22: 2009 + A1: 2010
- ◆ EN 61000-3-2: 2014
- ◆ EN 61000-3-3: 2013




Nemko Canada Inc., a testing laboratory, is accredited by the Standards Council of Canada. The tests included in this report are within the scope of this accreditation

EN 55022 (2010)-CISPR22-FCC-ICES-AS-EN6100032-EN6100033.docx; Date: November 2014

www.nemko.com

Lab and test locations

Company name	Nemko Canada Inc.		
Designation number	CA2040		
Facility Name	Ottawa	Montreal	Almonte
Address	303 River Road	292 Labrosse Ave	1500 Peter Robinson Rd.
City	Ottawa	Pointe-Claire	West Carleton
Province	ON	QC	ON
Postal code	K1V 1H2	H9R 5L8	K0A 1L0
Country	Canada	Canada	Canada
Telephone	+1 613 737 9680	+1 514 694 2684	+1 613 256-9117
Facsimile	+1 613 737 9691	+1 514 694 3528	+1 613 256-8848
Toll free	+1 800 563 6336		
Website	www.nemko.com		

Tested by	Avul Nzenza, EMC Specialist and Daniel Hynes, Senior EMC Specialist
Reviewed by	Kevin Rose, Wireless/EMC Specialist
Review date	June 4, 2015
Reviewer signature	

Limits of responsibility

Note that the results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

This test report has been completed in accordance with the requirements of ISO/IEC 17025. All results contain in this report are within Nemko Canada's ISO/IEC 17025 accreditation.

Copyright notification

Nemko Canada Inc. authorizes the applicant to reproduce this report provided it is reproduced in its entirety and for use by the company's employees only. Any use which a third party makes of this report, or any reliance on or decisions to be made based on it, are the responsibility of such third parties.

Nemko Canada Inc. accepts no responsibility for damages, if any, suffered by any third party as a result of decisions made or actions based on this report.

© Nemko Canada Inc.

Table of Contents

Table of Contents	3
Section 1 Report summary	4
1.1 Test specifications	4
1.2 Exclusions	4
1.3 Statement of compliance.....	4
1.4 Test report revision history.....	4
Section 2 Summary of test results	5
2.1 International test results	5
2.2 North America test results.....	5
Section 3 Equipment under test (EUT) details	6
3.1 Applicant.....	6
3.2 Manufacturer.....	6
3.3 Sample information	6
3.4 EUT information	6
3.5 EUT exercise and monitoring details	7
3.6 EUT setup details	8
Section 4 Engineering considerations	10
4.1 Modifications incorporated in the EUT.....	10
4.2 Technical judgment	10
4.3 Deviations from laboratory tests procedures	10
Section 5 Test conditions	11
5.1 Atmospheric conditions.....	11
5.2 Power supply range	11
Section 6 Measurement uncertainty	12
6.1 Uncertainty of measurement	12
Section 7 Terms and definitions	13
7.1 Product classifications definitions	13
7.2 General definitions	15
Section 8 Testing data	16
8.1 Radiated disturbance.....	16
8.2 Conducted disturbance at mains port	23
8.3 Conducted common mode (asymmetric mode) disturbance at telecommunication port.....	29
8.4 Harmonic current emissions	33
8.5 Voltage fluctuations and flicker	38
Section 9 EUT photos	41
9.1 External photos.....	41

Section 1 Report summary

1.1 Test specifications

FCC 47 CFR Part 15, Subpart B – Verification	Title 47: Telecommunication; Part 15—Radio Frequency Devices
ICES-003 Issue 5 August 2012	Information Technology Equipment (ITE) – Limits and methods of measurement
EN 55022: 2010 + AC: 2011	Information technology equipment Radio disturbance characteristics Limits and methods of measurement
CISPR 22: Edition 6.0 2008-09	Information technology equipment Radio disturbance characteristics Limits and methods of measurement
AS/NZS CISPR 22: 2009 + A1: 2010	Information technology equipment Radio disturbance characteristics Limits and methods of measurement
EN 61000-3-2: 2014	Limits for harmonic current emissions (equipment input current ≤ 16 A per phase)
EN 61000-3-3: 2013	Limitation of voltage changes, voltage fluctuations and flicker in public low-voltage supply systems, for equipment with rated current ≤ 16 A per phase and not subject to conditional connection

1.2 Exclusions

None

1.3 Statement of compliance

In the configuration tested, the EUT was found compliant.

Testing was completed against all relevant requirements of the test standard. Results obtained indicate that the product under test complies in full with the requirements tested. The test results relate only to the items tested.

See “Summary of test results” for full details.

1.4 Test report revision history

Table 1.4-1: Test report revision history

Revision #	Details of changes made to test report
TRF	Original report issued

Section 2 Summary of test results

2.1 International test results

Table 2.1-1: EN 55022: 2010 + AC: 2011, CISPR 22: Edition 6.0 2008-09, AS/NZS CISPR 22: 2009 + A1: 2010 results

Test description	Verdict
Radiated disturbance ¹	Pass
Conducted disturbance at mains port ¹	Pass
Conducted common mode (asymmetric mode) disturbance at telecommunication ports ¹	Pass

Notes: ¹Product classification A

Table 2.1-2: EN 61000-3-2: 2014 results

Test description	Verdict
Harmonic current emissions	Pass

Notes: ¹Harmonic classification A

Table 2.1-3: EN 61000-3-3: 2013 results

Test description	Verdict
Voltage fluctuations and flicker	Pass

Notes: ¹None

2.2 North America test results

Table 2.2-1: FCC 47 CFR Part 15, Subpart B and ICES-003 Issue 5 results

Test description	Verdict
Radiated disturbance ¹	Pass
Conducted disturbance at mains port ¹	Pass

Notes: ¹Product classification A

Section 3 Equipment under test (EUT) details

3.1 Applicant

Company name	Kontron Canada Inc
Address	4555 Ambroise-Lafortune
City	Boisbriand
Province/State	Quebec
Postal/Zip code	J7H 0A4
Country	Canada

3.2 Manufacturer

Company name	Kontron Canada Inc
Address	4555 Ambroise-Lafortune
City	Boisbriand
Province/State	Quebec
Postal/Zip code	J7H 0A4
Country	Canada

3.3 Sample information

Receipt date	February 24, 2015
Nemko sample ID number	133-000142

3.4 EUT information

Product name	Carrier Grade Rack Mount System
Model	CG2300
Serial number	CG23437000
Part number	CG2300A-APP
Power requirements	120/230Vac, 1200W
Description/theory of operation	The Kontron CG2300 is a carrier grade communication rack mount server supporting the Dual Intel® Xeon® E5-2600 v3 16-Core Series (32C, 64T per 2S E5 system). Features include: 16 slot, 8 channel support of DDR4 RDIMM/LRDIMM; Supports 2048GB maximum (with 128GB DIMM) Optimized for PCI-E IO card implementation with PCI-E riser and LP card support; Hot-Swap 2.5" SAS HDDs / SATA SSDs Hot swap, redundant fans Integrated BMC (iBMC) with advanced options Front panel: 1 serial, 1 USB 2.0 Rear panel: 2 USB 2.0, 2x USB 3.0, 1 onboard management NIC port Dual rear GbE NIC ports
Operational frequencies	32.768 kHz, 25 MHz, 33.33 MHz, 48 MHz, 50 MHz, 100 MHz, 125 MHz, 240 MHz, 625 MHz, 1.5 GHz, 1.5625 GHz, 2.5 GHz, 3 GHz, 4 GHz, 4.8 GHz, 5.15625 GHz and 6 GHz.
Software details	Linux Centos

3.5 EUT exercise and monitoring details

Iperf3 generates and monitors traffic, and Burnin exercises and monitors all modules in the system.

3.6 EUT setup details

Table 3.6-1: EUT sub assemblies

Description	Brand name	Model/Part number	Serial number	Rev.
Network Interface Card 4 port GbE	Intel	I350T4	LAB03383	--
AC-DC Power Supply	3Y	YM-2851VA01R	SA000N871504000028	A00
AC-DC Power Supply for surge retest	3Y	YM-2851VA01R	SA000N871504000033	A01

Table 3.6-2: EUT interface ports

Description	Qty.
RJ-45 GbE	2
RJ-45 GbE Management	1
DB15 RS-232	1
USB2	2
USB3	2
VGA	1

Table 3.6-3: Support equipment

Description	Brand name	Model/Part number	Serial number	Rev.
CG2300	Kontron	CG2300-BPP	CG23449013	--
AC-DC Power supply	3Y	YM-2651RA02R	SB000G831440004326	
Network Interface Card 4 port GbE	Intel	I350T4	3585822246	--
LCD Monitor	Dell	E173FPI	CN-0D5428-72872-588-9R65	A02
USB Keyboard	Viewsonic	VSACC27936-1M	GA1053107436	--
USB Mouse	Logitech	M-BJ58	CA34929092	--

Table 3.6-4: Inter-connection cables

Cable description	From	To	Length (m)
CATS UTP	Ethernet Port 1 EUT	Ethernet Port 1 Support Equip.	7
CATS UTP	Ethernet Port 2 EUT	Ethernet Port 2 Support Equip.	7
CATS UTP	Server Adapter Port 1 EUT	Server Adapter Port 1 Support	7
CATS UTP	Server Adapter Port 2 EUT	Server Adapter Port 2 Support	7
CATS UTP	Server Adapter Port 3 EUT	Server Adapter Port 3 Support	7
CATS UTP	Server Adapter Port 4 EUT	Server Adapter Port 4 Support	7
VGA Video Cable Shielded with ferrites both ends	VGA Port EUT	Monitor	2
AC Power Cable (unshielded)	Power Supply 1	AC Power Supply	2
AC Power Cable (unshielded)	Power Supply 2	AC Power Supply	2

Section 4 Engineering considerations

4.1 Modifications incorporated in the EUT

There were no modifications performed to the EUT during this assessment.

4.2 Technical judgment

None

4.3 Deviations from laboratory tests procedures

No deviations were made from laboratory procedures.

Section 5 Test conditions

5.1 Atmospheric conditions

Temperature	15–30 °C
Relative humidity	20–75 %
Air pressure	86–106 kPa

When it is impracticable to carry out tests under these conditions, a note to this effect stating the ambient temperature and relative humidity during the tests shall be recorded and stated.

5.2 Power supply range

The normal test voltage for equipment to be connected to the mains shall be the nominal mains voltage. For the purpose of the present document, the nominal voltage shall be the declared voltage, or any of the declared voltages $\pm 5\%$, for which the equipment was designed.

Section 6 Measurement uncertainty

6.1 Uncertainty of measurement

Nemko Canada Inc. has calculated measurement uncertainty and is documented in EMC/MUC/001 "Uncertainty in EMC measurements." Measurement uncertainty was calculated using the methods described in CISPR 16-4 Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC measurements; as well as described in UKAS LAB34: The expression of Uncertainty in EMC Testing. Measurement uncertainty calculations assume a coverage factor of $K=2$ with 95% certainty.

Section 7 Terms and definitions

7.1 Product classifications definitions

7.1.1 Title 47: Telecommunication – Part 15-Radio Frequency devices, Subpart A – General

Class A digital device	A digital device that is marketed for use in a commercial, industrial or business environment, exclusive of a device which is marketed for use by the general public or is intended to be used in the home.
Class B digital device	<p>A digital device that is marketed for use in a residential environment notwithstanding use in commercial, business and industrial environments. Examples of such devices include, but are not limited to, personal computers, calculators, and similar electronic devices that are marketed for use by the general public.</p> <p>Note: The responsible party may also qualify a device intended to be marketed in a commercial, business or industrial environment as a Class B device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B digital device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B digital device, regardless of its intended use.</p>

7.1.2 EN 55022, AS/NZS CISPR 22, and CISPR 22

Class B ITE	<p>ITE (Information technology equipment) is intended primarily for use in the domestic environment and may include:</p> <ul style="list-style-type: none"> – Equipment with no fixed place of use; for example, portable equipment powered by built-in batteries; – Telecommunication terminal equipment powered by a telecommunication network; – Personal computers and auxiliary connected equipment.
Class A ITE	<p>is a category of all other ITE, which satisfies the class A ITE limits but not the class B ITE limits. Such equipment should not be restricted in its sale but the following warning shall be included in the instructions for use:</p> <p>WARNING</p> <p>This is a class A product. In a domestic environment this product may cause radio interference in which case the user may be required to take adequate measures.</p>

7.1.3 ICES-003

Class B ITE	limits of radio noise for ITE for residential operation
Class A ITE	limits of radio noise for ITE for non-residential operation
Conditions	<p>Only ITE intended strictly for non-residential use in commercial, industrial or business environments, and whose design or other characteristics strongly preclude the possibility of its use in a residential environment, shall be permitted to comply with the less stringent Class A limits.</p> <p>All ITE that cannot meet the conditions for Class A operation shall comply with the Class B limits.</p> <p>The ITE shall comply with both the power line – conducted and the radiated emissions limits within the same Class, with no intermixing.</p>

7.1 Product classifications definitions, continued

7.1.4 EN 61000-3-2

For the purpose of harmonic current limitation, equipment is classified as follows:

Class A	<ul style="list-style-type: none"> – Balanced three-phase equipment; – Household appliances excluding equipment identified as Class D; – Tools excluding portable tools; – Dimmers for incandescent lamps; – Audio equipment. <p>Equipment not specified in one of the three other classes shall be considered as Class A equipment.</p>
Class B	<ul style="list-style-type: none"> – Portable tools; – Arc welding equipment, which is not professional equipment.
Class C	<ul style="list-style-type: none"> – Lighting equipment.
Class D	<p>Equipment having a specified power according to 6.2.2 less than or equal to 600 W, of the following types:</p> <ul style="list-style-type: none"> – Personal computers and personal computer monitors; – Television receivers.

7.2 General definitions

7.2.1 Title 47: Telecommunication – Part 15-Radio Frequency devices, Subpart A – General

Digital device (Previously defined as a computing device)	<p>An unintentional radiator (device or system) that generates and uses timing signals or pulses at a rate in excess of 9,000 pulses (cycles) per second and uses digital techniques; inclusive of telephone equipment that uses digital techniques or any device or system that generates and uses radio frequency energy for the purpose of performing data processing functions, such as electronic computations, operations, transformations, recording, filing, sorting, storage, retrieval, or transfer. A radio frequency device that is specifically subject to an emanation requirement in any other FCC Rule part or an intentional radiator subject to subpart C of this part that contains a digital device is not subject to the standards for digital devices, provided the digital device is used only to enable operation of the radio frequency device and the digital device does not control additional functions or capabilities.</p> <p>Note: Computer terminals and peripherals that are intended to be connected to a computer are digital devices.</p>
-----------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

7.2.2 EN 55022, AS/NZS CISPR 22, and CISPR 22

Information technology equipment (ITE)	<p>Any equipment:</p> <p>a) Which has a primary function of either (or a combination of) entry, storage, display, retrieval, transmission, processing, switching, or control, of data and of telecommunication messages and which may be equipped with one or more terminal ports typically operated for information transfer;</p> <p>b) With a rated supply voltage not exceeding 600 V.</p> <p>It includes, for example, data processing equipment, office machines, electronic business equipment and telecommunication equipment.</p>
Telecommunications/network port	<p>Point of connection for voice, data and signaling transfers intended to interconnect widely dispersed systems via such means as direct connection to multi-user telecommunications networks (e.g. public switched telecommunications networks (PSTN) integrated services digital networks (ISDN), x-type digital subscriber lines (xDSL), etc.), local area networks (e.g. Ethernet, Token Ring, etc.) and similar networks</p> <p>NOTE A port generally intended for interconnection of components of an ITE system under test (e.g. RS-232, IEEE Standard 1284 (parallel printer), Universal Serial Bus (USB), IEEE Standard 1394 ("Fire Wire"), etc.) and used in accordance with its functional specifications (e.g. for the maximum length of cable connected to it), is not considered to be a telecommunications/network port under this definition.</p>

7.2.1 ICES-003

Information technology equipment (ITE)	<p>Information Technology Equipment (ITE) is defined as devices or systems that use digital techniques for purposes such as data processing and computation. ITE is any unintentional radiator (device or system) that generates and/or uses timing signals or pulses having a rate of at least 9 kHz and employs digital techniques for purposes such as computation, display, data processing and storage, and control.</p>
----------------------------------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

7.2.2 EN 61000-3-3

Voltage fluctuation	Series of changes of r.m.s voltage evaluated as a single value for each successive half-period between zero-crossings of the source voltage.
Flicker	Impression of unsteadiness of visual sensation induced by a light stimulus whose luminance or spectral distribution fluctuates with time.
Short-term flicker indicator, <i>P_{st}</i>	The flicker severity evaluated over a short period (in minutes); <i>P_{st}</i> = 1 is the conventional threshold of irritability.
Long-term flicker indicator, <i>Plt</i>	The flicker severity evaluated over a long period (a few hours) using successive <i>P_{st}</i> values.

Section 8 Testing data

8.1 Radiated disturbance

8.1.1 References

CISPR 22 and ANSI C63.4-2003

8.1.2 Test summary

Verdict	Pass		
Test date	February 24, 2015	Temperature	24 °C
Test engineer	Avul Nzenza	Air pressure	1009 mbar
Test location	Montreal	Relative humidity	34 %

8.1.3 Notes

None

8.1.4 Setup details

EUT setup configuration	Table top
Test facility	3 m Semi anechoic chamber
Measuring distance	3 m
Antenna height variation	1–4 m
Turn table position	0–360°
Measurement details	A preview measurement was generated with receiver in continuous scan or sweep mode while the EUT was rotated and antenna adjusted to maximize radiated emission. Emissions detected within 6 dB or above limit were re-measured with the appropriate detector against the correlating limit and recorded as the final measurement.

Receiver/spectrum analyzer settings for frequencies below 1 GHz:

Resolution bandwidth	120 kHz
Video bandwidth	300 kHz
Detector mode	Peak (preview measurement); Quasi-peak (final measurement)
Trace mode	Max Hold
Measurement time	100 ms (preview measurement); 1000 ms (final measurement)

Receiver/spectrum analyzer settings for frequencies above 1 GHz:

Resolution bandwidth	1 MHz
Video bandwidth	3 MHz
Detector mode	Peak (preview); Peak and Average (final)
Trace mode	Max Hold
Measurement time	100 ms (preview); 1000 ms (final)

8.1.4 Setup details, continued

Table 8.1-1: Radiated disturbance equipment list

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
3 m EMI test chamber	TDK	SAC-3	FA002532	1 year	Sept. 16/15
Flush mount turntable	Sunol	FM2022	FA002550	—	NCR
Controller	Sunol	SC104V	FA002551	—	NCR
Antenna mast	Sunol	TLT2	FA002552	—	NCR
Receiver/spectrum analyzer	Rohde & Schwarz	ESU 40	FA002071	1 year	April 20/15
Bilog antenna (20–2000 MHz)	Sunol	JB1	FA002517	1 year	Aug 19/15
Horn antenna (1–18 GHz)	EMCO	3115	FA001452	1 year	Aug. 28/15
Horn antenna (18–40 GHz)	EMCO	3116	FA002487	1 year	July 9/15
Pre-amplifier (0.5–18 GHz)	COM-POWER	PAM-118A	FA002561	1 year	July 9/15
Pre-amplifier (18–40 GHz)	COM-POWER	PAM-840	FA002508	1 year	July 9/15


Notes: NCR - no calibration required

Table 8.1-2: Radiated disturbance test software details

Manufacturer of Software	Details
Rhode & Schwarz	EMC32, Software for EMC Measurements, Version 8.53.0

Notes: None

8.1.5 Test data

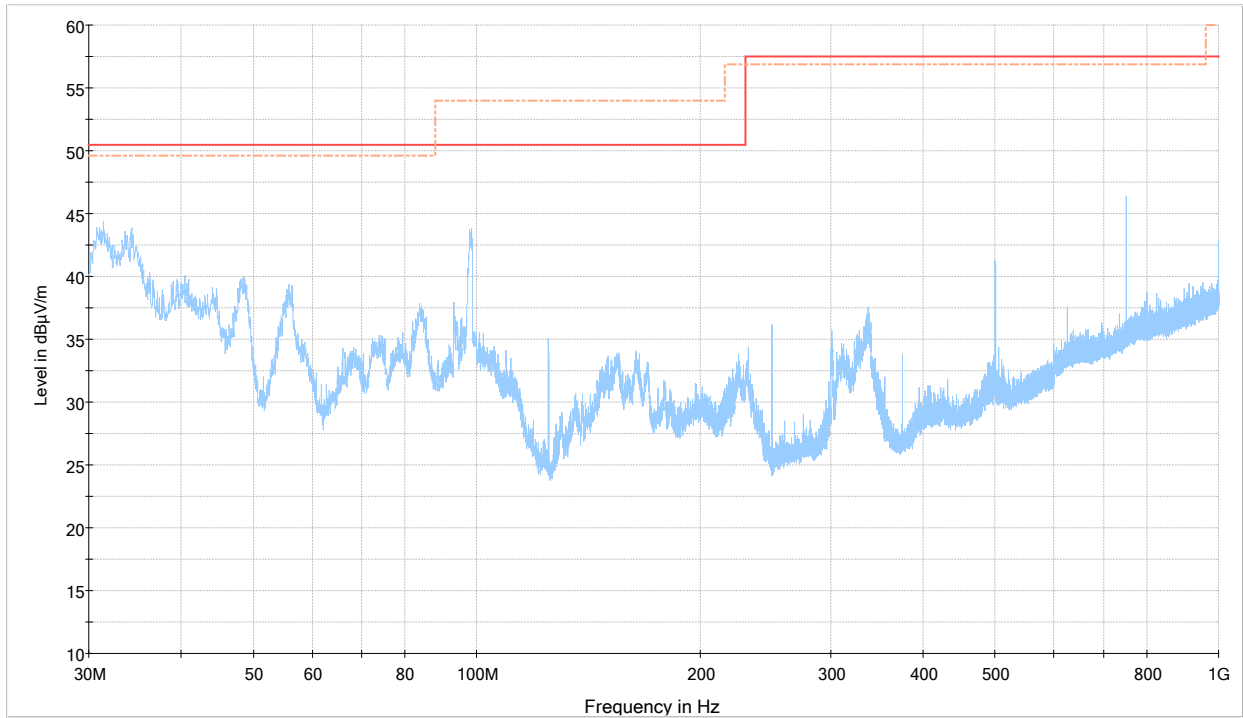

279276_Rad Em_CG2300_1G_Feb 24_2015


- CISPR 22 - Class A 3m QP
- - - FCC Part 15 - Class A 3m QP and Average
- Preview Result 1-PK+

The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).

An inverse proportionality factor of 20 dB per decade ($20 \log(10/3) = 10.5 \text{ dB}$) has been used to normalize the specification limit to a measurement distance of 3 meters

Figure 8.1-1: Radiated disturbance spectral plot (30 to 1000 MHz)

8.1.5 Test data, continued

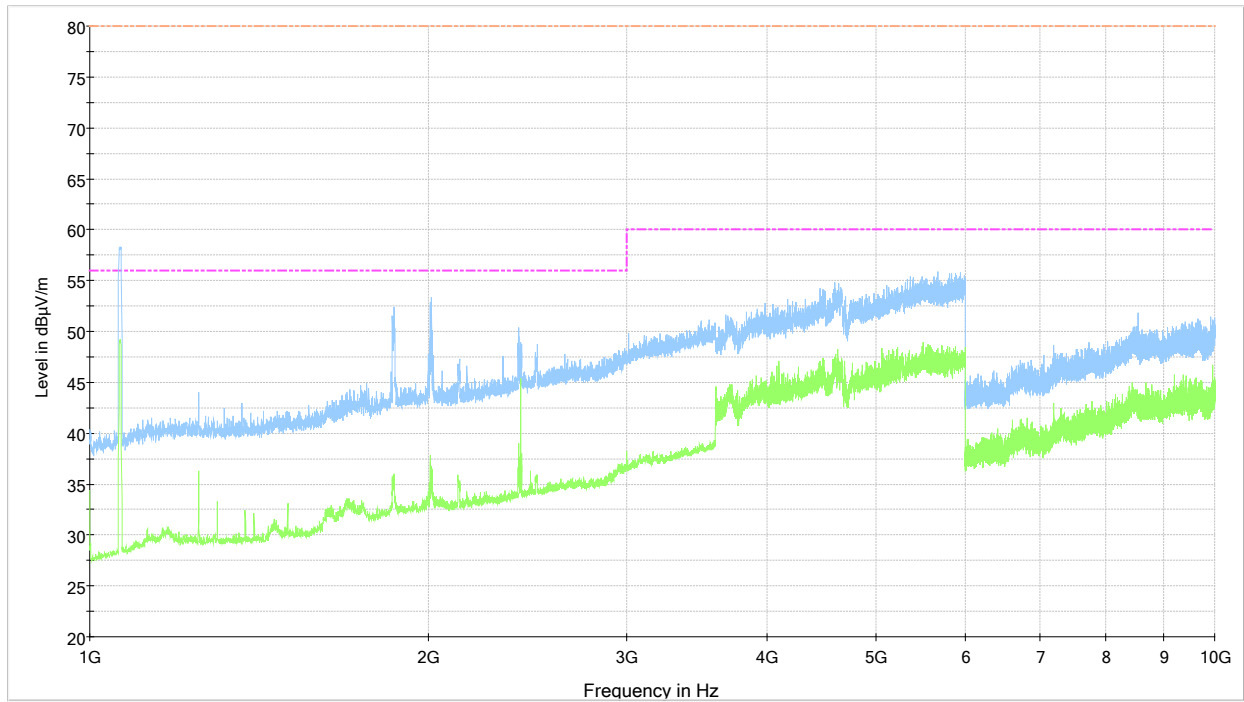


279276_Rad Em_CG2300_10GHz_Feb 24_2015

- FCC Part 15 - Class A 3m Peak above 1GHz
- CISPR22 and FCC combo - Class A 3m Average
- Preview Result 1-PK+
- Preview Result 2-AVG

The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).

Figure 8.1-2: Radiated disturbance spectral plot (1 to 10GHz)

8.1.5 Test data, continued

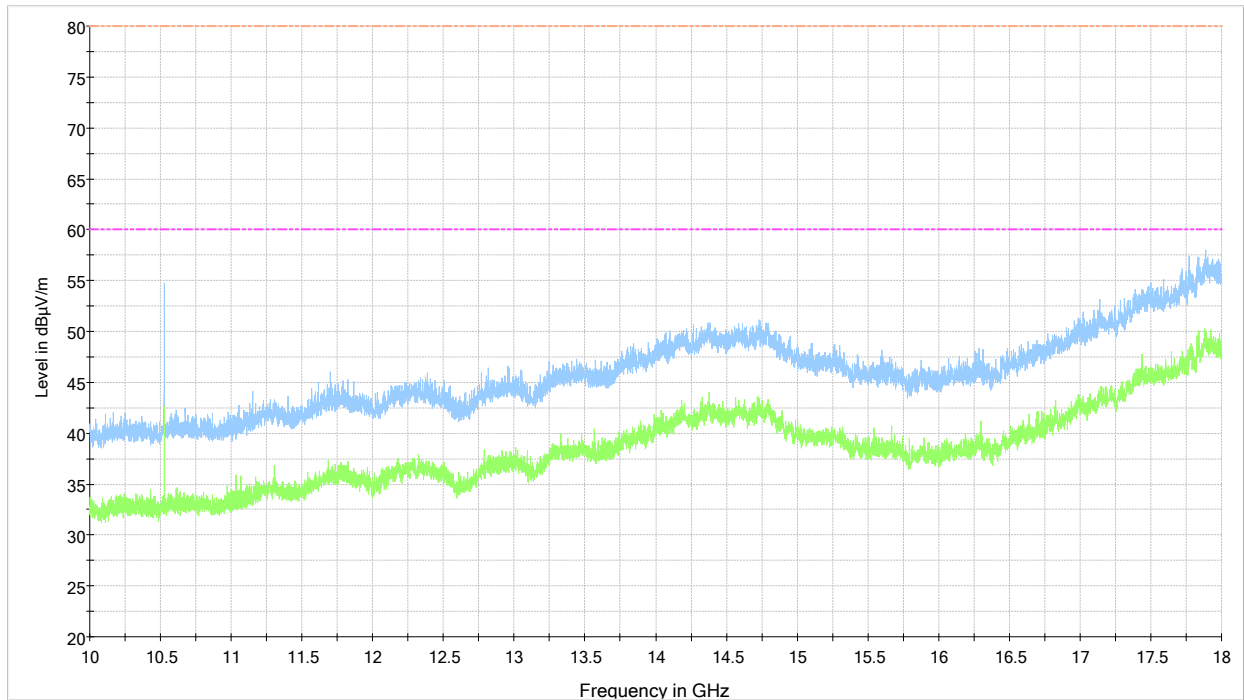


279276_Rad Em_CG2300_18GHz_Feb 24_2015

- FCC Part 15 - Class A 3m Peak above 1GHz
- CISPR22 and FCC combo - Class A 3m Average
- Preview Result 1-PK+
- Preview Result 2-AVG

The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).

Figure 8.1-3: Radiated disturbance spectral plot (10 to 18GHz)

8.1.5 Test data, continued

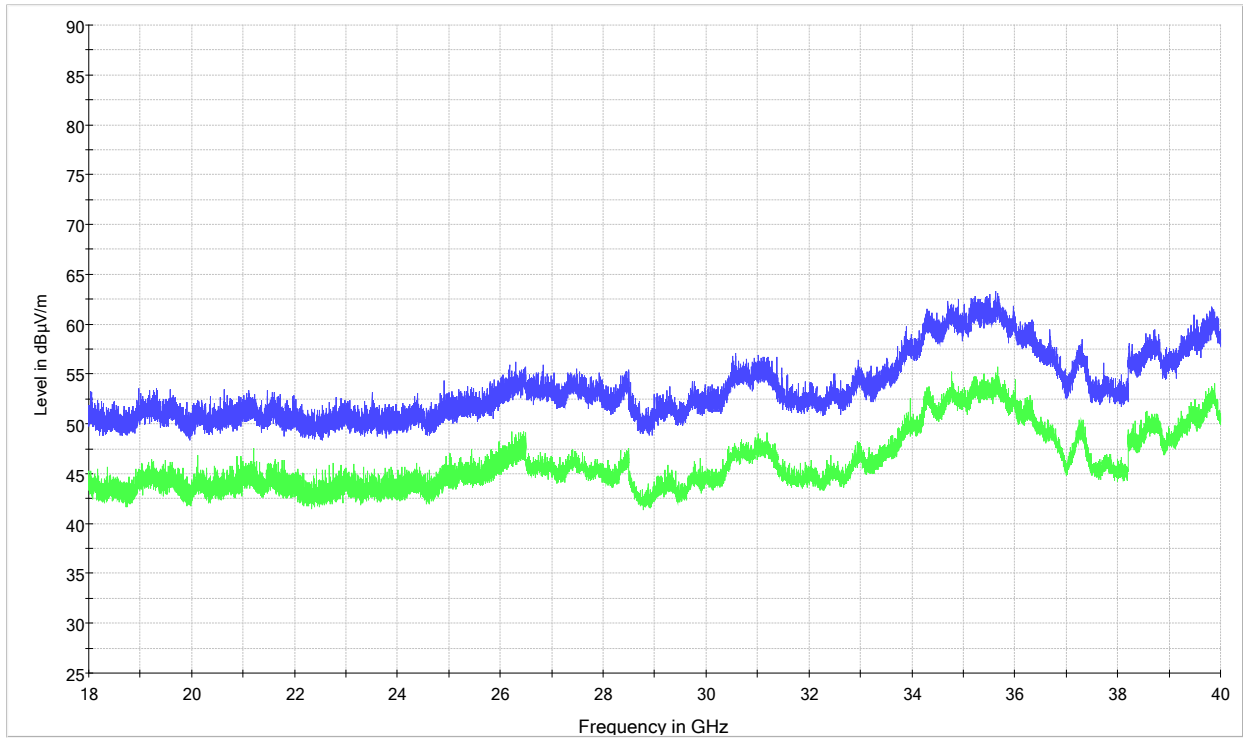

279276_Rad Em_CG2300_40GHz_Feb 24_2015

— MaxPeak-MaxHold-PK+
— Average-MaxHold-AVG

The spectral plot is a summation of a vertical and horizontal scan. The spectral scan has been corrected with the associated transducer factors (i.e. antenna factors, cable loss, amplifier gains, and attenuators).

Figure 8.1-4: Radiated disturbance spectral plot (18 to 40GHz)

8.1.6 Setup photos



Figure 8.1-5: Radiated disturbance setup photo

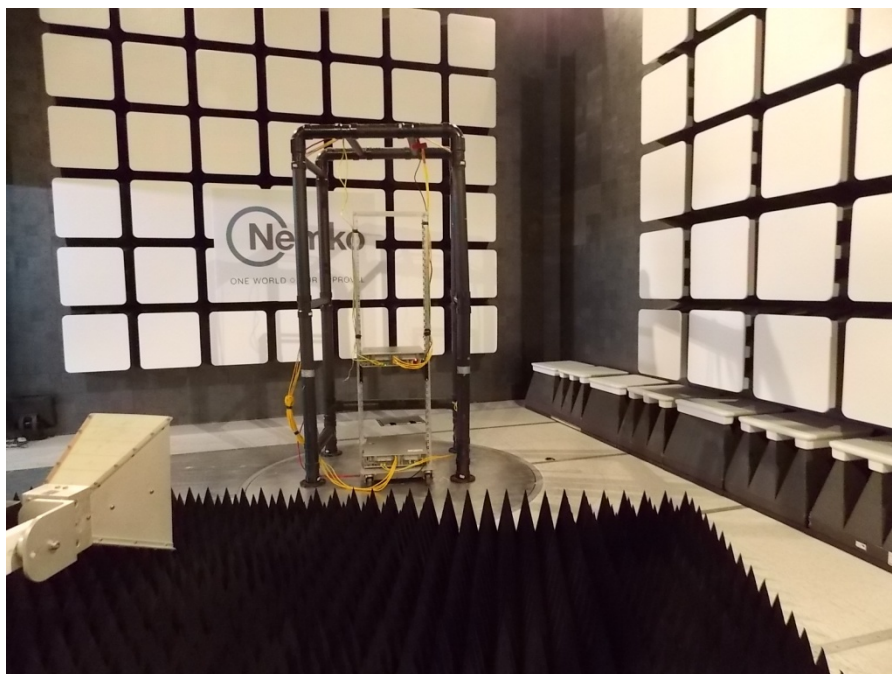


Figure 8.1-6: Radiated disturbance setup photo

8.2 Conducted disturbance at mains port

8.2.1 References

CISPR 22 and ANSI C63.4-2003

8.2.2 Test summary

Verdict	Pass		
Test date	May 26, 2015	Temperature	23.6 °C
Test engineer	Daniel Hynes	Air pressure	1010.6 mbar
Test location	Montreal	Relative humidity	57.0 %

8.2.3 Notes

None

8.2.4 Setup details

Port under test	AC Mains
EUT setup configuration	Floor standing
Measurement details	A preview measurement was generated with the receiver in continuous scan mode. Emissions detected within 6 dB or above limit were re-measured with the appropriate detector against the correlating limit and recorded as the final measurement.

Receiver settings:

Resolution bandwidth	9 kHz
Video bandwidth	30 kHz
Detector mode	Peak and Average (preview measurement); Quasi-peak and Average (final measurement)
Trace mode	Max Hold
Measurement time	100 ms (preview measurement); 1000 ms (final measurement)

Table 8.2-1: Conducted disturbance at mains port equipment list

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
Receiver/spectrum analyzer	Rohde & Schwarz	ESU 40	FA002071	1 year	April 7/16
Power source	California Instruments	5001ix	FA002494	1 year	Jan. 22/16
LISN	Rohde & Schwarz	ENV216	FA002515	1 year	July 14/15


Notes: None

Table 8.2-2: Conducted disturbance at mains port test software details

Manufacturer of Software	Details
Rhode & Schwarz	EMC32, Software for EMC Measurements, Version 8.53.0

Notes: None

8.2.5 Test data

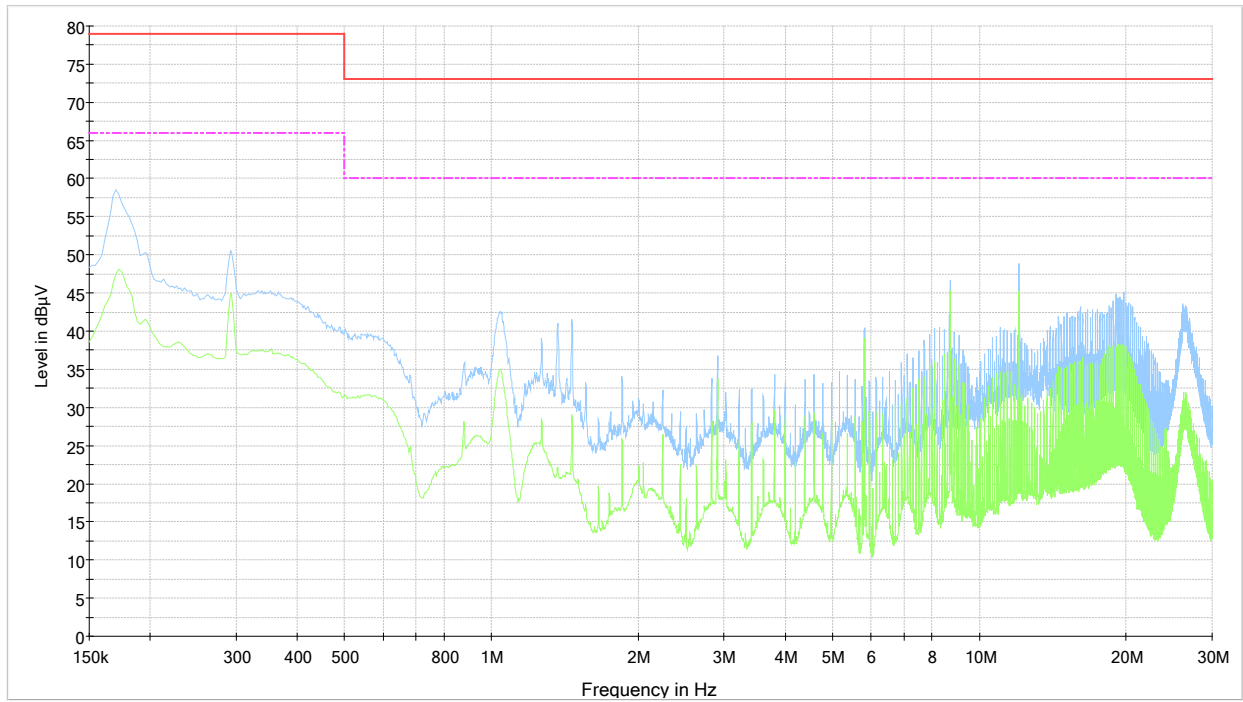


5R279276 - May 26, 2015 - Modified 3Y PSU - 230 VAC, 50 Hz - Phase

- CISPR 22 Mains QP Class A
- - - CISPR 22 Mains AV Class A
- Preview Result 1-PK+
- Preview Result 2-AVG

The spectral plot has been corrected with transducer factors. (i.e. cable loss, LISN factors, and attenuators)

Figure 8.2-1: Conducted disturbance at mains port spectral plot on phase line

8.2.5 Test data, continued

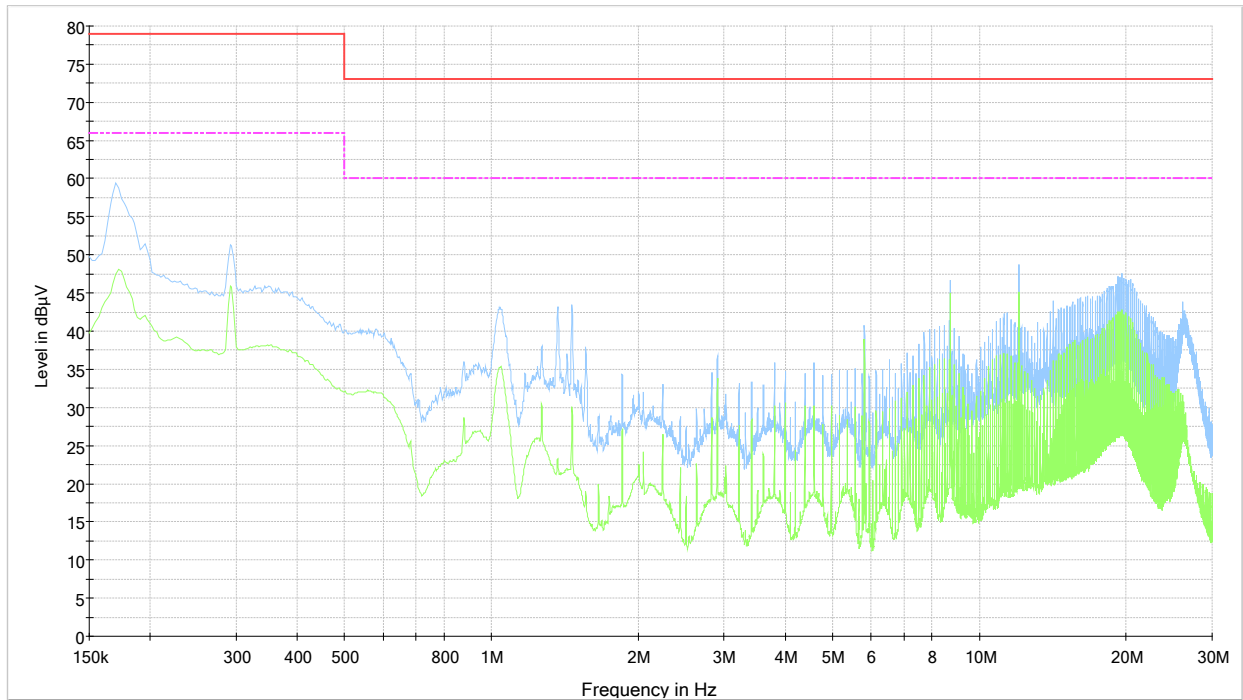


5R279276 - May 26, 2015 - Modified 3Y PSU - 230 VAC, 50 Hz - Neutral

- CISPR 22 Mains QP Class A
- - - CISPR 22 Mains AV Class A
- Preview Result 1-PK+
- Preview Result 2-AVG

The spectral plot has been corrected with transducer factors. (i.e. cable loss, LISN factors, and attenuators)

Figure 8.2-2: Conducted disturbance at mains port spectral plot on neutral line

8.2.5 Test data, continued

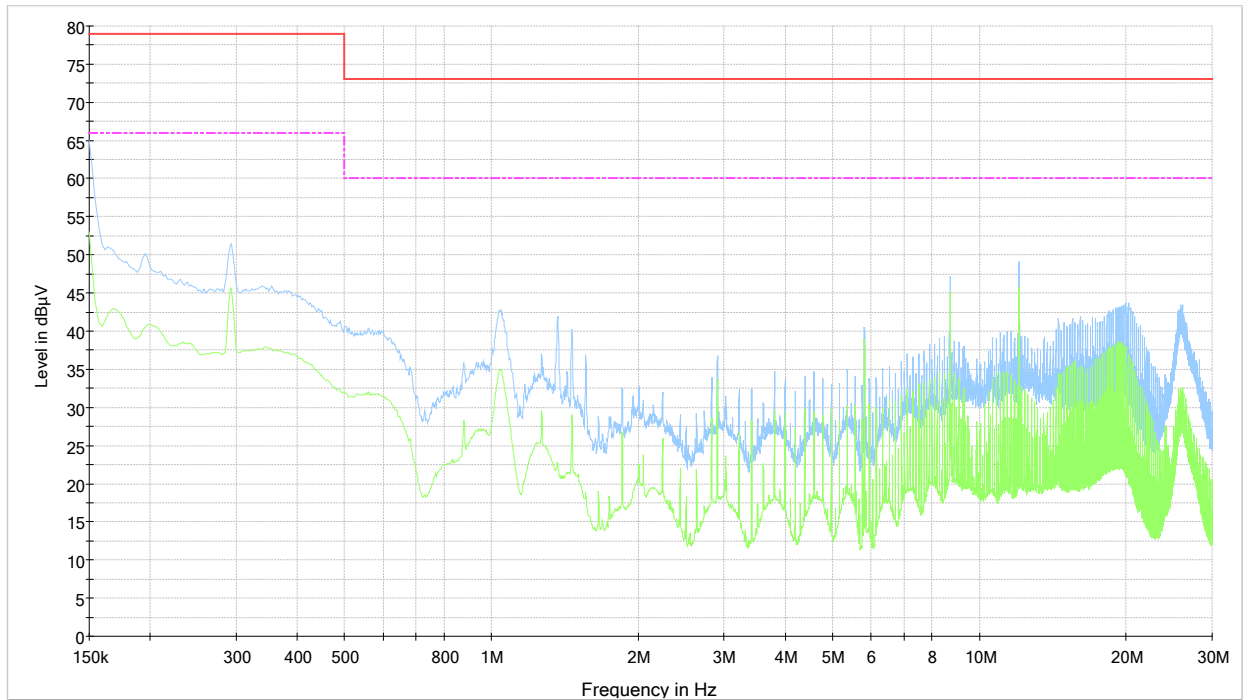


5R279276 - May 26, 2015 - Modified 3Y PSU - 120 VAC, 60 Hz - Phase

- CISPR 22 Mains QP Class A
- - - CISPR 22 Mains AV Class A
- Preview Result 1-PK+
- Preview Result 2-AVG

The spectral plot has been corrected with transducer factors. (i.e. cable loss, LISN factors, and attenuators)

Figure 8.2-3: Conducted disturbance at mains port spectral plot on phase line

8.2.5 Test data, continued

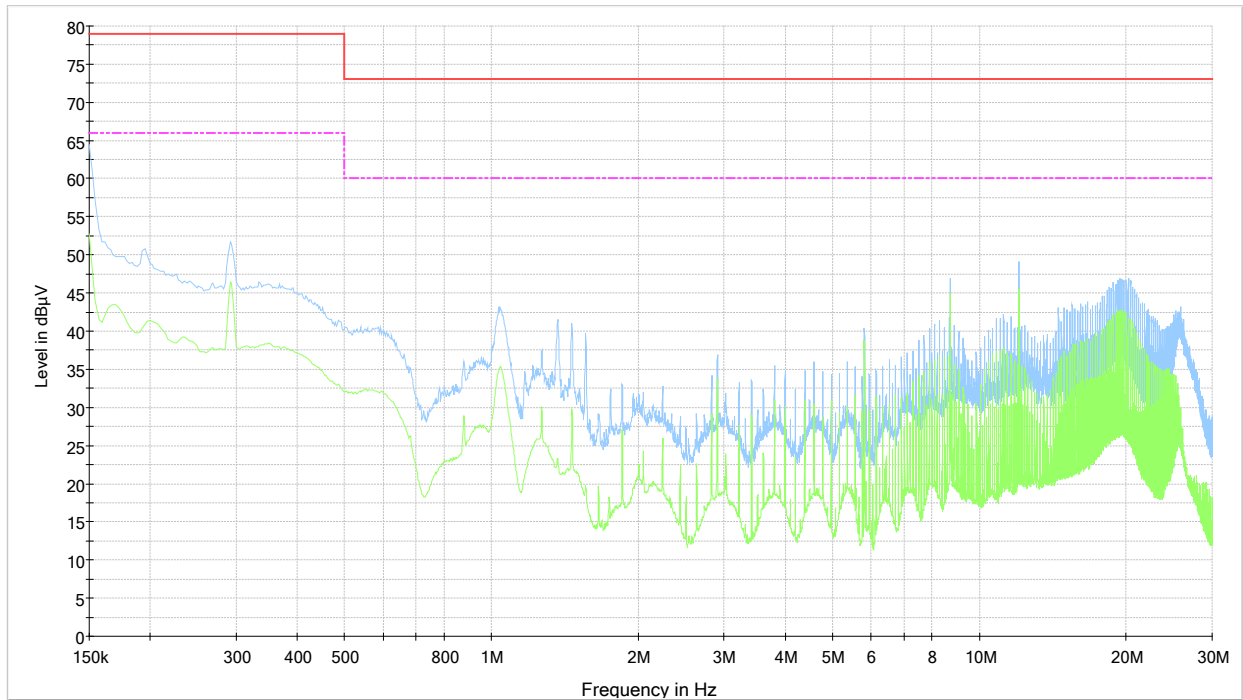

5R279276 - May 26, 2015 - Modified 3Y PSU - 120 VAC, 60 Hz - Neutral

- CISPR 22 Mains QP Class A
- - - CISPR 22 Mains AV Class A
- Preview Result 1-PK+
- Preview Result 2-AVG

The spectral plot has been corrected with transducer factors. (i.e. cable loss, LISN factors, and attenuators)

Figure 8.2-4: Conducted disturbance at mains port spectral plot on neutral line

8.2.6 Setup photos

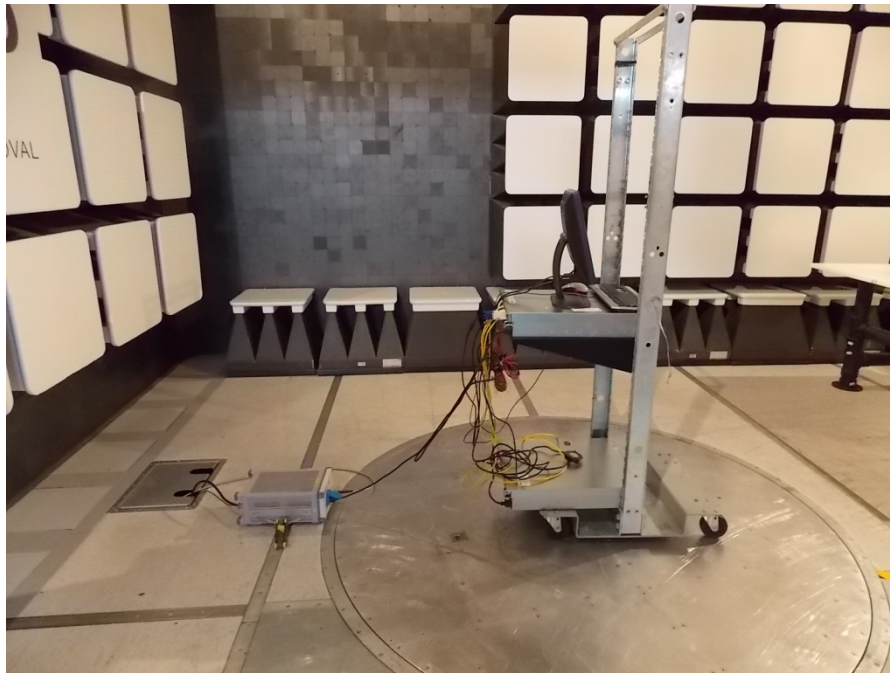


Figure 8.2-5: *Conducted disturbance at mains port setup photo*

8.3 Conducted common mode (asymmetric mode) disturbance at telecommunication port

8.3.1 References

CISPR 22

8.3.2 Test summary

Verdict	Pass		
Test date	February 24, 2015	Temperature	24 °C
Test engineer	Avul Nzenza	Air pressure	1009 mbar
Test location	Montreal	Relative humidity	34 %

8.3.3 Notes

None

8.3.4 Setup details

Port under test	GbE_Motherboard and GbE PCIe ports
EUT setup configuration	Floor standing
Measurement details	A preview measurement was generated with the receiver in continuous scan mode. Emissions detected within 6 dB or above limit were re-measured with the appropriate detector against the correlating limit and recorded as the final measurement.

Receiver settings:

Resolution bandwidth	9 kHz
Video bandwidth	30 kHz
Detector mode	Peak and Average (preview measurement); Quasi-peak and Average (final measurement)
Trace mode	Max Hold
Measurement time	100 ms (preview measurement); 1000 ms (final measurement)

Table 8.3-1: Conducted common mode (asymmetric mode) disturbance at telecommunication port equipment list

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
Receiver/spectrum analyzer	Rohde & Schwarz	ESU 40	FA002071	1 year	April 20/15
CISPR 22 ISN	FCC	F-071115-1057-1-09	FA002249	1 year	July 3/15


Notes: None

Table 8.3-2: Conducted common mode (asymmetric mode) disturbance at telecommunication port test software details

Manufacturer of Software	Details
Rhode & Schwarz	EMC32, Software for EMC Measurements, Version 8.53.0

Notes: None

8.3.5 Test data

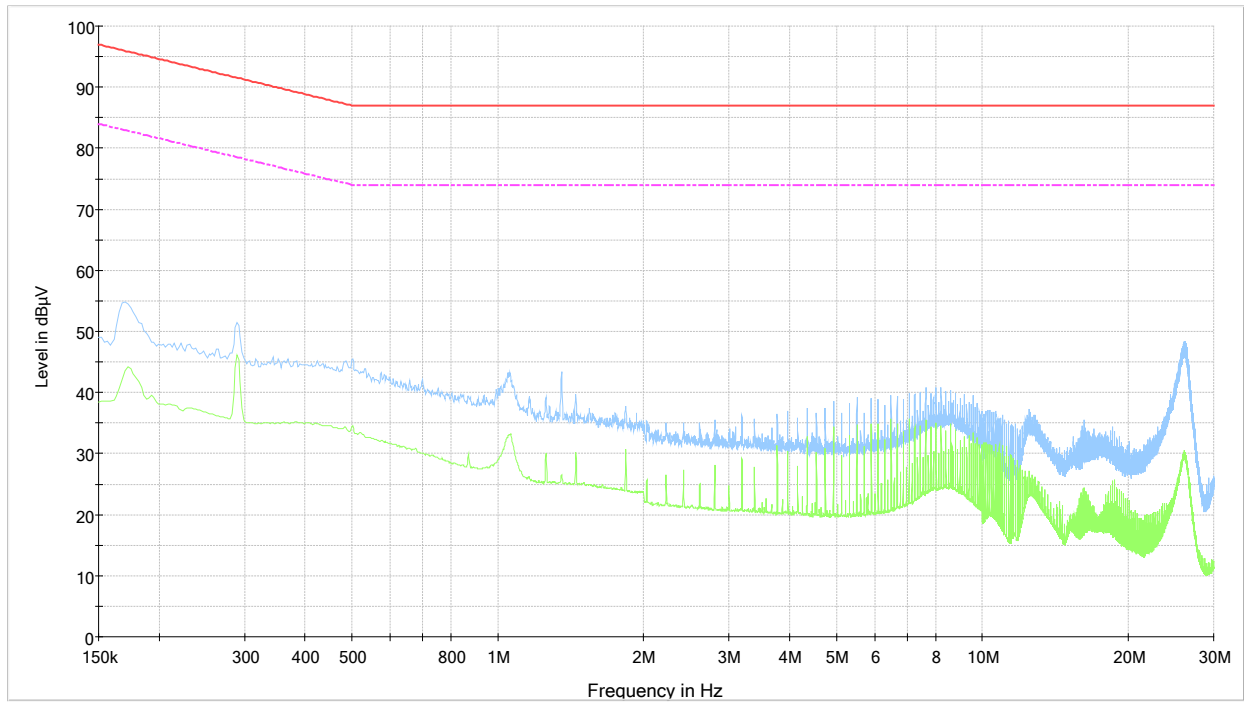


279276_Conduct Em_CG2300_GbE_Motherboard_Port_Feb 24_2015

- CISPR 22 Telecom QP Class A - Voltage
- - - CISPR 22 Telecom AV Class A - Voltage
- Preview Result 1-PK+
- Preview Result 2-AVG

The spectral plot has been corrected with transducer factors. (i.e. cable loss, CDN and probe factor, and attenuators)

Figure 8.3-1: Conducted common mode (asymmetric mode) disturbance at telecommunication port spectral plot on GbE_Motherboard port

8.3.5 Test data, continued

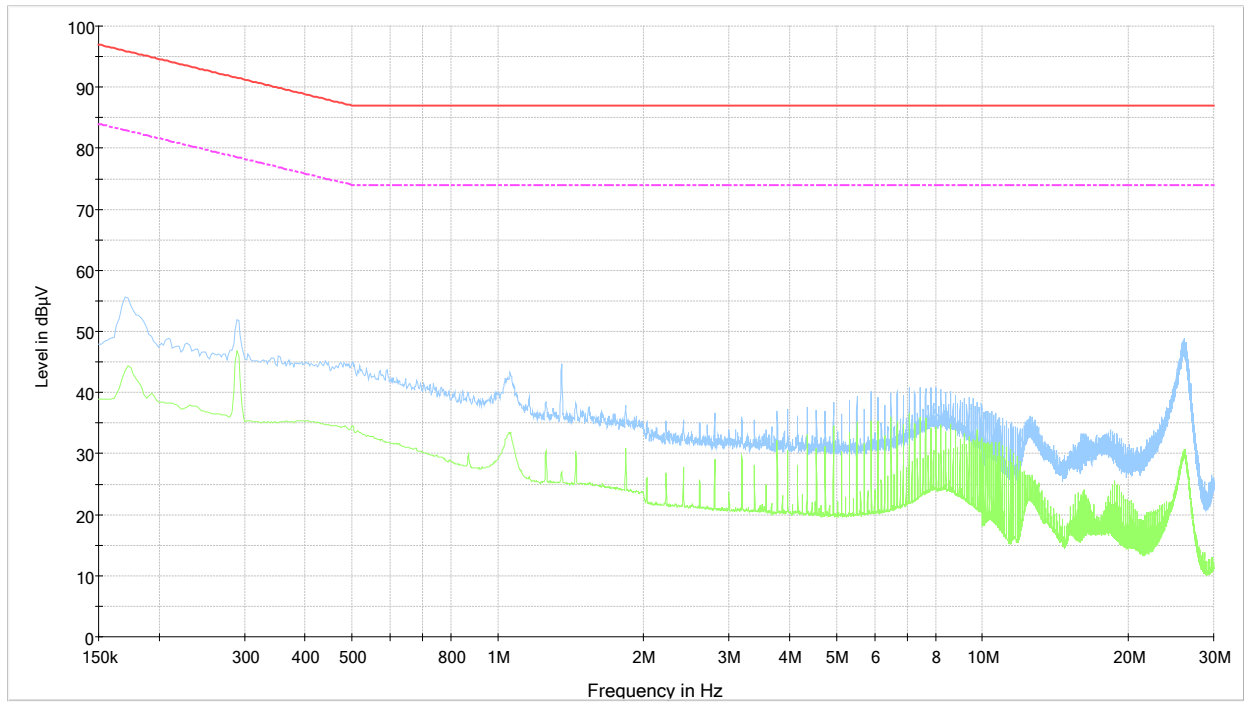

279276_Cond Em_CG2300_GbE_PCl_e_Port_Feb 24_2015

- CISPR 22 Telecom QP Class A - Voltage
- - - CISPR 22 Telecom AV Class A - Voltage
- Preview Result 1-PK+
- Preview Result 2-AVG

The spectral plot has been corrected with transducer factors. (i.e. cable loss, CDN and probe factor, and attenuators)

Figure 8.3-2: Conducted common mode (asymmetric mode) disturbance at telecommunication port spectral plot on GbE PCIe Port

8.3.6 Setup photos



Figure 8.3-3: *Conducted common mode (asymmetric mode) disturbance at telecommunication port setup photo*

8.4 Harmonic current emissions

8.4.1 References

EN 61000-3-2: 2014

8.4.2 Test summary

Verdict	Pass		
Test date	May 25, 2015	Temperature	23.7 °C
Test engineer	Daniel Hynes	Air pressure	1014.7 mbar
Test location	Montreal	Relative humidity	49.8 %

8.4.3 Notes

None

8.4.4 Setup details

Port under test	AC Mains
Measurement time	10 min

Table 8.4-1: Harmonic current emissions equipment list

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
Three phase power system	TESEQ	ProfLine 2115-400	FA002516	1 year	June 7/15

Notes: None

Table 8.4-2: Harmonic current emissions test software details

Manufacturer of Software	Details
TESEQ	WIN2100V4, Version 4.3.2


Notes: None

8.4.5 Test data

Measurement data


Harmonics – Class-A per Ed. 4.0 (2014)(Run time) incl. inter-harmonics

Current & voltage waveforms

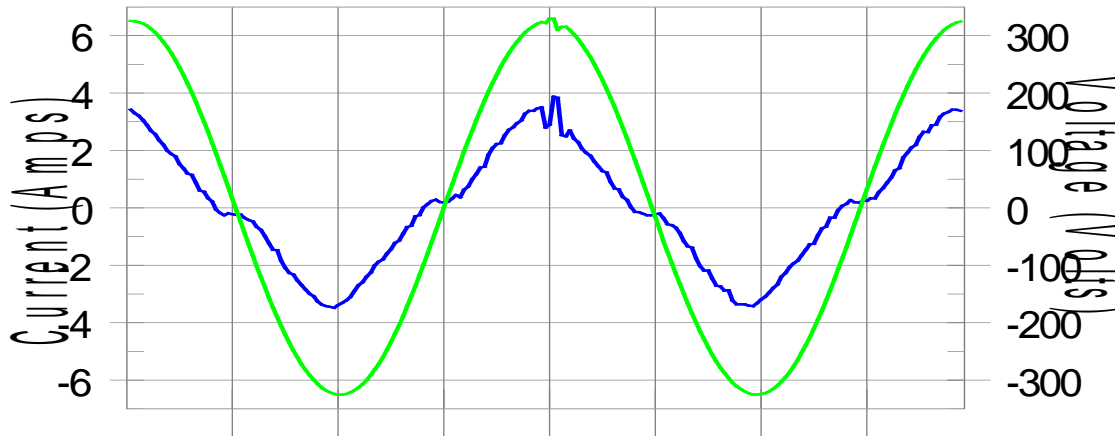

Harmonics and Class A limit line

European Limits

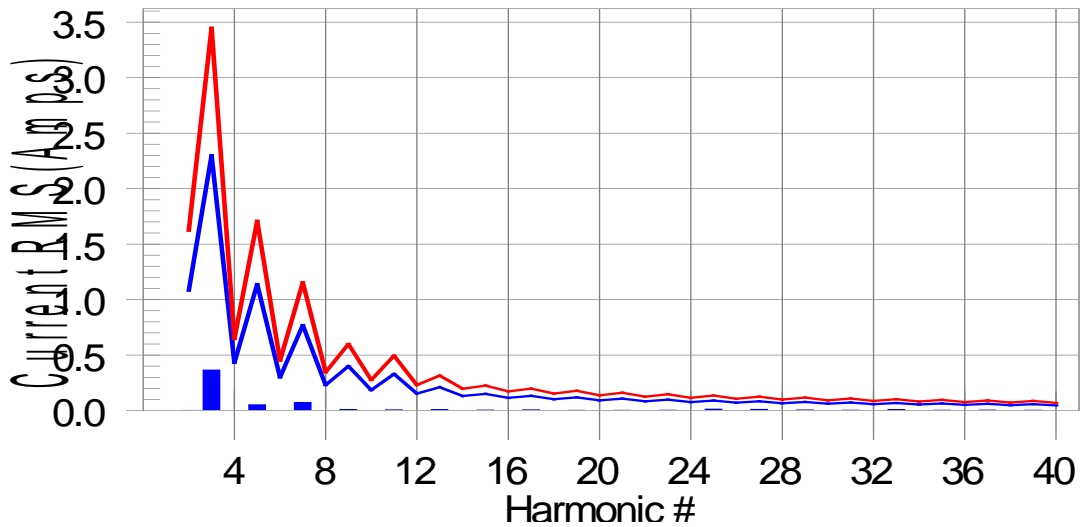

Worst harmonic was #3 with 15.9% of the limit.

8.4.5 Test data, continued

Measurement data, continued

Current Test Result Summary (Run time)

THC (A): 0.378 I-THD (%): 18.9 POHC (A): 0.018 POHC Limit (A): 0.251

Highest parameter values during test:

V_RMS (Volts):	230.08	Frequency(Hz):	50.00
I_Peak (Amps):	4.982	I_RMS (Amps):	2.124
I_Fund (Amps):	2.060	Crest Factor:	2.425
Power (Watts):	469.3	Power Factor:	0.973

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.003	1.080	N/A	0.004	1.620	N/A	Pass
3	0.366	2.300	15.9	0.380	3.450	11.0	Pass
4	0.002	0.430	N/A	0.003	0.645	N/A	Pass
5	0.054	1.140	4.7	0.057	1.710	3.3	Pass
6	0.001	0.300	N/A	0.002	0.450	N/A	Pass
7	0.075	0.770	9.7	0.076	1.155	6.6	Pass
8	0.001	0.230	N/A	0.001	0.345	N/A	Pass
9	0.011	0.400	N/A	0.013	0.600	N/A	Pass
10	0.001	0.184	N/A	0.001	0.276	N/A	Pass
11	0.008	0.330	N/A	0.009	0.495	N/A	Pass
12	0.001	0.153	N/A	0.002	0.230	N/A	Pass
13	0.009	0.210	N/A	0.011	0.315	N/A	Pass
14	0.001	0.131	N/A	0.001	0.197	N/A	Pass
15	0.006	0.150	N/A	0.006	0.225	N/A	Pass
16	0.001	0.115	N/A	0.001	0.173	N/A	Pass
17	0.008	0.132	N/A	0.009	0.198	N/A	Pass
18	0.001	0.102	N/A	0.002	0.153	N/A	Pass
19	0.004	0.118	N/A	0.004	0.178	N/A	Pass
20	0.001	0.092	N/A	0.002	0.138	N/A	Pass
21	0.004	0.107	N/A	0.005	0.161	N/A	Pass
22	0.001	0.084	N/A	0.002	0.125	N/A	Pass
23	0.005	0.098	N/A	0.006	0.147	N/A	Pass
24	0.001	0.077	N/A	0.002	0.115	N/A	Pass
25	0.014	0.090	15.2	0.014	0.135	10.7	Pass
26	0.001	0.071	N/A	0.002	0.107	N/A	Pass
27	0.012	0.083	14.8	0.013	0.125	10.4	Pass
28	0.001	0.066	N/A	0.002	0.099	N/A	Pass
29	0.007	0.078	N/A	0.008	0.116	N/A	Pass
30	0.001	0.061	N/A	0.002	0.092	N/A	Pass
31	0.005	0.073	N/A	0.007	0.109	N/A	Pass
32	0.001	0.058	N/A	0.002	0.086	N/A	Pass
33	0.008	0.068	N/A	0.009	0.102	N/A	Pass
34	0.001	0.054	N/A	0.002	0.081	N/A	Pass
35	0.005	0.064	N/A	0.006	0.096	N/A	Pass
36	0.001	0.051	N/A	0.002	0.077	N/A	Pass
37	0.006	0.061	N/A	0.008	0.091	N/A	Pass
38	0.001	0.048	N/A	0.002	0.073	N/A	Pass
39	0.005	0.058	N/A	0.006	0.087	N/A	Pass
40	0.001	0.046	N/A	0.002	0.069	N/A	Pass

8.4.5 Test data, continued

Measurement data, continued

Voltage Source Verification Data (Run time)

Highest parameter values during test:

Voltage (Vrms):	230.08	Frequency(Hz):	50.00
I_Peak (Amps):	4.982	I_RMS (Amps):	2.124
I_Fund (Amps):	2.060	Crest Factor:	2.425
Power (Watts):	469.3	Power Factor:	0.973

Harm#	Harmonics V-rms	Limit V-rms	% of Limit	Status
2	0.016	0.460	3.50	OK
3	0.479	2.071	23.14	OK
4	0.030	0.460	6.61	OK
5	0.034	0.920	3.71	OK
6	0.024	0.460	5.18	OK
7	0.044	0.690	6.42	OK
8	0.018	0.460	3.99	OK
9	0.048	0.460	10.49	OK
10	0.017	0.460	3.62	OK
11	0.017	0.230	7.54	OK
12	0.015	0.230	6.31	OK
13	0.012	0.230	5.05	OK
14	0.007	0.230	2.89	OK
15	0.011	0.230	4.65	OK
16	0.011	0.230	4.64	OK
17	0.010	0.230	4.50	OK
18	0.010	0.230	4.39	OK
19	0.009	0.230	4.08	OK
20	0.012	0.230	5.26	OK
21	0.008	0.230	3.34	OK
22	0.008	0.230	3.43	OK
23	0.008	0.230	3.62	OK
24	0.006	0.230	2.58	OK
25	0.013	0.230	5.79	OK
26	0.007	0.230	2.86	OK
27	0.012	0.230	5.29	OK
28	0.007	0.230	3.01	OK
29	0.008	0.230	3.61	OK
30	0.007	0.230	2.93	OK
31	0.008	0.230	3.60	OK
32	0.005	0.230	2.27	OK
33	0.014	0.230	6.06	OK
34	0.005	0.230	2.13	OK
35	0.008	0.230	3.44	OK
36	0.006	0.230	2.48	OK
37	0.013	0.230	5.77	OK
38	0.005	0.230	2.38	OK
39	0.011	0.230	4.65	OK
40	0.007	0.230	2.87	OK

8.4.6 Setup photos



Figure 8.4-1: *Harmonic current emissions setup photo*

8.5 Voltage fluctuations and flicker

8.5.1 References

EN 61000-3-3: 2013

8.5.2 Test summary

Verdict	Pass		
Test date	May 25, 2015	Temperature	23.7 °C
Test engineer	Daniel Hynes	Air pressure	1014.7 mbar
Test location	Montreal	Relative humidity	49.8 %

8.5.3 Notes

None

8.5.4 Setup details

Port under test	AC Mains
Measurement time	10 min

Table 8.5-1: Voltage fluctuations and flicker equipment list

Equipment	Manufacturer	Model no.	Asset no.	Cal cycle	Next cal.
Three phase power system	TESEQ	ProfLine 2115-400	FA002516	1 year	June 7/15

Notes: None

Table 8.5-2: Voltage fluctuations and flicker test software details

Manufacturer of Software	Details
TESEQ	WIN2100V4, Version 4.3.2

Notes: None


8.5.5 Test data

Measurement data


Flicker Test Summary per EN/IEC61000-3-3 (Run time)

Pst_t and limit line

European Limits

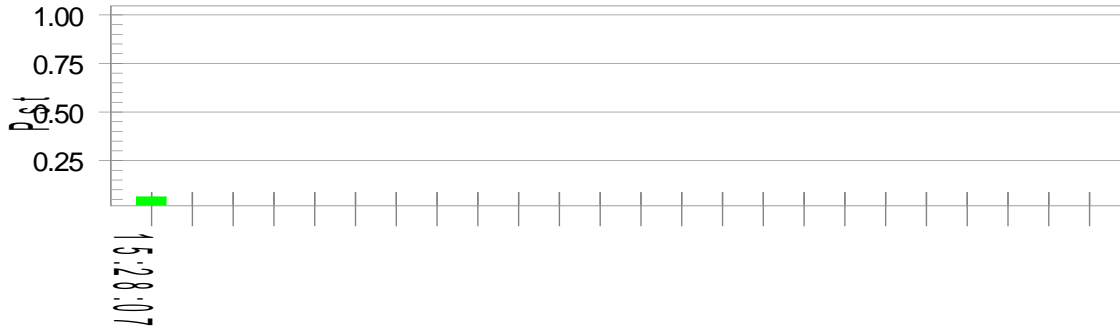

Plt and limit line

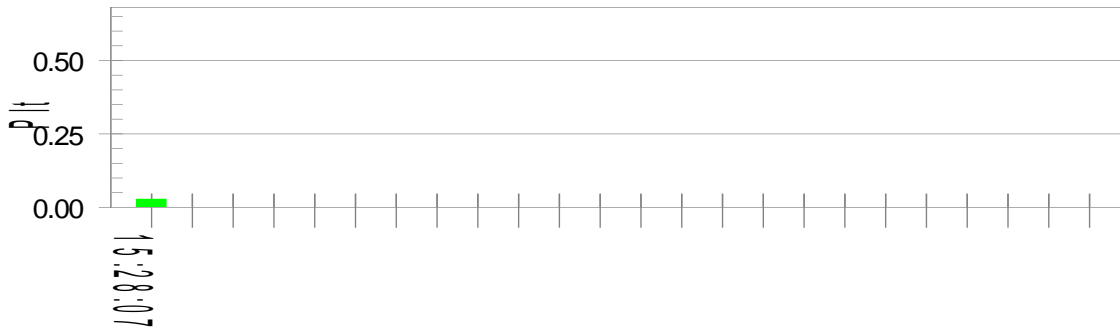

Parameter values recorded during the test:

Vrms at the end of test (Volt):	230.06			
Highest dt (%):	0.00	Test limit (%):	N/A	N/A
T-max (mS):	0	Test limit (mS):	500.0	Pass
Highest dc (%):	0.00	Test limit (%):	3.30	Pass
Highest dmax (%):	0.06	Test limit (%):	4.00	Pass
Highest Pst (10 min. period):	0.064	Test limit:	1.000	Pass
Highest Plt (2 hr. period):	0.028	Test limit:	0.650	Pass

8.5.6 Setup photos



Figure 8.5-1: Voltage fluctuations and flicker setup photo

Section 9 EUT photos

9.1 External photos



Figure 9.1-1: Front view photo



Figure 9.1-2: Rear view photo



Figure 9.1-3: Side view photo

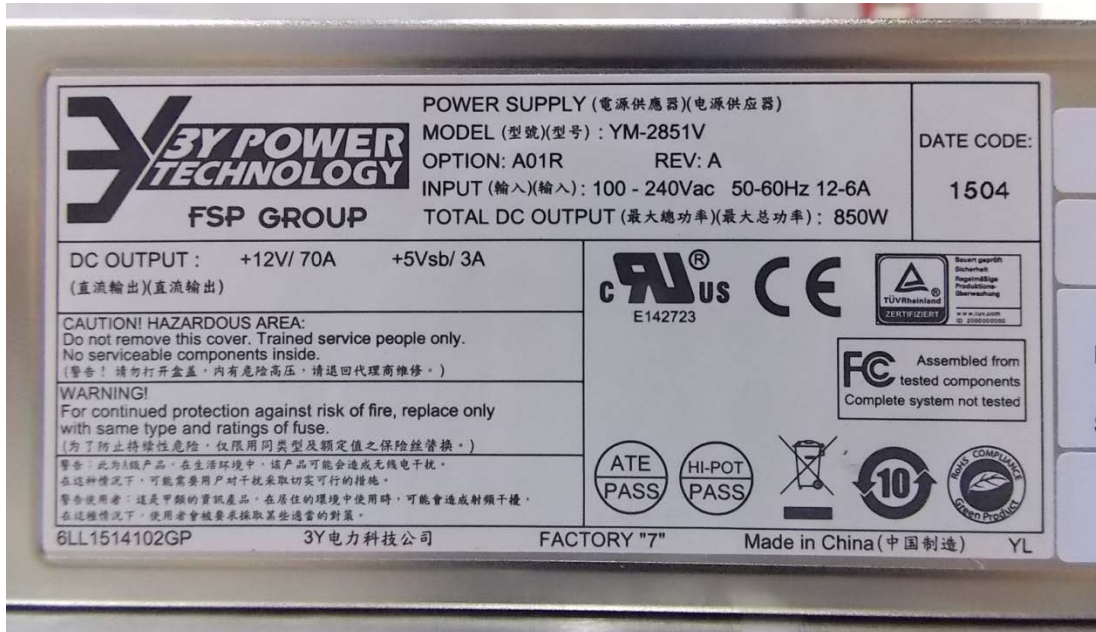


Figure 9.1-4: Other Photo



Figure 9.1-5: Other Photo