REV. NO	CONTENTS OF CHANGE	MODIFIED BY	APPROVED	MM / DD / YYYY
				/ /
				/ /
				/ /
				/ /
				/ /
				/ /

Notes.

1.E=22-ø1.2
2.Any foreign matters such as rust,contamination,dirt must not be attached.
3.This manufacturing process or handing of this material may require special health and/or safety precautions.
4.The side of burrs of hemming of the circumference must be 10% of the board thickness.
5.Unless otherwise specified, the tolerence must be less ±0.15mm or less,angle must be ±5° or less .
6.Mark * : critical to function dimension.





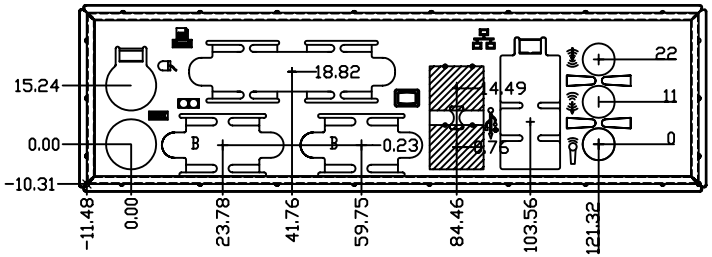





Ⓒ DETAIL C

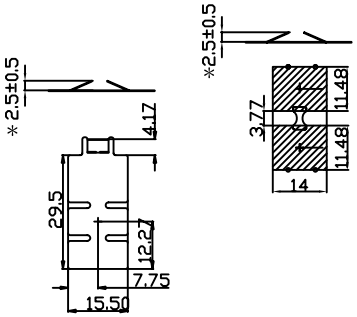



DETAIL B

TOL ± / RANGE	M1/IT10	M2/IT11	S1/IT12	S2/IT13	P1	P2	B/IT15	C/IT16
0~3	0.04	0.06	0.10	0.14	0.10	0.15	0.40	0.60
3~6	0.05	0.08	0.12	0.18	0.15	0.20	0.48	0.75
6~10	0.06	0.09	0.15	0.22	0.20	0.20	0.58	0.90
10~18	0.07	0.11	0.18	0.27	0.20	0.20	0.70	1.10
18~30	0.08	0.13	0.21	0.33	0.25	0.30	0.84	1.30
30~50	0.10	0.16	0.25	0.39	0.30	0.40	1.00	1.60
50~80	0.12	0.19	0.30	0.46	0.40	0.50	1.20	1.90
80~180	0.16	0.25	0.40	0.63	0.65	0.80	1.60	2.50
180~315	0.21	0.32	0.52	0.81	0.80	1.00	2.10	3.20
315~	0.25	0.40	0.63	0.97	1.20	1.50	2.50	4.00

3RD ANGLE PROJECTION	MATERIAL	SUS301_T=0.2MM	TREATMENT / TREATMENT / REV. MARK ①
	APPROVED BY/APPROVED BY	DRAWING NAME	886LCD M/Flex;M/ATX I/O SHIELD 50100140
SCALE 1/1	CHECKED BY/CHECKED BY	DRAWING NO.	S006512000003G
UNIT MM	DESIGNED BY/TC.CHU		Arima Computer Corp.
DATE 29/12/2005	DRAWN BY /TC.CHU		

Please,Don't measure dimension on drawing

FILE No.FILE_NO.

SHEET No. SHEET No. OF